


# ARISTA®

## IA600 / IC693

6" Adjustable Incandescent / Wall Wash Reflector With Spread Lens

Catalog Number	Type
Notes	

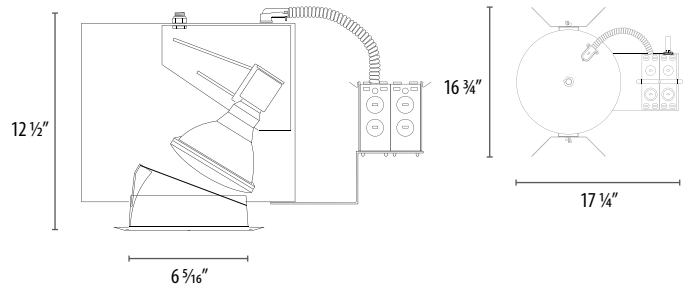

### Housing Matrix | Example: IA600-I100

Series		Options	
A		B	
A	Series	B	Options
IA600	6" Adjustable	-1100	C-Channel Bar Hanger
		-1200	Flat Bar Hanger
		-1400	Wood Joist Bar Hanger

### Trim Matrix | Example: IC693C-SFW

Series		Reflector Color	Flange
A		B	C
A	Series	C	Flange
IC693	6" Wall Wash With Spread Lens	-SF	Self Flanged
		-SFW	Self Flanged White
B	Reflector Color		
C	Clear		
HZ	Haze		

### Description:

Incandescent adjustable accent with 40° vertical adjustment and 358° rotation. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

### Reflector Optics:

Specification grade Alzak® 1.5mm thickness reflector. Designed with steep angle cut reflector and prismatic spread lens for general wall illumination. Available in clear or haze finish with polished indiscrete self flange, optional painted white flange available. Reflector is made in the USA.

### Lamp:

PAR30 75W max.  
PAR38 150W max.

### Socket:

E26 medium base

### Mounting Frame:

Frame is constructed from heavy duty black powder coated steel. Frame includes universal mounting brackets. C-channel bars and EMT are the preferred system for t-bar ceilings and flat bars are ideal for hard ceilings.

### Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.


# ARISTA®

## 6" Incandescent Accent Lamp Performance Data

Lamp data is extracted from lamp manufacturer's lamp photometrics.

FC= foot candles; L= beam length; W= beam width; D= distance; C= distance to center of beam; CP= candle power

Catalog Number	Type
Notes	

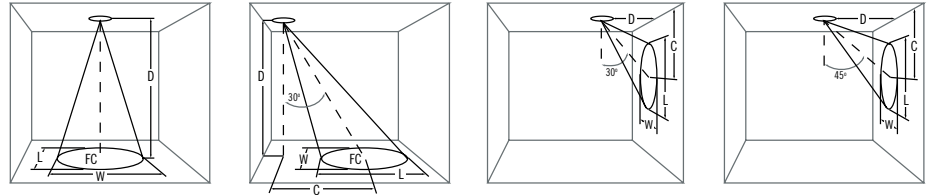

Lamp	Rated Life	CP	Beam Spread	0° Aiming					30° Aiming					30° Aiming					45° Aiming																																																																
				D	FC	W	L	C	D	FC	W	L	C	D	FC	W	L	C	D	FC	W	L	C																																																												
				50W PAR30 NSP	2500	9000	8°	7'	188	1.0'	1.0'	NA	6'	166	1.0'	1.1'	3.5'	2'	288	0.6'	1.1'	3.5'	4'	203	0.8'	1.1'	4.0'	10'	92	1.4'	1.4'	NA	9'	74	1.5'	1.7'	5.2'	3'	128	0.8'	1.7'	5.2'	6'	90	1.2'	1.7'	6.0'	13'	54	1.8'	1.8'	NA	12'	41	1.9'	2.2'	6.9'	4'	72	1.1'	2.3'	6.9'	8'	51	1.6'	2.2'	8.0'	16'	36	2.2'	2.2'	NA	15'	27	2.4'	2.8'	8.7'	5'	46	1.4'	2.6'	8.7'	10'
50W PAR30 FL	3000	2000	25°	4'	125	1.8'	1.8'	NA	3'	144	1.5'	1.8'	1.7'	1'	250	0.9'	2.1'	1.7'	3'	79	1.9'	2.8'	3.0'	10'	20	4.4'	4.4'	NA	9'	16	4.6'	5.4'	5.2'	4'	16	3.5'	8.3'	6.9'	6'	20	3.8'	5.6'	6.0'	8'	31	3.5'	3.5'	NA	7'	27	3.6'	4.2'	4.0'	3'	28	2.7'	6.2'	5.2'	5'	28	3.1'	4.7'	5.0'																				
50W PAR30 FL	3000	1400	35°	3'	156	1.9'	1.9'	NA	3'	101	2.2'	2.6'	1.7'	1'	175	1.3'	3.6'	1.7'	2'	124	1.8'	2.8'	2.0'	9'	17	5.7'	5.7'	NA	9'	11	6.6'	7.8'	5.2'	4'	11	5.0'	14.4'	6.9'	5'	20	4.5'	7.0'	5.0'	7'	29	4.4'	4.4'	NA	7'	19	5.1'	6.1'	4.0'	3'	19	3.6'	10.8'	5.2'	4'	31	3.6'	5.6'	4.0'																				
75W PAR30 NSP	2500	14000	9°	8'	219	1.3'	1.3'	NA	7'	186	1.3'	1.5'	4.0'	3'	194	0.9'	1.9'	5.2'	5'	196	1.1'	1.6'	5.0'	16'	35	3.1'	3.1'	NA	13'	54	2.4'	2.7'	7.5'	5'	70	1.6'	3.2'	8.7'	7'	101	1.6'	2.2'	7.0'	10'	97	1.9'	1.9'	NA	10'	91	1.8'	2.1'	5.8'	6'	49	1.9'	3.6'	10.4'	11'	41	2.4'	3.5'	11.0'																				
75W PAR30 NFL	2500	3200	30°	6'	89	3.2'	3.2'	NA	5'	83	3.1'	3.7'	2.9'	2'	100	2.1'	5.5'	3.5'	3'	126	2.3'	3.5'	3.0'	12'	22	6.4'	6.4'	NA	11'	17	6.8'	8.1'	6.4'	5'	16	5.4'	13.7'	8.7'	5'	45	3.8'	5.8'	5.0'	8'	50	4.3'	4.3'	NA	7'	42	4.3'	5.1'	4.0'	3'	44	3.2'	8.2'	5.2'	7'	23	5.3'	8.1'	7.0'																				
75W PAR30 FL	2500	2000	40°	4'	125	2.9'	2.9'	NA	3'	144	2.5'	3.0'	1.7'	1'	250	1.5'	4.8'	1.7'	3'	79	3.1'	5.0'	3.0'	10'	20	7.3'	7.3'	NA	9'	16	7.6'	9.1'	5.2'	4'	16	5.8'	19.3'	6.9'	6'	20	6.2'	10.1'	6.0'	8'	31	5.8'	5.8'	NA	7'	27	5.9'	7.1'	4.0'	3'	28	4.4'	14.5'	5.2'	5'	28	5.1'	8.4'	5.0'																				