

MR16-MXDSTL

3.5" MX MR16 Square Trimless Downlight

| | | | |
|-----------------|--|-----------------------|--|
| JOB NAME | | CATALOG NUMBER | |
| NOTES | | TYPE | |

| Catalog Number | Lamp Type | Socket Type | Maximum Wattage |
|-------------------------|-----------|-------------|-----------------------|
| MXT-STLx300-GU53 | 12V MR16 | GU5.3 | 15W LED / 20W Halogen |
| MXT-STLx300-GU10 | 120V MR16 | GU10 | 15W LED / 20W Halogen |

LAMP (ORDERED SEPARATELY)

- 12V MR16 GU5.3 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 1.83" (46.4mm)
- 12V MR16 GU5.3 Halogen 20W max. (must use MR16 with front cover glass) - lamp diameter up to 1.97" and MOL of 1.83"
- 120V MR16 GU10 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)
- 120V MR16 GU10 Halogen 20W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)

ELECTRICAL SYSTEM

- Power factor >.9, 50/60Hz
- Multiple electronic transformers available, dimming on 120V only
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

TRANSFORMERS (Check LED compatibility with lamp manufacturer):

- NT - GU10 without transformer with 120V input (20W max.)
- T1 - Hatch RS12-15(X)-LED 120V input/12V output 15W max., no minimum load
- T2 - Hatch RS12-60(X) 120V input/12V output 20W max., no minimum load
- T3 - Hatch RS12-80-277(X) 277V input/12V output 20W max., minimum load 10W (not recommended for LED)

HOUSING

Heavy duty black powder coated 18 gauge steel frame. Standard plaster frame accommodates 5/8" ceiling thickness. Extended collar options available for ceilings up to 1" or 2" thick, must specify.

TRIM SPECIFICATION

High quality trims are die-cast using A380 aluminum with durable powder coat available in multiple finishes. Perforated mesh frame is die-cast to a 0.8mm thickness to easily adhere to joint compound for seamless and trimless mounting. Trims available in 1 1/2" regress for greater visual comfort or 1/2" regress for consistent look throughout space.

INSTALLATION


Housing types include IC Air-Tight or Non-IC Rated (must specify). Non-IC rated housings must be kept at a minimum of 3" away from insulation. Butterfly brackets are compatible with adjustable bar hangers (14"-25") and EMT. Bar hangers must be ordered separately. Consult lamp manufacturer for maximum ambient temperature.

ACCESSORIES

Luminaire will accommodate (2) accessories, accessory holder required. See page 2.

LISTINGS

- ETL Listed to US and Canadian standards for damp locations
- (-AIC Only) Air Tight Certified ASTM E283
- (-AIC Only) ETL listed for direct contact w/insulation

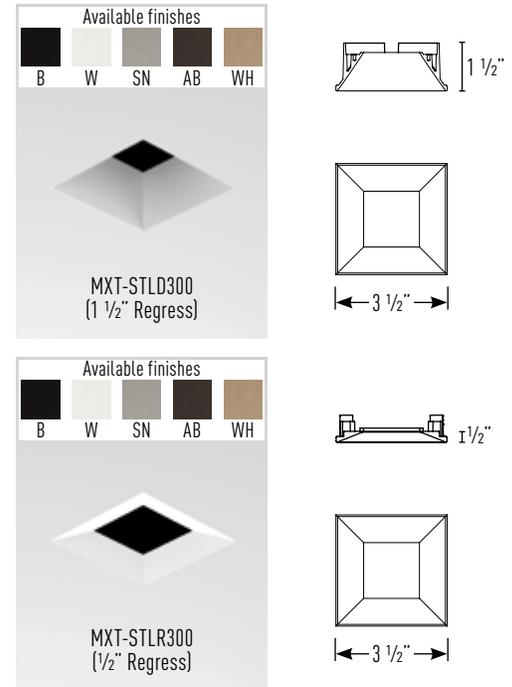

Housing dimensions are on Page 2

Housing Part Number (Example: MR16-MXDSTL-ICT1)

| Housing | Installation Type | Ceiling Thickness | Transformer | Options |
|--------------------|---------------------------|-------------------|--------------------------------------|--------------------------------------|
| MR16-MXDSTL | -NC (Non-IC) | blank (5/8") | NT (GU10 120V No Transformer) | I200 (Flat Bar Hangers) |
| | -IC (Air-Tight IC) | EC1 (1") | T1 (120V/12V RS12-15X-LED) | I400 (Wood Joist Bar Hangers) |
| | | EC2 (2") | T2 (120V/12V RS12-60X) | |
| | | | T3 (277V/12V RS12-80X) | |

Trim Part Number (Example: MXT-STLD300W-GU53)


| Trim | Finish | Base Type |
|--|----------------------------|--------------------------|
| MXT-STLD300 (1 1/2" Regress) | B (Black) | -GU53 (12V MR16) |
| | W (White) | -GU10 (120V MR16) |
| MXT-STLR300 (1/2" Regress) | SN (Satin Nickel) | |
| | AB (Antique Bronze) | |
| | WH (Wheat) | |

MR16-MXDSTL

3.5" MX MR16 Square Trimless Downlight

| | | | |
|-----------------|--|-----------------------|--|
| JOB NAME | | CATALOG NUMBER | |
| NOTES | | TYPE | |

NON-IC & AIR TIGHT IC DIMENSIONS

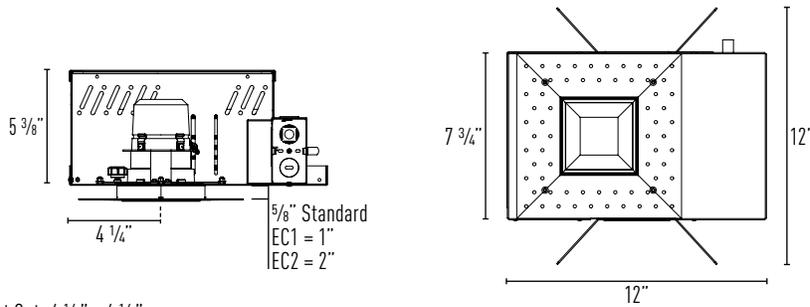

Ceiling Cut Out: 4 1/8" x 4 1/8"

ACCESSORIES

Luminaire will accommodate (2) accessories, accessory holder required.

INSTALLATION

1. Remove module from channel and disconnect quick connect.
2. Rotate release cap by turning counter clockwise. Remove two screws on release cap to remove integral sleeve.
3. Install accessories into accessory holder and replace accessory holder's retaining clip.
4. Place accessory holder and accessory against release cap and replace integral sleeve with two screws.
5. Replace release cap.

Accessories

- LH47** (Accessory Holder, Black)
- LH47W** (Accessory Holder, White)
- PFLMB-47** (Hex Louver, Black)
- PFL1-47** (Prismatic Spread Lens)
- PFL2-47** (Linear Spread Lens)
- PFL4-47** (Soft Focus Lens)

