


# ARISTA®

## IHMA6-CDM / IC695

6" Adjustable CDM-R111 Ceramic Metal Halide / Accent Reflector

| Catalog Number | Type |
|----------------|------|
|                |      |
| Notes          |      |
|                |      |

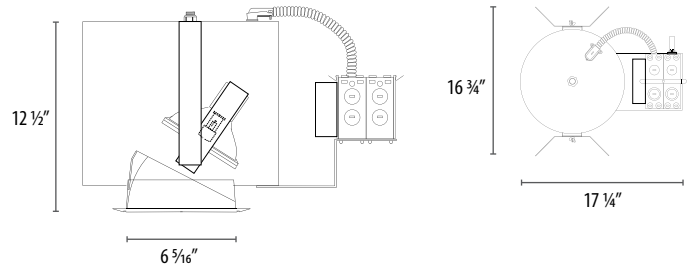

### Housing Matrix | Example : IHMA6-CDM070E-I100

| Series    | Lamp                           | Ballast | Options               |
|-----------|--------------------------------|---------|-----------------------|
| A         | B                              | C       | D                     |
| A         | Series                         | C       | Ballast               |
| IHMA6-CDM | 6" HID Metal Halide Adjustable | E       | Electronic 120/277V   |
| B         | Lamp                           | D       | Options               |
| 020       | 20W CDM-R111                   | -1100   | C-Channel Bar Hanger  |
| 035       | 35W CDM-R111                   | -1200   | Flat Bar Hanger       |
| 070       | 70W CDM-R111                   | -1400   | Wood Joist Bar Hanger |

### Trim Matrix | Example : IC695C-SFW

| Series | Reflector Color     | Flange |                    |
|--------|---------------------|--------|--------------------|
| A      | B                   | C      |                    |
| A      | Series              | C      | Flange             |
| IC695  | 6" Accent Reflector | -SF    | Self Flanged       |
| B      | Reflector Color     | -SFW   | Self Flanged White |
| C      | Clear               |        |                    |
| HZ     | Haze                |        |                    |

### Description:

CDM-R111 HID metal halide adjustable accent with 40° vertical adjustment and rotates 358°. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

### Reflector Optics:

Specification grade Alzak® 1.5mm thickness reflector. Designed with steep angle cut reflector for general wall illumination. Available in clear or haze finish with polished indiscrete self flange, optional painted white flange available. Reflector is made in the USA.

### Lamp:

CDM-R111 20/35/70W

### Socket:

GX8.5 Base

### Mounting Frame:

Frame is constructed from heavy duty black powder coated steel. Frame includes universal mounting brackets. C-channel bars and EMT are the preferred system for t-bar ceilings and flat bars are ideal for hard ceilings.

### Ballast:

High power factor electronic HID metal halide ballast.

- 120V or 277V input voltage at 50/60Hz
- High power factor
- Harmonic distortion < 15%
- Thermally protected
- Minimum ballast temp = -15°C
- Sound rated A
- NRTL listed

### Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.