


# ARISTA®

## IHMA6-T6 / IC695

6" Adjustable T6 HID Metal Halide / Accent Reflector

Catalog Number	Type
Notes	

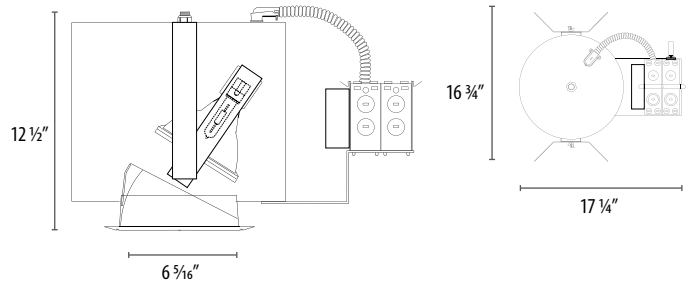

### Housing Matrix | Example: IHMA6-T6070E-NSP-I100

Series	Lamp	Ballast	Upper Reflector	Options
A	B	C	D	E
<b>A</b> Series			<b>D</b> Upper Reflector	
<b>IHMA6-T6</b>	6" HID Metal Halide Adjustable		-NSP Narrow Spot 15° -SP Spot 25° -FL Flood 45°	
<b>B</b> Lamp			<b>E</b> Options	
<b>020</b>	20W T6 G12		-1100 C-Channel Bar Hanger	
<b>039</b>	39W T6 G12		-1200 Flat Bar Hanger	
<b>070</b>	70W T6 G12		-1400 Wood Joist Bar Hanger	
<b>C</b> Ballast				
<b>E</b>	Electronic 120/277V			

### Trim Matrix | Example: IC695C-SFW

Series	Reflector Color	Flange
A	B	C
<b>A</b> Series		<b>C</b> Flange
<b>IC695</b>	6" Accent Reflector	-SF Self Flanged -SFW Self Flanged White
<b>B</b> Reflector Color		
<b>C</b> Clear		
<b>HZ</b> Haze		

### Description:

T6 HID metal halide adjustable accent with 40° vertical adjustment and rotates 358°. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

### Reflector Optics:

Reflector consists of 2 separate reflectors. Upper reflector: T6 reflector is available in a 15° narrow spot, 25° spot or a 45° flood. Lower reflector: Specification grade Alzak® 1.5mm thickness reflector. Designed with steep angle cut reflector for general wall illumination. Available in clear or haze finish with polished indiscrete self flange, optional painted white flange available. Reflector is made in the USA.

### Base:

G12 Base

### Mounting Frame:

Frame is constructed from heavy duty black powder coated steel. Frame includes universal mounting brackets. C-channel bars and EMT are the preferred system for t-bar ceilings and flat bars are ideal for hard ceilings.

### Ballast:

High power factor electronic HID metal halide ballast.  
 - 120V or 277V input voltage at 50/60Hz  
 - High power factor  
 - Harmonic distortion < 15%  
 - Thermally protected  
 - Minimum ballast temp = -15°C  
 - Sound rated A  
 - NRTL listed

### Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.