



SPEEDSHIP[™]

Select SKUs Shipped within 48-Hours



SpeedShip provides leading delivery service to match today's fast-paced construction environment. Products identified as **SpeedShip** are in-stock and ready to ship within 48 hours or less.

Matching Great Solutions with Great Service

PROGRAM DETAILS

- **NO SURCHARGE**
- **FREIGHT TERMS:**
All shipments are F.O.B. Seller's (Northbrook, IL). Full freight is allowed on orders shipped within the continental U.S. totaling \$3,000.00 or more.
- **DOMESTIC ORDERS ONLY**
- **TERMS & CONDITIONS**
 - **SpeedShip** items are limited to SKUs within the program
 - Maximum order quantity of 100 units per SKU
 - Consult factory for orders over 100 units
 - Products on mixed PO will ship within the longest lead time SKU on order
 - Order typos, errors or credit holds will disqualify a P.O. from **SpeedShip** program lead times
 - Normal Shipping Terms and Conditions apply
 - Standard Terms of Sale apply to all orders

TABLE OF CONTENTS

| | |
|-----------------------|---------------|
| TRACK LIGHTING | Pages 3 - 4 |
| DOWNLIGHTS | Pages 5 - 9 |
| STRIP LIGHTING | Pages 10 - 14 |
| EXIT LIGHTING | Page 15 |

CTL905 Series: Eclipse Curve

7W Eclipse Curve LED Track Luminaires

| PART NUMBER | WATTAGE/LM | BEAM | COLOR TEMP | CRI | FINISH |
|---------------|------------|-------|------------|-----|--------|
| CTL9050F3CD-B | 7W/651Lm | FLOOD | 3000K | 90+ | BLACK |
| CTL9050F3CD-P | 7W/651Lm | FLOOD | 3000K | 90+ | WHITE |

14W Eclipse Curve LED Track Luminaires

| PART NUMBER | WATTAGE/LM | BEAM | COLOR TEMP | CRI | FINISH |
|---------------|------------|-------|------------|-----|--------|
| CTL9052F3CD-B | 14W/1462Lm | FLOOD | 3000K | 90+ | BLACK |
| CTL9052F3CD-P | 14W/1462Lm | FLOOD | 3000K | 90+ | WHITE |

20W Eclipse Curve LED Track Luminaires

| PART NUMBER | WATTAGE/LM | BEAM | COLOR TEMP | CRI | FINISH |
|---------------|------------|-------|------------|-----|--------|
| CTL9053F3CD-B | 20W/2123Lm | FLOOD | 3000K | 90+ | BLACK |
| CTL9053F3CD-P | 20W/2123Lm | FLOOD | 3000K | 90+ | WHITE |



- Molded TIR optic provides a smooth uniform beam
- Precision aiming adjustment: 315° aiming horizontal rotation, 90° vertical rotation
- Can be used to comply with the Title 24 Part 6 JA8 High Efficacy LED Light Source Requirements

Gimbal Economy Series

CTL2830 PAR30S Gimbal

| PART NUMBER | MAX LAMP | DIMMING | FINISH |
|-------------|---|---------------|--------|
| CTL2830-B | 120V 75W PAR30 SHORT NECK LAMP, E26 MEDIUM BASE | FORWARD PHASE | BLACK |
| CTL2830-P | 120V 75W PAR30 SHORT NECK LAMP, E26 MEDIUM BASE | FORWARD PHASE | WHITE |

CTL2838N PAR38 Gimbal

| PART NUMBER | MAX LAMP | DIMMING | FINISH |
|-------------|---------------------------------------|---------------|--------|
| CTL2838N-B | 120V 250W PAR38 LAMP, E26 MEDIUM BASE | FORWARD PHASE | BLACK |
| CTL2838N-P | 120V 250W PAR38 LAMP, E26 MEDIUM BASE | FORWARD PHASE | WHITE |



- Two-plane Gimbal design
- 360° Horizontal swivel and 150° vertical adjustment
- Can accept Incandescent or equivalent LED lamps
- Lamp not included

Universal Economy Lampholder Series

CTL601 Universal Lampholder

| PART NUMBER | MAX LAMP | DIMMING | FINISH |
|-------------|---|---------------|--------|
| CTL601-B | 120V 50W PAR20, 75W PAR16, 75W PAR30 (SHORT OR LONG NECK), 250W PAR38 LAMP, E26 MEDIUM BASE | FORWARD PHASE | BLACK |

CTL603 Side Swivel Universal Lampholder

| PART NUMBER | MAX LAMP | DIMMING | FINISH |
|-------------|--|---------------|--------|
| CTL603-P | 120V 50W PAR20, 75W PAR16, 75W PAR30, 250W PAR38 LAMP, E26 MEDIUM SKIRTED BASE | FORWARD PHASE | BLACK |



- Adjustable socket for proper seating of various lamps
- Precise, rigid, sure-set aiming, full 350° rotation
- Lamp not included



- Vertical slide adjustment slot creates numerous luminaire heights
- Half-yoke mounting design minimizes luminaire presence
- Lamp not included

Single- and Two-Circuit Track Systems



- 120V/20A Rated Commercial Grade Track Sections
- Nominal length Track Sections can be cut in the field for exact fit

120V Single Circuit Track Sections

| PART NUMBER | TRACK LENGTH | FINISH |
|-------------|--|--------|
| LT-4-B | 4 FEET (48-INCHES) ; 44-1/8-INCHES ACTUAL LENGTH | BLACK |
| LT-4-P | 4 FEET (48-INCHES) ; 44-1/8-INCHES ACTUAL LENGTH | WHITE |
| LT-6-B | 6 FEET (72-INCHES); 68-1/8-INCHES ACTUAL LENGTH | BLACK |
| LT-6-P | 6 FEET (72-INCHES); 68-1/8-INCHES ACTUAL LENGTH | WHITE |
| LT-8-B | 8 FEET (96-INCHES); 92-1/8-INCHES ACTUAL LENGTH | BLACK |
| LT-8-P | 8 FEET (96-INCHES); 92-1/8-INCHES ACTUAL LENGTH | WHITE |
| LT-12-B | 12 FEET (144-INCHES); 140-1/8-INCHES ACTUAL LENGTH | BLACK |
| LT-12-P | 12 FEET (144-INCHES); 140-1/8-INCHES ACTUAL LENGTH | WHITE |

120V Single Circuit Track Accessories

| PART NUMBER | DESCRIPTION | FINISH |
|-------------|--|--------|
| LA-10-B | TOP ACCESS END FEED | BLACK |
| LA-10-P | TOP ACCESS END FEED | WHITE |
| LA-2-B | END-TO-END CONDUCTIVE MINI-CONNECTOR | BLACK |
| LA-2-P | END-TO-END CONDUCTIVE MINI-CONNECTOR | WHITE |
| LA-12-B | 3-WAY JOINER | BLACK |
| LA-12-P | 3-WAY JOINER | WHITE |
| LA-13-B | STANDARD POLARITY "T" CONNECTOR | BLACK |
| LA-13-P | STANDARD POLARITY "T" CONNECTOR | WHITE |
| LAC-180 | 180-INCH AIRCRAFT CABLE SUSPENSION KIT | N/A |



- 120V/40A (20A per circuit) Rated commercial grade track sections
- Each section of track contains two (2) hot (120V) conductors, plus a common neutral conductor; all ConTech track luminaires have two (2) position contacts to access either circuit
- Nominal length Track Sections can be cut in the field for exact fit

120V Two-Circuit Track Sections

| PART NUMBER | TRACK LENGTH | FINISH |
|-------------|--|--------|
| LT-24-P | 4 FEET (48-INCHES) ; 44-1/8-INCHES ACTUAL LENGTH | WHITE |
| LT-26-P | 6 FEET (72-INCHES); 68-1/8-INCHES ACTUAL LENGTH | WHITE |
| LT-28-P | 8 FEET (96-INCHES); 92-1/8-INCHES ACTUAL LENGTH | WHITE |

120V Two-Circuit Track Accessories

| PART NUMBER | DESCRIPTION | FINISH |
|-------------|--|--------|
| LA-210-P | 2-CIRCUIT TOP ACCESS END FEED | WHITE |
| LA-202-P | 2-CIRCUIT END-TO-END CONDUCTIVE MINI-CONNECTOR | WHITE |
| LA-212-P | 2-CIRCUIT 3-WAY JOINER | WHITE |
| LA-213-P | 2-CIRCUIT STANDARD POLARITY "T" CONNECTOR | WHITE |
| LAC-180 | 180-INCH AIRCRAFT CABLE SUSPENSION KIT | N/A |



Powerful lumen package in a highly desirable mini-housing. These diminutive downlights offer visual comfort and incredible design freedom. Ideal for commercial and retail accent lighting.


R2RM Series: 2-Inch Round Downlight

R2RM NC/Remodel Housing

| PART NUMBER | WATTAGE/LM | BEAM | CCT | CRI | DIMMING |
|----------------------|---|-------|-------|-----|----------------------|
| R2RM227KCMVDF | 14W/1400lm | FLOOD | 2700K | 90+ | 120/277V PHASE/0-10V |
| TRIM & FRAME OPTIONS | | | | | |
| PART NUMBER | DESCRIPTION | | | | |
| CST2322L-PL | ANODIZED PLATINUM SPECIFICATION GRADE REFLECTOR | | | | |
| CST2322L-WHT | MATTE WHITE PAINTED SPECIFICATION GRADE REFLECTOR | | | | |
| NCF1 | OPTIONAL NEW CONSTRUCTION MOUNTING FRAME | | | | |



- Duplex Electrical Connector simplifies daisy-chain wiring
- 2700K, 90+ CRI, Flood beam distribution
- Specification Grade Reflectors are Wet Location Certified without lensing

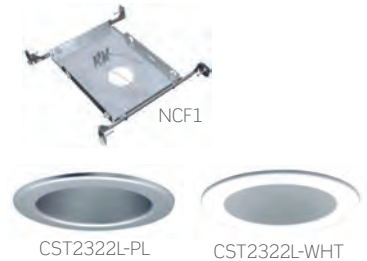

R2A Series: 2-Inch Round Adjustable Downlight

R2ANC Round Adjustable Downlight

HOUSING + MODULE + TRIM = COMPLETE SYSTEM

| HOUSING | | | |
|--|--|--------------------------------------|--------|
| PART NUMBER | WATTAGE/LM | DIMMING | |
| R2RM227KCMVDF | 14W/1400LM | 120/277V FORWARD/REVERSE PHASE/0-10V | |
| MODULE | | | |
| PART NUMBER | CCT | CRI | BEAM |
| UMOD27KCM | 2700KC | 90+ | MEDIUM |
| TRIM OPTIONS | | | |
| PART NUMBER | DESCRIPTION | | |
| NOTE: R2A series and R2RM series trims are not compatible with each other | | | |
| C2302-WHT ¹ | SPECIFICATION GRADE WHITE FULL CONE REFLECTOR | | |
| C2304-PL | SPECIFICATION GRADE PLATINUM ANGLE CUT REFLECTOR | | |
| C2304-WHT | SPECIFICATION GRADE WHITE ANGLE CUT REFLECTOR | | |
| 1. Wet Location Certified when used with an LF16 60MM Tempered Glass Lens | | | |



Universal Module

- Quick-connect Design for easy installation and removal of Universal Module
- Adjustment Mechanism has white graduation marks every 15° for consistent aiming; Set Screw locks the tilt adjustment in place
- Adjustability to 45° in a 1/2- to 1-inch thick ceiling, to 30° in a 1-1/2-inch ceiling



Insulated Ceiling (IC)/StopAire™ Housing

- For use in direct contact with insulation materials
- Driver is accessible from above or below the ceiling
- Spring Latch Tether to provide secondary support of the Universal Module





4- & 6-Inch Downlights

A high output multi-chip LED array arranged into a single package, enabling precise optical control without requiring diffusion lensing. Optically engineered to balance visual comfort while maintaining maximum output.

R4NC Series: 4-Inch Round New Construction Downlight

R4NC New Construction Downlight

| PART NUMBER | WATTAGE/LM | BEAM | CCT | CRI | DIMMING |
|--------------------|--|------|-------|-----|-------------|
| R4NC327K12D | 21W/2200lm | 120V | 2700K | 83 | PHASE/0-10V |
| TRIM | | | | | |
| PART NUMBER | DESCRIPTION | | | | |
| C4322M-CLR | SPEC. GRADE MEDIUM BEAM CLEAR SPECULAR REFLECTOR For Wet Location approved trim: Add "-C" for Clear Lens or "-SL" for Sandblast Lens after finish code | | | | |



C4322M-CLR

R6NC Series: 6-Inch Round New Construction Downlight

R6NC New Construction Downlight

| PART NUMBER | WATTAGE/LM | BEAM | CCT | CRI | DIMMING |
|--------------------|--|------|-------|-----|-------------|
| R6NC435K12D | 30W/3000lm | 120V | 3500K | 83 | PHASE/0-10V |
| TRIM | | | | | |
| PART NUMBER | DESCRIPTION | | | | |
| C6322W-CLR | SPEC. GRADE WIDE BEAM CLEAR SPECULAR REFLECTOR For Wet Location approved trim: Add "-C" for Clear Lens or "-SL" for Sandblast Lens after finish code | | | | |



C6322W-CLR

LD Series: 4-Inch Round Non-IC Flat Frame Downlight

LD4 Series

| PART NUMBER | WATTAGE/LM | VOLTAGE | DIMMING |
|---------------|------------|---------|---------|
| LD4NCL1D101 | 11W/1000LM | 120V | 0-10V |
| LD4NCL1D10127 | 11W/1000LM | 277V | 0-10V |
| LD4NCL2D101 | 17W/1500LM | 120V | 0-10V |
| LD4NCL2DIM | 17W/1500LM | 120V | PHASE |



LD4DR
Trim Assembly

- New Construction, Non-IC, Flat Frame
- Fits within less than 4-inch plenum space
- Die-Cast Aluminum Trim and Heat Sink with Quick-Connect Light Engine
- High Optical Transparency Diffusion Lens

LD Downlight Trims

| PART NUMBER | CCT | CRI | FINISH | MOUNTING |
|--------------|-------|-----|--------|--------------|
| LD4DR279W-SF | 2700K | 90 | WHITE | SELF-FLANGED |
| LD4DR309W-SF | 3000K | 90 | WHITE | SELF-FLANGED |
| LD4DR359W-SF | 3500K | 90 | WHITE | SELF-FLANGED |

SS Series: 4- & 6-Inch Non-IC New Construction Round Downlights

SS4 Series

| PART NUMBER | WATTAGE/LM | CCT | CRI | ELECTRICAL | DIMMING |
|--------------|------------|-------|-----|--------------------|---------|
| SS4G4DRL2308 | 13W/1500LM | 3000K | 80 | UNIVERSAL 120-277V | 0-10V |
| SS4G4DRL3358 | 17W/2000LM | 3500K | 80 | UNIVERSAL 120-277V | 0-10V |



Haze

Clear with Lens

White

- Non-IC New Construction Housings
- Specification Grade Reflectors in Clear Specular, Haze, or White; optional White Painted Flange or Clear Tempered Glass Lens
- Controlled light distribution at a 55° cut off

SS4 Series Trims

| PART NUMBER | TRIM TYPE |
|---------------|--|
| IC430C-SF | SPECULAR CLEAR REFLECTOR |
| IC432C-SF-CR | SPECULAR CLEAR REFLECTOR WITH CLEAR TEMPERED LENS |
| IC430C-SFW | SPECULAR CLEAR REFLECTOR WITH WHITE PAINTED FLANGE |
| IC430HZ-SF | HAZE REFLECTOR |
| IC430HZ-SF-CR | HAZE REFLECTOR WITH CLEAR TEMPERED LENS |
| IC430HZ-SFW | HAZE REFLECTOR WITH WHITE PAINTED FLANGE |
| IC430W-SF | WHITE REFLECTOR |

SS6 Series

| PART NUMBER | WATTAGE/LM | CCT | CRI | ELECTRICAL | DIMMING |
|--------------|------------|-------|-----|--------------------|---------|
| SS6G4DRL2358 | 13W/1500LM | 3500K | 80 | UNIVERSAL 120-277V | 0-10V |
| SS6G4DRL3358 | 17W/2000LM | 3500K | 80 | UNIVERSAL 120-277V | 0-10V |



Haze

Clear with Lens

White

- Non-IC New Construction Housings
- Specification Grade Reflectors in Clear Specular, Haze, or White; optional White Painted Flange or Clear Tempered Glass Lens
- Controlled light distribution at a 55° cut off

SS6 Series Trims

| PART NUMBER | TRIM TYPE |
|--------------|--|
| IC630C-SF | SPECULAR CLEAR REFLECTOR |
| IC632C-SF-CR | SPECULAR CLEAR REFLECTOR WITH CLEAR TEMPERED LENS |
| IC630C-SFW | SPECULAR CLEAR REFLECTOR WITH WHITE PAINTED FLANGE |
| IC630HZ-SF | HAZE REFLECTOR |
| IC630HZ-SFW | HAZE REFLECTOR WITH WHITE PAINTED FLANGE |
| IC630W-SF | WHITE REFLECTOR |

SS4 & SS6 Series Bar Hangers

| PART NUMBER | DESCRIPTION |
|-------------|--------------------------|
| I100 | C-CHANNEL BAR (PAIR) |
| I200 | FLAT BAR (PAIR) |
| I400 | ARCHITECTURAL BAR (PAIR) |



Leviton Lighting Downlights

A flexible downlighting solution designed for a wide range of applications. Selectable CCTs with High CRI. Closed Cell Gasket included for use in Wet Location environments.

Baffle Slim Downlights



- Available in 4-, 6- and 8-Inch diameter Rounds and 4- and 6-Inch Squares
- Requires only a 2-inch plenum

Round Baffle Slim Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|--------------|------------|--------------------|-----|--------|
| DBR40-S1W | 4-Inch Round | 10W/820Lm | 120V Phase Dimming | 90+ | WHITE |
| DBR60-S1W | 6-Inch Round | 13W/1100Lm | 120V Phase Dimming | 90+ | WHITE |
| DBR80-S1W | 8-Inch Round | 18W/1500Lm | 120V Phase Dimming | 90+ | WHITE |

Square Baffle Slim Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|---------------|------------|--------------------|-----|--------|
| DBS40-S1W | 4-Inch Square | 10W/820Lm | 120V Phase Dimming | 90+ | WHITE |
| DBS60-S1W | 6-Inch Square | 13W/1100Lm | 120V Phase Dimming | 90+ | WHITE |

Downlight Mounting Plates

| CATALOG NUMBER | APERTURE |
|----------------|--|
| DBRCX-H00 | 4-/6-Inch Round New Construction Mounting Plate |
| DBRUX-H00 | 4-/6-/8-Inch Round New Construction Mounting Plate |
| DBSUX-H00 | 4-/6-Inch Square New Construction Mounting Plate |

Adjustable Slim Downlights



- Available in 4- and 6-Inch diameter Rounds
- Fully adjustable floating gimbal design allows up to 80° of tilt and 350° of rotation

Adjustable Slim Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|--------------|------------|--------------------|-----|--------|
| DAR40-S1W | 4-Inch Round | 10W/820Lm | 120V Phase Dimming | 90+ | WHITE |
| DAR60-S1W | 6-Inch Round | 13W/1100Lm | 120V Phase Dimming | 90+ | WHITE |

Round Downlight Mounting Plates

| CATALOG NUMBER | DESCRIPTION |
|----------------|--|
| DBRCX-H00 | 4-/6-Inch Round New Construction Mounting Plate |
| DBRUX-H00 | 4-/6-/8-Inch Round New Construction Mounting Plate |

Fire-Rated Baffle Slim Downlights



- Available in 4- and 6-Inch diameter Rounds
- 2-Hour Fire-Rated, cETLus Listed in accordance with UL263, CAN/ULC S101 and ASTM E119

Fire-Rated Baffle Slim Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|------------|------------|--------------------|-----|--------|
| FBR40-S1W | 4-In Round | 12W/1000Lm | 120V Phase Dimming | 90+ | WHITE |
| FBR60-S1W | 6-In Round | 15W/1350Lm | 120V Phase Dimming | 90+ | WHITE |

Fire-Rated Round Downlight Accessories

| CATALOG NUMBER | DESCRIPTION |
|----------------|---|
| FB00X-ETW | 20-Ft. Extension Cable |
| DBRCX-H00 | 4-/6-Inch Round New Construction Mounting Plate |

Surface Mount Downlights

Surface Mount Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|------------|------------|--------------------|-----|--------|
| SDR50-S1W | 5-In Round | 12W/900Lm | 120V Phase Dimming | 90+ | WHITE |
| SDR70-S1W | 7-In Round | 15W/1100Lm | 120V Phase Dimming | 90+ | WHITE |
| SDR90-S1W | 9-In Round | 18W/1500Lm | 120V Phase Dimming | 90+ | WHITE |



- Available in 5-, 7- and 9-Inch diameter Rounds
- Driver-on-board design eliminates external driver for easy installation over most industry standard junction boxes
- Optional matte black trim ring accessories

Trim Rings

| CATALOG NUMBER | DESCRIPTION |
|----------------|------------------------------|
| SDR5X-T0E | 5-Inch Round Black Trim Ring |
| SDR7X-T0E | 7-Inch Round Black Trim Ring |
| SDR9X-T0E | 9-Inch Round Black Trim Ring |

Smooth Slim Downlights

| CATALOG NUMBER | APERTURE | WATTAGE/LM | DIMMING | CRI | FINISH |
|----------------|--------------|--------------------------|--------------------|-----|--------|
| DFR40-S1W | 4-Inch Round | 8W/650Lm; 10W/820Lm | 120V Phase Dimming | 90+ | WHITE |
| DFR60-S1W | 6-Inch Round | 10W/850Lm; 13W/1100Lm | 120V Phase Dimming | 90+ | WHITE |



- 4- and 6-Inch diameter Rounds; 1/2-Inch profile
- Selectable CCT: 2700K/3000K/3500K/4000K/5000K
- Selectable Lumen Output up to 1100 Lumens
- Optional matte black trim ring accessories

Trim Rings

| CATALOG NUMBER | DESCRIPTION |
|----------------|------------------------------|
| DFR4X-T0E | 4-Inch Round Black Trim Ring |
| DFR6X-T0E | 6-Inch Round Black Trim Ring |

Motion Sensor Downlight

| CATALOG NUMBER | APERTURE | WATTAGE/LM | CRI | FINISH |
|----------------|--------------|------------|-----|--------|
| 9866-BOW | 8-Inch Round | 18W/1440Lm | 80 | WHITE |



- 8-Inch diameter Round Downlight
- Automatic ON/OFF Motion Sensor, no wall switch required
- 360° Field of View, resistant to nuisance triggering
- Ceiling and wall mount



SpecFlex Strip Lighting

Flexible, linear luminaire systems that provide innovative lighting solutions. Available in a range of outputs, all with excellent color rendering and consistency.

Static White Strip Light



AFSS48 Medium Density Dry Location
48 LEDs/Ft, 95+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|---------------|-------|----------|-------|--------------|
| AFSS48-227K-R | 2W/FT | 247LM/FT | 2700K | 32.8 FT REEL |
| AFSS48-230K-R | 2W/FT | 247LM/FT | 3000K | 32.8 FT REEL |
| AFSS48-235K-R | 2W/FT | 247LM/FT | 3500K | 32.8 FT REEL |
| AFSS48-240K-R | 2W/FT | 247LM/FT | 4000K | 32.8 FT REEL |
| AFSS48-327K-R | 3W/FT | 363LM/FT | 2700K | 26.2 FT REEL |
| AFSS48-330K-R | 3W/FT | 363LM/FT | 3000K | 26.2 FT REEL |
| AFSS48-335K-R | 3W/FT | 363LM/FT | 3500K | 26.2 FT REEL |
| AFSS48-340K-R | 3W/FT | 363LM/FT | 4000K | 26.2 FT REEL |
| AFSS48-527K-R | 5W/FT | 580LM/FT | 2700K | 21.3 FT REEL |
| AFSS48-530K-R | 5W/FT | 580LM/FT | 3000K | 21.3 FT REEL |
| AFSS48-535K-R | 5W/FT | 580LM/FT | 3500K | 21.3 FT REEL |
| AFSS48-540K-R | 5W/FT | 580LM/FT | 4000K | 21.3 FT REEL |
| AFSS48-727K-R | 7W/FT | 774LM/FT | 2700K | 16.4 FT REEL |
| AFSS48-730K-R | 7W/FT | 774LM/FT | 3000K | 16.4 FT REEL |
| AFSS48-735K-R | 7W/FT | 774LM/FT | 3500K | 16.4 FT REEL |
| AFSS48-740K-R | 7W/FT | 774LM/FT | 4000K | 16.4 FT REEL |



AFSS48 Medium Density Wet Location
48 LEDs/Ft, 95+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|-----------------|-------|----------|-------|--------------|
| AFSS48-227K-7-R | 2W/FT | 224LM/FT | 2700K | 32.8 FT REEL |
| AFSS48-230K-7-R | 2W/FT | 224LM/FT | 3000K | 32.8 FT REEL |
| AFSS48-235K-7-R | 2W/FT | 224LM/FT | 3500K | 32.8 FT REEL |
| AFSS48-240K-7-R | 2W/FT | 224LM/FT | 4000K | 32.8 FT REEL |
| AFSS48-327K-7-R | 3W/FT | 323LM/FT | 2700K | 26.2 FT REEL |
| AFSS48-330K-7-R | 3W/FT | 323LM/FT | 3000K | 26.2 FT REEL |
| AFSS48-335K-7-R | 3W/FT | 323LM/FT | 3500K | 26.2 FT REEL |
| AFSS48-340K-7-R | 3W/FT | 323LM/FT | 4000K | 26.2 FT REEL |
| AFSS48-527K-7-R | 5W/FT | 529LM/FT | 2700K | 21.3 FT REEL |
| AFSS48-530K-7-R | 5W/FT | 529LM/FT | 3000K | 21.3 FT REEL |
| AFSS48-535K-7-R | 5W/FT | 529LM/FT | 3500K | 21.3 FT REEL |
| AFSS48-540K-7-R | 5W/FT | 529LM/FT | 4000K | 21.3 FT REEL |
| AFSS48-727K-7-R | 7W/FT | 701LM/FT | 2700K | 16.4 FT REEL |
| AFSS48-730K-7-R | 7W/FT | 701LM/FT | 3000K | 16.4 FT REEL |
| AFSS48-735K-7-R | 7W/FT | 701LM/FT | 3500K | 16.4 FT REEL |
| AFSS48-740K-7-R | 7W/FT | 701LM/FT | 4000K | 16.4 FT REEL |



AFSS48-7H Med. Density/High Efficacy Dry Location
48 LEDs/Ft, 95+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|----------------|-------|----------|-------|--------------|
| AFSS48-7H27K-R | 7W/FT | 909LM/FT | 2700K | 16.4 FT REEL |
| AFSS48-7H30K-R | 7W/FT | 909LM/FT | 3000K | 16.4 FT REEL |
| AFSS48-7H35K-R | 7W/FT | 909LM/FT | 3500K | 16.4 FT REEL |
| AFSS48-7H40K-R | 7W/FT | 909LM/FT | 4000K | 16.4 FT REEL |



AFSS48-7H Med. Density/High Efficacy Wet Location
48 LEDs/Ft, 95+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|------------------|-------|----------|-------|--------------|
| AFSS48-7H27K-7-R | 7W/FT | 814LM/FT | 2700K | 16.4 FT REEL |
| AFSS48-7H30K-7-R | 7W/FT | 814LM/FT | 3000K | 16.4 FT REEL |
| AFSS48-7H35K-7-R | 7W/FT | 814LM/FT | 3500K | 16.4 FT REEL |
| AFSS48-7H40K-7-R | 7W/FT | 814LM/FT | 4000K | 16.4 FT REEL |



AFSS73 High Density Dry Location
73 LEDs/Ft, 95+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|---------------|-------|----------|-------|--------------|
| AFSS73-327K-R | 3W/FT | 370LM/FT | 2700K | 26.2 FT REEL |
| AFSS73-330K-R | 3W/FT | 370LM/FT | 3000K | 26.2 FT REEL |
| AFSS73-335K-R | 3W/FT | 370LM/FT | 3500K | 26.2 FT REEL |
| AFSS73-340K-R | 3W/FT | 370LM/FT | 4000K | 26.2 FT REEL |
| AFSS73-527K-R | 5W/FT | 593LM/FT | 2700K | 21.3 FT REEL |
| AFSS73-530K-R | 5W/FT | 593LM/FT | 3000K | 21.3 FT REEL |
| AFSS73-535K-R | 5W/FT | 593LM/FT | 3500K | 21.3 FT REEL |
| AFSS73-540K-R | 5W/FT | 593LM/FT | 4000K | 21.3 FT REEL |
| AFSS73-727K-R | 7W/FT | 807LM/FT | 2700K | 16.4 FT REEL |
| AFSS73-730K-R | 7W/FT | 807LM/FT | 3000K | 16.4 FT REEL |
| AFSS73-735K-R | 7W/FT | 807LM/FT | 3500K | 16.4 FT REEL |
| AFSS73-740K-R | 7W/FT | 807LM/FT | 4000K | 16.4 FT REEL |



AFSS73 High Density Wet Location
73 LEDs/Ft, 95+ CRI


| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|-----------------|-------|----------|-------|--------------|
| AFSS73-327K-7-R | 3W/FT | 333LM/FT | 2700K | 26.2 FT REEL |
| AFSS73-330K-7-R | 3W/FT | 333LM/FT | 3000K | 26.2 FT REEL |
| AFSS73-335K-7-R | 3W/FT | 333LM/FT | 3500K | 26.2 FT REEL |
| AFSS73-340K-7-R | 3W/FT | 333LM/FT | 4000K | 26.2 FT REEL |
| AFSS73-527K-7-R | 5W/FT | 573LM/FT | 2700K | 21.3 FT REEL |
| AFSS73-530K-7-R | 5W/FT | 573LM/FT | 3000K | 21.3 FT REEL |
| AFSS73-535K-7-R | 5W/FT | 573LM/FT | 3500K | 21.3 FT REEL |
| AFSS73-540K-7-R | 5W/FT | 573LM/FT | 4000K | 21.3 FT REEL |
| AFSS73-727K-7-R | 7W/FT | 718LM/FT | 2700K | 16.4 FT REEL |
| AFSS73-730K-7-R | 7W/FT | 718LM/FT | 3000K | 16.4 FT REEL |
| AFSS73-735K-7-R | 7W/FT | 718LM/FT | 3500K | 16.4 FT REEL |
| AFSS73-740K-7-R | 7W/FT | 718LM/FT | 4000K | 16.4 FT REEL |

Static White Strip Light



**AFSSCN-5 Continuous COB
Dry Location**
Continuous LED, 90+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|---------------|---------|----------|-------|--------------|
| AFSSCN-521K-R | 4.6W/FT | 419LM/FT | 2100K | 16.4 FT REEL |
| AFSSCN-524K-R | 4.6W/FT | 419LM/FT | 2400K | 16.4 FT REEL |
| AFSSCN-527K-R | 4.6W/FT | 419LM/FT | 2700K | 16.4 FT REEL |
| AFSSCN-530K-R | 4.6W/FT | 419LM/FT | 3000K | 16.4 FT REEL |



**AFSSCN-5 Continuous COB
Wet Location**
Continuous LED, 90+ CRI

| PART NUMBER | W/FT | LM/FT | CCT | LENGTH |
|-----------------|---------|----------|-------|--------------|
| AFSSCN-521K-7-R | 4.6W/FT | 396LM/FT | 2100K | 16.4 FT REEL |
| AFSSCN-524K-7-R | 4.6W/FT | 396LM/FT | 2400K | 16.4 FT REEL |
| AFSSCN-527K-7-R | 4.6W/FT | 396LM/FT | 2700K | 16.4 FT REEL |
| AFSSCN-530K-7-R | 4.6W/FT | 396LM/FT | 3000K | 16.4 FT REEL |

Static Color & Color Changing Strip Light



**AFSD36 RGB
Dry Location**
36 LEDs/Ft

| PART NUMBER | W/FT | LENGTH |
|---------------|---------|--------------|
| AFSD36-4RGB-R | 4.4W/FT | 26.2 FT REEL |



**AFSD36 RGB
Wet Location**
36 LEDs/Ft

| PART NUMBER | W/FT | LENGTH |
|-----------------|---------|--------------|
| AFSD36-4RGB-7-R | 4.4W/FT | 26.2 FT REEL |




**AFSD58 RGBW
Dry Location**
58 LEDs/Ft, 95+ CRI White LEDs

| PART NUMBER | W/FT | WHITE LED CCT | LENGTH |
|-------------------|-------|---------------|--------------|
| AFSD58-7RGBW27K-R | 7W/FT | 2700K | 16.4 FT REEL |
| AFSD58-7RGBW30K-R | 7W/FT | 3000K | 16.4 FT REEL |



**AFSD58 RGBW
Wet Location**
58 LEDs/Ft, 95+ CRI White LEDs

| PART NUMBER | W/FT | WHITE LED CCT | LENGTH |
|---------------------|-------|---------------|--------------|
| AFSD58-7RGBW27K-7-R | 7W/FT | 2700K | 16.4 FT REEL |
| AFSD58-7RGBW30K-7-R | 7W/FT | 3000K | 16.4 FT REEL |



**AFSD42 Static Color
Dry Location**
42 LEDs/Ft

| PART NUMBER | W/FT | LED COLOR | LENGTH |
|-------------|-------|-----------|--------------|
| AFSS42-5A-R | 5W/FT | Amber | 21.3 FT REEL |
| AFSS42-5B-R | 5W/FT | Blue | 21.3 FT REEL |
| AFSS42-5G-R | 5W/FT | Green | 21.3 FT REEL |
| AFSS42-5R-R | 5W/FT | Red | 21.3 FT REEL |




**AFSD42 Static Color
Wet Location**
42 LEDs/Ft

| PART NUMBER | W/FT | LED COLOR | LENGTH |
|---------------|-------|-----------|--------------|
| AFSS42-5A-7-R | 5W/FT | Amber | 21.3 FT REEL |
| AFSS42-5B-7-R | 5W/FT | Blue | 21.3 FT REEL |
| AFSS42-5G-7-R | 5W/FT | Green | 21.3 FT REEL |
| AFSS42-5R-7-R | 5W/FT | Red | 21.3 FT REEL |



Power Supplies and Accessories

| PART NUMBER | DESCRIPTION |
|--------------------|--|
| AFCW2Y-S | 2-WAY, LOW VOLTAGE SPLITTER (MALE TO FEMALE), SCREW CONNECTORS, CMP, WET RATED, GRAY |
| AFCW3Y-S | 3-WAY, LOW VOLTAGE SPLITTER (MALE TO FEMALE), SCREW CONNECTORS, CMP, WET RATED, GRAY |
| AFCWDC6F-S | 6" DRIVER STRAIN RELIEF, FEMALE SCREW CONNECTOR, CMP RATED, GRAY |
| AFCWEX120-S | 120" LOW VOLTAGE EXTENSION CABLE, SCREW CONNECTORS, CMP, WET RATED, GRAY |
| AFCWEX36-S | 36" LOW VOLTAGE EXTENSION CABLE, SCREW CONNECTORS, CMP, WET RATED, GRAY |
| AFCWPF72-S | 72" POWERFEED CABLE, FEMALE SCREW CONNECTOR, CMP RATED, GRAY |
| AFCWPM72-S | 72" POWERFEED CABLE, MALE SCREW CONNECTOR, CMP RATED, GRAY |
| TLP12VP24 | POWER SUPPLY, 24W 12V PLUG |
| TLP12VP36 | POWER SUPPLY, 36W 12V PLUG |
| TLP24VHW100MVD-ENC | DRIVER, 96W 24V 120-277VAC, 0-10V AND PHASE DIMMING |
| TLP24VHW20 | POWER SUPPLY, 20W 24V HARDWIRE |
| TLP24VHW60 | POWER SUPPLY, 60W 24V HARDWIRE |
| TLP24VHW60MV-ENC | DRIVER, 60W 24V 120-277VAC, NON-DIM |
| TLP24VHW60MVD-ENC | DRIVER, 60W 24V 120-277VAC, 0-10V AND PHASE DIMMING |
| TLP24VHW60MVD2-ENC | DRIVER, 60W 24V 120-277VAC, 0-10V |
| TLP24VHW96 | POWER SUPPLY, 96W 24V HARDWIRE |
| TLP24VHW96MV-ENC | DRIVER, 96W 24V 120-277VAC, NON-DIM |
| TLP24VHW96MVD2-ENC | DRIVER, 96W 24V 120-277VAC, 0-10V |
| TLP24VP36 | POWER SUPPLY, 36W 24V PLUG-N-PLAY |
| TLP24VP60 | POWER SUPPLY, 60W 24V PLUG-N-PLAY |
| TLP24VP96 | POWER SUPPLY, 96W 24V PLUG-N-PLAY |
| TLPINT | INTERFACE, DMX |
| TLPO12VP36 | 36W Power Supply, Outdoor |
| TLPO12VP60 | 60W Power Supply, Outdoor |
| TLPORGBRMT | RGB Remote, Outdoor |
| TLPRGBRF | CONTROLLER, RF RGB |
| TLPRGBWRF | RGBW REMOTE CONTROLLER |
| TLPRGBWTC | RGBW TOUCH CONTROLLER |
| TLPRTW | REPEATER, RUN EXTENDER, RGBW |
| TLPSWT | SWITCH, ONE TO ONE CONNECTOR ON/OFF |



Mounting Channels and Accessories

- Excellent thermal management and heat dissipation while ensuring a clean, straight run
- Field cuttable 6-foot long, high-quality Anodized Satin Aluminum Channels with coordinating Stainless Steel Mounting Clips
- Endcaps are ordered individually; one (1) solid Endcap (without hole) and one (1) open (with hole for wiring)
- Channel, Diffusion Lens, Endcaps, and Mounting Clips are ordered separately

| PART NUMBER | DESCRIPTION |
|--------------------|---|
| AFEX1012S-EC | STANDARD NARROW CHANNEL END CAP, GREY |
| AFEX1012S-ECH | STANDARD NARROW CHANNEL END CAP WITH HOLE, GREY |
| AFEX1012S-ECS | NARROW SURFACE CHANNEL END CAP WITH SLOT, GREY |
| AFEX1012S72-S | 6FT STANDARD NARROW MOUNTING CHANNEL, ALUMINUM |
| AFEX1016A-EC | 45° ANGLED CHANNEL END CAP, GREY |
| AFEX1016A-ECH | 45° ANGLED CHANNEL END CAP WITH HOLE, GREY |
| AFEX1016A-ECS | 45° ANGLED CHANNEL END CAP WITH SLOT, GREY |
| AFEX1016A-MC | 45° ANGLED CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX1016A-MC4 | PACK OF FOUR (4) 45° ANGLED CHANNEL MOUNTING CLIPS, STAINLESS STEEL WITH SCREWS AND ANCHORS |
| AFEX1016A72-S | 6FT 45° ANGLED MOUNTING CHANNEL, ALUMINUM |
| AFEX1112BEAMS-AMC | BEAM FOCUSING CHANNEL ADJUSTABLE MOUNTING CLIPS, GREY |
| AFEX1112BEAMS-AMC6 | PACK OF SIX (6) BEAM FOCUSING CHANNEL ADJUSTABLE MOUNTING CLIPS, GREY |
| AFEX1112BEAMS-EC | BEAM FOCUSING CHANNEL END CAP, GREY |
| AFEX1112BEAMS-ECH | BEAM FOCUSING CHANNEL END CAP WITH HOLE, GREY |
| AFEX1112BEAMS-MC | BEAM FOCUSING CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX1112BEAMS-MC4 | PACK OF FOUR (4) BEAM FOCUSING CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX1112BEAMS78-S | BEAM FOCUSING MOUNTING CHANNEL WITH ADJUSTABLE INSERT, 78-IN, ALUMINUM |
| AFEX1209R-EC | RECESSED SHALLOW CHANNEL END CAP, GREY |
| AFEX1209R-ECH | RECESSED SHALLOW CHANNEL END CAP WITH HOLE, GREY |
| AFEX1209R-ECS | SHALLOW RECESSED CHANNEL END CAP WITH SLOT, GREY |
| AFEX1209R72-S | 6FT RECESSED SHALLOW MOUNTING CHANNEL, ALUMINUM |
| AFEX1209S-EC | STANDARD SHALLOW CHANNEL END CAP, GREY |
| AFEX1209S-ECH | STANDARD SHALLOW CHANNEL END CAP WITH HOLE, GREY |
| AFEX1209S-ECS | SHALLOW SURFACE CHANNEL END CAP WITH SLOT, GREY |
| AFEX1209S72-S | 6FT STANDARD SHALLOW MOUNTING CHANNEL, ALUMINUM |
| AFEX1215R-EC | RECESSED DEEP CHANNEL END CAP, GREY |
| AFEX1215R-ECH | RECESSED DEEP CHANNEL END CAP WITH HOLE, GREY |
| AFEX1215R-ECS | DEEP RECESSED CHANNEL END CAP WITH SLOT, GREY |
| AFEX1215R-MC | RECESSED DEEP CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX1215R-MC4 | PACK OF FOUR (4) DEEP RECESSED CHANNEL MOUNTING CLIPS, STAINLESS STEEL WITH SCREWS AND ANCHORS |
| AFEX1215R72-S | 6FT RECESSED DEEP MOUNTING CHANNEL, ALUMINUM |
| AFEX1215S-EC | STANDARD DEEP CHANNEL END CAP, GREY |
| AFEX1215S-ECH | STANDARD DEEP CHANNEL END CAP WITH HOLE, GREY |
| AFEX1215S-ECS | DEEP SURFACE CHANNEL END CAP WITH SLOT, GREY |
| AFEX1215S72-S | 6FT STANDARD DEEP MOUNTING CHANNEL, ALUMINUM |
| AFEX12S-MC | STANDARD SHALLOW CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX12S-MC4 | PACK OF FOUR (4) STANDARD SHALLOW CHANNEL MOUNTING CLIPS, STAINLESS STEEL WITH SCREWS AND ANCHORS |
| AFEX1315D-EC | MUD-IN CHANNEL END CAP, GREY |
| AFEX1315D-ECH | MUD-IN CHANNEL END CAP WITH HOLE, GREY |
| AFEX1315D-ECS | MUD-IN CHANNEL END CAP WITH SLOT, GREY |
| AFEX1315D72-S | MUD-IN FLAT WALL MOUNTING CHANNEL, ALUMINUM |
| AFEX1315DIN72-S | MUD-IN FLAT INTERIOR CORNER MOUNTING CHANNEL, ALUMINUM |
| AFEX1315DOUT72-S | MUD-IN FLAT EXTERIOR CORNER MOUNTING CHANNEL, ALUMINUM |
| AFEX1318A-EC | 45° ANGLED WIDE CHANNEL END CAP, GREY |
| AFEX1318A-ECH | 45° ANGLED WIDE CHANNEL END CAP WITH HOLE, GREY |
| AFEX1318A-ECS | 45° ANGLED WIDE CHANNEL END CAP WITH SLOT, GREY |

Mounting Channels and Accessories, Continued

| PART NUMBER | DESCRIPTION |
|---------------|---|
| AFEX1318A-MC | 45° ANGLED WIDE CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX1318A-MC4 | PACK OF FOUR (4) 45° ANGLED WIDE CHANNEL MOUNTING CLIPS, STAINLESS STEEL WITH SCREWS AND ANCHORS |
| AFEX1318A72-S | 6FT 45° ANGLED WIDE MOUNTING CHANNEL, ALUMINUM |
| AFEX1508S72-S | 6FT WIDE MOUNTING CHANNEL, ALUMINUM |
| AFEX2011R-EC | RECESSED DOUBLE WIDE CHANNEL END CAP, GREY |
| AFEX2011R-ECH | RECESSED DOUBLE WIDE CHANNEL END CAP WITH HOLE, GREY |
| AFEX2011R-ECS | EXTRA WIDE RECESSED CHANNEL END CAP WITH SLOT, GREY |
| AFEX2011R72-S | 6FT RECESSED DOUBLE WIDE MOUNTING CHANNEL, ALUMINUM |
| AFEX2011S-EC | STANDARD DOUBLE WIDE CHANNEL END CAP, GREY |
| AFEX2011S-ECH | STANDARD DOUBLE WIDE CHANNEL END CAP WITH HOLE, GREY |
| AFEX2011S-ECS | EXTRA WIDE SURFACE CHANNEL END CAP WITH SLOT, GREY |
| AFEX2011S-MC | STANDARD DOUBLE WIDE CHANNEL MOUNTING CLIPS, STAINLESS STEEL |
| AFEX2011S-MC4 | PACK OF FOUR (4) EXTRA WIDE SURFACE CHANNEL MOUNTING CLIPS, STAINLESS STEEL WITH SCREWS AND ANCHORS |
| AFEX2011S72-S | 6FT STANDARD DOUBLE WIDE MOUNTING CHANNEL, ALUMINUM |
| AFEX2030A-EC | 45° ANGLED DOUBLE WIDE CHANNEL END CAP, GREY |
| AFEX2030A-ECH | 45° ANGLED DOUBLE WIDE CHANNEL END CAP WITH HOLE, GREY |
| AFEX2030A-ECS | 45° ANGLED EXTRA WIDE CHANNEL END CAP WITH SLOT, GREY |
| AFEX2030A72-S | 6FT 45° ANGLED DOUBLE WIDE MOUNTING CHANNEL, ALUMINUM |
| AFL10A72-FR | 6FT 45° ANGLED CHANNEL DIFFUSION LENS, FROSTED |
| AFL10S72-FR | 6FT STANDARD NARROW CHANNEL DIFFUSION LENS, FROSTED |
| AFL1272-FR | 6FT STANDARD CHANNEL DIFFUSION LENS, FROSTED |
| AFL1315D72-FR | MUD-IN CHANNEL DIFFUSION LENS, FROSTED |
| AFL1372-FR | 6FT 45° ANGLED WIDE CHANNEL DIFFUSION LENS, FROSTED |
| AFL1572-FR | 6FT WIDE CHANNEL DIFFUSION LENS, FROSTED |
| AFL2072-FR | 6FT STANDARD DOUBLE WIDE DIFFUSION LENS, FROSTED |
| AFL20A72-FR | 6FT 45° ANGLED DOUBLE WIDE CHANNEL DIFFUSION LENS, FROSTED |

REXA Series: Recessed or Surface Mount Adjustable Edge-Lit Exit Sign with Battery Back-up



- Single or Double Face configuration
- Universal Mounting Options: Wall, Ceiling, Side, and Recessed Mount
- Single or Double Face configuration
- For New Construction, Lay-in Ceilings, or where accessibility above the ceiling is available
- Pendant Stem Kit Available

REXA Series Exit Sign

| PART NUMBER | FACEPLATE | LETTERING | BACKGROUND | FINISH |
|--------------|-------------------|-----------|------------|--------|
| REXADFGEMC-B | DOUBLE FACE | GREEN | MIRRORED | BLACK |
| REXADFGEMC-P | DOUBLE FACE | GREEN | MIRRORED | WHITE |
| REXADFREMC-B | DOUBLE FACE | RED | MIRRORED | BLACK |
| REXADFREMC-P | DOUBLE FACE | RED | MIRRORED | WHITE |
| REXADFREMW-B | DOUBLE FACE | RED | WHITE | BLACK |
| REXAMFGEM-B | SINGLE FACE PANEL | GREEN | CLEAR | BLACK |
| REXAMFGEM-P | SINGLE FACE PANEL | GREEN | CLEAR | WHITE |
| REXAMFGEM-S | SINGLE FACE PANEL | GREEN | CLEAR | SILVER |
| REXAMFREM-B | SINGLE FACE PANEL | RED | CLEAR | BLACK |
| REXAMFREM-P | SINGLE FACE PANEL | RED | CLEAR | WHITE |
| REXAMFREM-S | SINGLE FACE PANEL | RED | CLEAR | SILVER |
| REXASFGEM-B | SINGLE FACE | GREEN | CLEAR | BLACK |
| REXASFGEM-P | SINGLE FACE | GREEN | CLEAR | WHITE |
| REXASFGEMC-B | SINGLE FACE | GREEN | MIRRORED | BLACK |
| REXASFGEMC-P | SINGLE FACE | GREEN | MIRRORED | WHITE |
| REXASFREM-B | SINGLE FACE | RED | CLEAR | BLACK |
| REXASFREM-P | SINGLE FACE | RED | CLEAR | WHITE |
| REXASFREMC-B | SINGLE FACE | RED | MIRRORED | BLACK |
| REXASFREMC-P | SINGLE FACE | RED | MIRRORED | WHITE |

REXA Series Stem Kit

| PART NUMBER | DESCRIPTION | FINISH |
|----------------------|--------------|--------|
| REXA-12IN-STEM-KIT-B | 12" STEM KIT | BLACK |
| REXA-12IN-STEM-KIT-P | 12" STEM KIT | WHITE |
| REXA-12IN-STEM-KIT-S | 12" STEM KIT | SILVER |
| REXA-18IN-STEM-KIT-B | 18" STEM KIT | BLACK |
| REXA-18IN-STEM-KIT-P | 18" STEM KIT | WHITE |
| REXA-18IN-STEM-KIT-S | 18" STEM KIT | SILVER |
| REXA-24IN-STEM-KIT-B | 24" STEM KIT | BLACK |
| REXA-24IN-STEM-KIT-P | 24" STEM KIT | WHITE |
| REXA-24IN-STEM-KIT-S | 24" STEM KIT | SILVER |
| REXA-36IN-STEM-KIT-B | 36" STEM KIT | BLACK |
| REXA-36IN-STEM-KIT-P | 36" STEM KIT | WHITE |
| REXA-36IN-STEM-KIT-S | 36" STEM KIT | SILVER |
| REXA-48IN-STEM-KIT-B | 48" STEM KIT | BLACK |
| REXA-48IN-STEM-KIT-P | 48" STEM KIT | WHITE |
| REXA-48IN-STEM-KIT-S | 48" STEM KIT | SILVER |



Birchwood
ConTech
Intense



Member of
IALDLIRC

GBCI™

