

Track Current Limiting Feeds

Single Circuit Track System

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

IS125



IS126




IS135



Order Matrix | Example: IS225W-2A

A		B		C	
A	Catalog Number	C	Amperage	B	Finish
IS125	Single Circuit End Feed	-1A	120W/1A	B	Black
IS126	Single Circuit In-Line Feed	-2A	240W/2A	SV	Silver
IS135	Single Circuit Mini End Feed	-3A	360W/3A	W	White
		-5A	600W/5A		
		-7A	840W/7A		
		-8A	960W/8A		
		-10A	1200W/10A		
		-12A	1440W/12A		

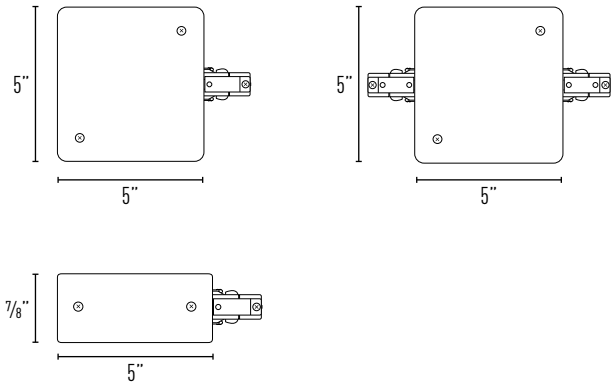

DESCRIPTION

Current limiters are intended to be installed at every track feed location in place of a standard non-limiting feed. These feeds incorporate a circuit breaker which are designed to limit available wattage to the track. Without a current limiter lighting loads are being calculated by the overall length of the track multiplied by 45W.

FEATURES

- Available in in-line or end feed
- Up to (8) different amperages
- Three different finishes
- Self luminous ON/OFF breaker switch
- Plastic polycarbonate cover

MINI END FEED

- 1 7/8" width x 5" length x 1 1/4" height, with breaker on back

END FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side

IN-LINE FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side

ELECTRICAL

- 120V/60Hz capacity
- All wiring should meet National and local electrical codes
- Use 12 gauge, 90°C minimum supply wire

LISTING

- ETL Listed to US and Canadian standards for dry locations

