

MXG2DSTR

3.5" MX G2 LED Warm Dim Square Lensed Pinhole - Wet Location

ELECTRICAL DATA

LED Light Engine	System Wattage *	CCT / CRI	Delivered Lumens **
WD1	13.5W	3000K-1800K / 92 CRI	750lm
WD2	16.5W	3000K-1800K / 92 CRI	900lm

* System Wattage includes driver and LED Module consumption.

** Delivered lumens will vary depending on trim, CCT, CRI, optic and ceiling thickness

FEATURES

- Halogen style profile that warms as it dims
- 3000K at full intensity to 1800K at lowest dim level
- Multiple architectural trim options available
- Field changeable optics: 24°, 30°, 45°

LED LIGHT ENGINE

- 3000K to 1800K programmable tuning at 92 CRI
- 50,000 hours L70 (rated life at 70% output)

ELECTRICAL SYSTEM

- Multiple dimming drivers available
- 120V or 277V input; Power factor >.9, 50/60Hz
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

DIMMING

- Forward/reverse phase dimming 1% (120V only)
- 0-10V Dimming 1%
- EldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- Lutron® LTEA2W Hi-Lume 1% 2-wire LED driver (120V forward phase only)
- DMX512 RDM 0.1%

HOUSING

- Heavy duty black powder coated 18 gauge steel frame
- Standard housing accommodates 5/8" ceiling thickness
- Extended collar options available for ceilings up to 1" or 2" thick, must specify either EC1 or EC2

TRIM SPECIFICATION

- High quality A380 aluminum die-cast trims
- Discrete self flange or painted white flange options
- Trim is available with solite, clear tempered or frosted lens, must specify.

INSTALLATION

- Housing types include Non-IC and IC Air-Tight must specify
- Non-IC rated housings must be kept at a minimum of 3" away from insulation
- Butterfly brackets are compatible with C-channel, adjustable bar hangers (14"-25") and EMT
- C-channel is recommended for T-bar ceilings
- Bar hangers must be ordered separately
- Max. ambient temperature: 131°F (55°C)

EMERGENCY BACKUP


- Remote test switch included
- External battery operates LED load at a minimum of 500lm to 850lm for 90 minutes, depending on backup wattage selected
- Servicing requires above ceiling access

LISTING / WARRANTY



- 5-Year Intense LED Limited Warranty
- ETL listed to US and Canadian standards for wet locations
- (-IC Only) Air-Tight Certified ASTM E283
- (-IC Only) ETL listed for direct contact w/insulation
- Can be used to comply with Title 24, Part 6, JA8 high efficacy LED light source requirements 4





JOB NAME	CATALOG NUMBER
NOTES	TYPE




MXTG2-STRD308
(1 1/2" Regress with Lens)




MXTG2-STRR308
(1/2" Regress with Lens)



MXTG2-SFRR308
(1/2" Flat Mount with Lens)



Available Trim Finishes

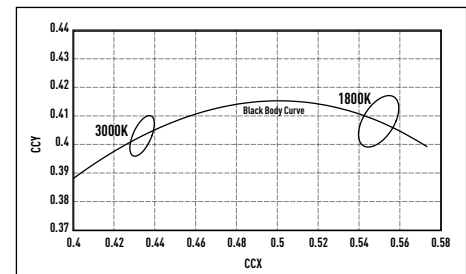

Housing Part Number (Example: MXG2DSTR-NCW1DIM)

Housing	Installation Type	Ceiling Thickness	Wattage	Dimming	Voltage	Options
MXG2DSTR	-NC (Non-IC)	blank (5/8")	WD1 (13.5W)	DIM ¹ (Phase Dimming)	blank (-NC: 120V Only -IC: UNV 120V-277V) 27 (277V For -NC Only)	I100 (C-Channel Bar Hangers) I200 (Flat Bar Hangers) I400 (Wood Joist Bar Hangers) EM7 ³ (7W Emergency Backup IOTA Part #ILB-CP07-A) EM12 ³ (12W Emergency Backup IOTA Part #ILB-CP12-A)
	-IC (Air-Tight IC)	EC1 (1") EC2 (2")	WD2 (16.5W)	D101 (0-10V Dimming 1%) ED10V1 (eldoLED 0-10V 1%) ED10V01 (eldoLED 0-10V 0.1%) LUT (Lutron® LDE1 EcoSystem 1%) LUT2 ¹ (Lutron® LTEA2W 2-Wire 1%) DMXR ² (DMX512 RDM 0.1%)		

Trim Part Number (Example: MXTG2-STRD308WWD1NF-SL)

Trim	Finish	Wattage	Optic	Lens
MXTG2-STRD308 (1 1/2" Regress)	B (Black)	WD1 (13.5W)	NF (24° Narrow Flood)	-SL ⁴ (Solite)
	W (White)	WD2 (16.5W)	FL (30° Flood)	-CR (Clear Tempered)
MXTG2-STRR308 (1/2" Regress)	SN (Satin Nickel)		WF (45° Wide Flood)	-FR ⁴ (Frosted)
MXTG2-SFRR308 (1/2" Flat Mount)	AB (Antique Bronze)			
	WH (Wheat)			

Notes:


- Available in 120V only
- Not available with WD1
- Access above ceiling required
- Solite and frosted lens can not be used to comply with Title 24, Part 6, JA8 high efficacy LED light source requirements. Clear lens only.

MXG2DSTR

3.5" MX G2 LED Warm Dim Square Lensed Pinhole - Wet Location

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

NON-IC & AIR TIGHT IC DIMENSIONS

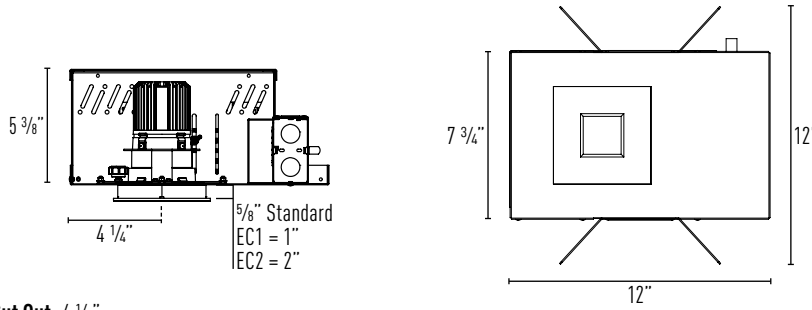

Plaster Frame Accommodation

Collar Type	Standard	EC1	EC2
Max Ceiling Thickness	Up-to 5/8"	Up-to 1"	Up-to 2"


Ceiling Cut Out: 4 1/8"

OPTICS REPLACEMENT

1. Rotate release cap by turning counter clockwise.
2. Install accessories into accessory holder and replace accessory holder's retaining clip.
3. Place accessory holder and accessory flush against optic and replace release cap.

Optics

- IP-OP4724 (24° Narrow Flood)
- IP-OP4736 (30° Flood)
- IP-OP4750 (45° Wide Flood)

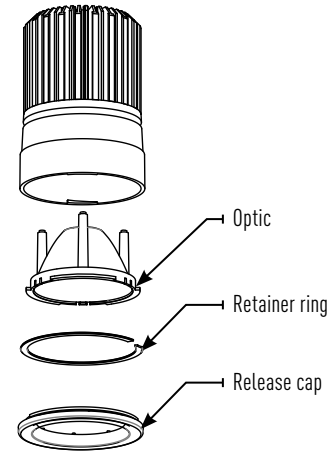

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXTG2-STRD308WWD1-CR

REPORT #:


ILL20181001-12.001 (24)
ILL20180917-20.001 (30)
ILL20180919-28.001 (45)

TRIM MULTIPLIERS:


MXTG2-STRD308 (x 1.00)
MXTG2-STRR308 (x 1.00)

LENS MULTIPLIERS:


Solite (x 0.92)
Clear (x 1.00)
Frosted (x 0.92)

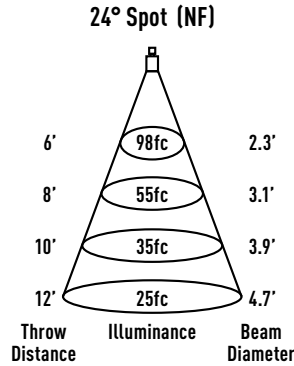

Watts: 13.5
Lumens: 568
LPW: 42
CCT: 3000K

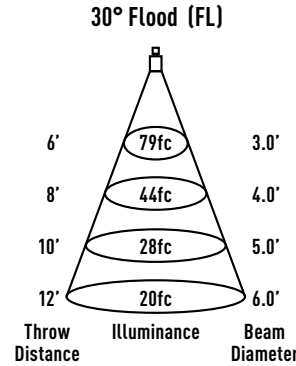

Watts: 13.5
Lumens: 765
LPW: 57
CCT: 3000K

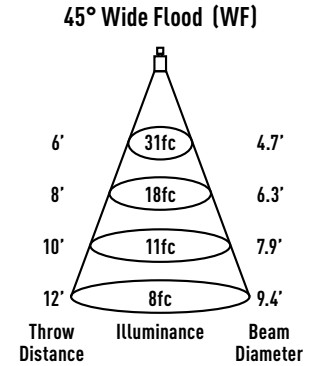

Watts: 13.5
Lumens: 625
LPW: 46
CCT: 3000K

Intensity	
Degree	Candela
0°	3532
5°	3068
15°	779
25°	45
35°	7
45°	3

Intensity	
Degree	Candela
0°	2833
5°	2649
15°	1283
25°	261
35°	34
45°	3

Intensity	
Degree	Candela
0°	1127
5°	1103
15°	876
25°	403
35°	102
45°	5

MXTG2-STRD308WD2-CR

REPORT #:


ILL20181001-12.002 (24)
ILL20180917-20.002 (30)
ILL20180919-28.002 (45)

TRIM MULTIPLIERS:


MXTG2-STRD308 (x 1.00)
MXTG2-STRR308 (x 1.00)

LENS MULTIPLIERS:


Solite (x 0.92)
Clear (x 1.00)
Frosted (x 0.92)

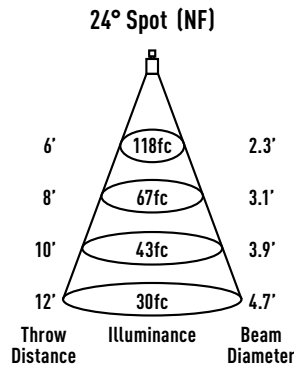

Watts: 16.4
Lumens: 684
LPW: 42
CCT: 3000K

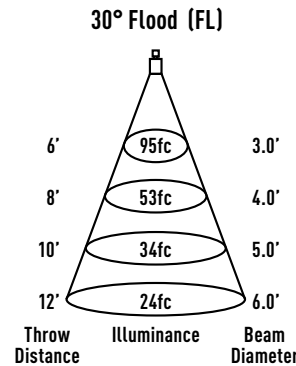

Watts: 16.4
Lumens: 921
LPW: 56
CCT: 3000K

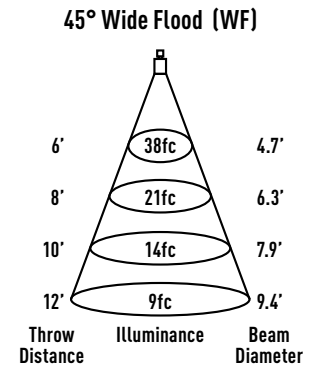

Watts: 16.4
Lumens: 753
LPW: 46
CCT: 3000K

Intensity	
Degree	Candela
0°	4255
5°	3697
15°	939
25°	55
35°	8
45°	4

Intensity	
Degree	Candela
0°	3413
5°	3191
15°	1546
25°	314
35°	41
45°	4

Intensity	
Degree	Candela
0°	1358
5°	1329
15°	1055
25°	485
35°	123
45°	6