




High Performance Cylinders

A Complete Guide To
Intense Cylinder &
Pendant Lighting

MX

High Performance
Pendants

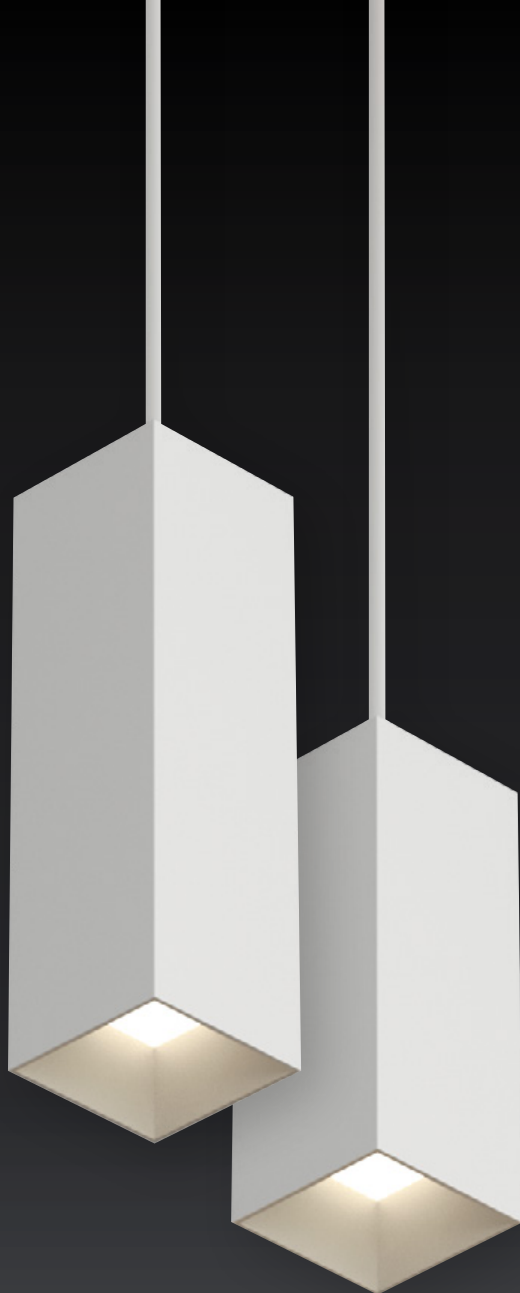

Compatible With

Downlight
Trims

High Performance

TIR
Optics

Architectural

Deep
Dimming

MX 3.5" Aperture Architectural Pendants

Built on the powerful MX platform, these pendants provide elegant, architectural illumination and discreetly complement any space. Modular ingenuity transforms the expansive options and performance of the award-winning MX downlight into round and square pendants.

Top Features

- Seamless design with no visible lines or hardware
- Field changeable optics, drivers and LED engines
- Unique flush surface mount with quarter turn adjustment for precise alignment

Dimming Options

- Forward / Reverse Phase
- 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1%
- DMX512 RDM at 0.1%

Mounting Types

- Cable: 24", 48" & 96" Cable Lengths
- Pendant: 12", 18", 24", 36" & 48" Lengths
- Surface Mount

Electrical Data (Based on Round Aperture)

L0		900lm / 10W	90 lm/W
L1		1300lm / 16W	82 lm/W
L2		1525lm / 20W	76 lm/W

Aperture Types



Round



Square

Height Options



9-Inch



12-Inch

Mounting Options



Surface



Pendant



Cable

Pendant Finishes



White



Black

Trim Finishes



White



Black



Satin Nickel



Antique Bronze

Field Changeable Optics

12°
Spot24°
Narrow Flood36°
Flood50°
Wide Flood

Color Reliability

2 Step
Binning82 CRI
2700K to
4100K92 CRI
2700K to
4100K**MXG2PRD1**
9-Inch Pendant**MXG2PRD2**
12-Inch Pendant**MXG2PSD1**
9-Inch Square
Pendant**MXG2PSD2**
12-Inch Square
Pendant

Gravity™

High Power
Architectural
Cylinders



Delivering Up To

1500
Lumens

High Performance

TIR / Wall
Wash Optics

Architectural

Deep
Dimming

Gravity 2-Inch Architectural Cylinder

Designed to complement the new Gravity 2-inch downlight, the Gravity 2-inch cylinder provides architectural illumination in a sleek, elegant housing. Offering high performance and tight beam control in a compact design. Gravity 2-inch cylinders enhance any space.

Sleek Architectural Design

Beautifully constructed 6 & 12-inch extruded aluminum cylinder with specification grade trim in elegant finishes

Consistent Family Performance

Utilizes the same trimless trims as the Gravity 2-inch downlight


Field Changeable Optics & Accessories

Dedicated High performance 7° Narrow Spot and interchangeable TIR optics ranging from 16° to 60°


Electrical Data

L0		500lm / 7W	71 lm/W
L1		850lm / 10W	85 lm/W
L2		1200lm / 16W	75 lm/W
L3		1500lm / 20W	75 lm/W

Height Option



Mounting Options

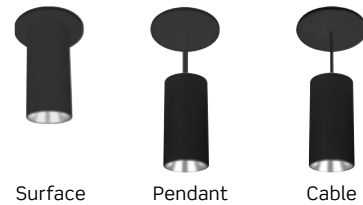


Cylinder Finishes



Trim Finishes



Field Changeable Optics

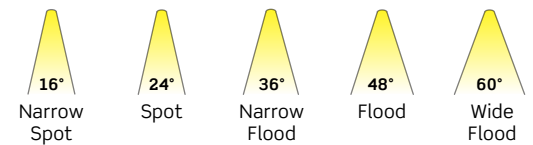


Color Reliability

2 SDCM	3 SDCM	82 CRI	92 CRI
2 Step Binning 4-Inch	3 Step Binning 6 & 8-Inch	82 CRI 2700K to 4000K	92 CRI 2700K or 3000K



Gravity™

High Power
Architectural
Cylinders

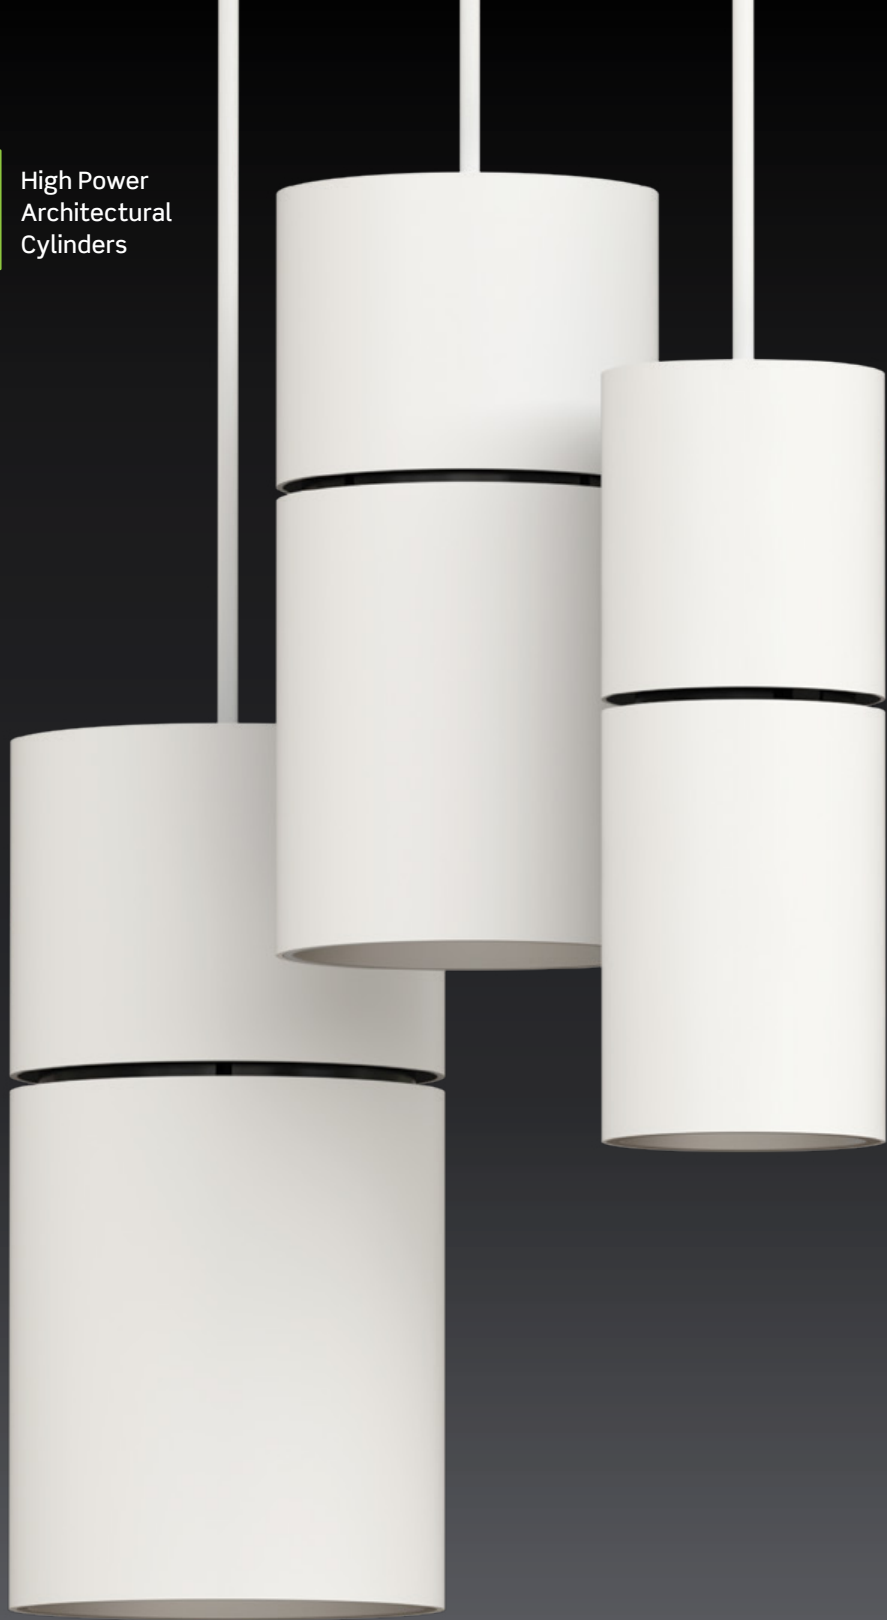

Delivering Up To

7000
Lumens

High Performance

TIR
Optics

Architectural

Deep
Dimming

Gravity High Power Architectural Cylinders

Gravity cylinders are beautifully designed high performance LED downlights that offer a dynamic solution for high output illumination. Designed for use in a variety of architectural applications, Gravity cylinders provide uniform light distribution in a variety of environments from 10' corridors to 100' ceilings.

Top Features

- High output single point source LED
- Field changeable optics, drivers and LED engines
- Tunable White and Warm Dim options available

Dimming Options

- 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1% or 5%
- eldoLED DALI at 0.1% or 1%
- DMX512 RDM at 0.1%

Mounting Types


- Aircraft Cable: 144" Cable Length
- Pendant: 12", 18", 24", 36", 48" & 96" Lengths
- Wall Mount (4-Inch Cylinders Only)
- Surface Mount




Electrical Data (Based on 6" Aperture)

L1	1000lm / 9W	111 lm/W
L2	1500lm / 11W	136 lm/W
L3	2000lm / 13W	154 lm/W
L4	2500lm / 17W	147 lm/W
L5	3000lm / 22W	136 lm/W
L6	3500lm / 28W	125 lm/W
L7	4000lm / 34W	118 lm/W
L8	4500lm / 41W	109 lm/W
L9	5000lm / 47W	106 lm/W
L10	6000lm / 49W	122 lm/W
L11	7000lm / 58W	121 lm/W

Aperture Sizes

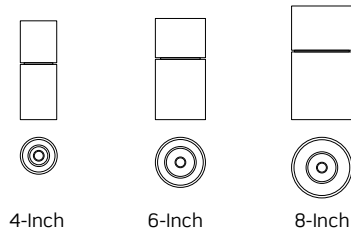

Mounting Options

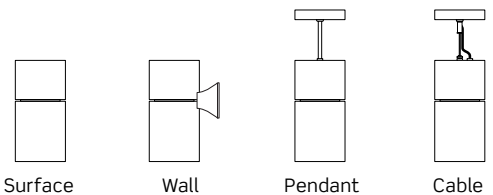


Cylinder Finishes



Trim Finishes



Field Changeable Optics

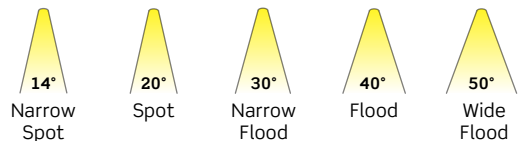

Color Reliability

2 SDCM	3 SDCM	82 CRI	92 CRI
2 Step Binning 4-Inch	3 Step Binning 6 & 8-Inch	82 CRI 2700K to 4000K	92 CRI 2700K or 3000K

SS

General Illumination
Cylinders



Delivering Up To

3000
Lumens

Efficacy Up To

96 Lumens
Per Watt

Standard

1% 0-10V
Dimming

SS General Illumination Cylinders

Designed on the popular SS downlighting series, SS cylinders set a new standard for efficiency and performance. Engineered for a variety of commercial environments, these cylinders provide unparalleled value for general illumination.

Top Features

- High efficacy of up to 96 lm/W
- Deep regressed LED provides comfortable illumination
- Tunable White and Warm Dim options available

Dimming Options

- Standard 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1% or 5%
- eldoLED DALI at 0.1% or 1%
- DMX512 RDM at 0.1%


Mounting Types

- Aircraft Cable: 144" Cable Length
- Pendant: 12", 18", 24", 36", 48" & 96" Lengths
- Wall Mount
- Surface Mount


Electrical Data (Based on 6" Aperture)

L1		1000lm / 13W	77 lm/W
L2		1500lm / 16W	94 lm/W
L3		2000lm / 21W	95 lm/W
L4		2500lm / 26W	96 lm/W
L5		3000lm / 32W	94 lm/W


Aperture Sizes

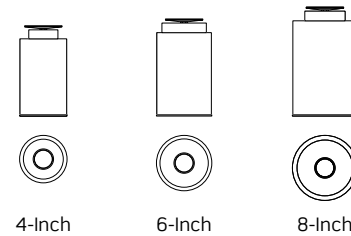

Mounting Options

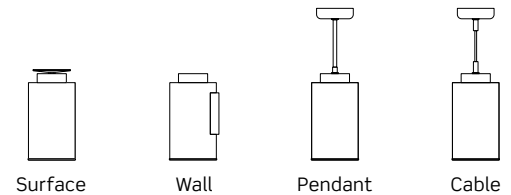


Cylinder Finishes



Trim Finishes



Color Reliability



Intense Lighting

725 Landwehr Road
Northbrook, IL 60062

tel 714 630-9877

fax 847 559-5505

info@intenselighting.com
www.intenselighting.com

A Leviton Company

www.leviton.com