

MXG2PRD

3.5" MX G2 LED Warm Dim Downlight Cylinder

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA

LED Light Engine	System Wattage *	CCT / CRI	Delivered Lumens **
WD1	13.5W	3000K-1800K / 92 CRI	900lm
WD2	16.5W	3000K-1800K / 92 CRI	1150lm

* System Wattage includes driver and LED Module consumption.

** Delivered lumens will vary depending on trim, CCT, CRI, optic and ceiling thickness

FEATURES

- Halogen style profile that warms as it dims
- 3000K at full intensity to 1800K at lowest dim level
- Field changeable optics: 24°, 30°, 45°
- Sleek, high performance pendant complements MX downlighting family
- Offered in various mounting options including cable, stem and surface
- Utilizes MX trims to ensure aesthetic consistency across the product line
- Control protocols from Phase, 0-10V, Lutron and DMX with options available in 0.1%
- Unique flush, surface mount design allows for precise alignment and adjustment

LED LIGHT ENGINE

- >50,000 hours L70 (rated life at 70% output)

ELECTRICAL SYSTEM

- 120/277V 50/60Hz input
- Class 2 power supply
- Over voltage/current and short circuit protection with auto recovery

DIMMING

- Forward/reverse phase dimming 1% (120V only)
- 0-10V Dimming 1%
- eldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- Lutron® LTEA2W Hi-Lume 1% 2-wire LED driver (120V forward phase only)
- DMX512 RDM 0.1%

MOUNTING

- Mounts to 4" octagon J-Box with raised fixture cover (supplied by others)
- 9-inch model requires remote driver box
- 0-10V and Lutron options requires remote driver box for cable mount option
- DMXR option requires remote driver box for cable and pendant mount options
- Pendant stems supplied with complete canopy assembly
- Cable / pendant mount are matched to housing finish

TRIM SPECIFICATION

- A380 aluminum die-cast trims
- Durable powder coat available in multiple finishes

REMOTE BOX

- Remote box included when required by specification
- Galvanized steel construction
- Separate line voltage and low voltage wiring compartments
- 50ft remote distance maximum

ACCESSORIES

Luminaire will accommodate (2) accessories, accessory holder required. Accessory holder not compatible with lensed trims

LISTING / WARRANTY


- ETL Listed to US and Canadian standards for damp locations
- ETL Listed to US and Canadian standards for wet locations. Available with lensed surface mount options only.
- 5-Year Intense LED Limited Warranty




MX



Pendant Size Options



Mounting Options



(See Page 2 For Dimensions)

Available Trim Finishes



Cylinder Part Number (Example: MXG2PRD2WD1DIMNFWBR12)

Cylinder	Height	Wattage	Dimming (120-277V)	Optic	Housing Finish
MXG2PRD	1 (9")	WD1 (13.5W)	DIM ¹ (Phase Dimming)	NF (24° Narrow Flood)	B (Black)
	2 (12")	WD2 (16.5W)	D101 ² (0-10V Dimming 1%)	FL (30° Flood)	W (White)
	3 ⁵ (15")		ED10V1 ² (eldoLED 0-10V 1%) ED10V01 ² (eldoLED 0-10V 0.1%) LUT ³ (Lutron® LDE1 EcoSystem 1%) LUT2 ^{1,3} (Lutron® LTEA2W 2-Wire 1%) DMXR ^{2,3} (DMX512 RDM .01%)	WF (45° Wide Flood)	SV (Silver)

Trim Finish	Lens	Mounting
B (Black)	blank (None)	C48 ² (48" Cable)
W (White)	SL ⁴ (Solite)	C96 ² (96" Cable)
SN (Satin Nickel)	CR ⁴ (Clear)	R12 (12" Rigid Pendant)
AB (Antique Bronze)	FR ⁴ (Frosted)	R18 (18" Rigid Pendant)
WH (Wheat)		R24 (24" Rigid Pendant)
		R36 (36" Rigid Pendant)
		R48 (48" Rigid Pendant)
		S ⁶ (Surface)

Notes:

- Not Available in 277V
- 0-10V and Lutron options require remote driver box for cable mount option
- Not available with WD1
- Accessories holder not compatible with lensed trims
- Special order, consult factory for lead times
- A lens option must be selected for wet location applications. Surface mount can be used in wet locations, see instruction sheet for proper installation instructions.

Accessories⁴

- LH47 (Accessory Holder, Black)
- LH47W (Accessory Holder, White)
- PFLMB-47 (Hex Louver, Black)
- PFL1-47 (Prismatic Spread Lens)
- PFL2-47 (Linear Spread Lens)
- PFL4-47 (Solite Lens)

MX PENDANT L/M-0430-21 P-1

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to www.intenselighting.com. For a printed copy of the warranty, you may call 800 961-5321.


© 2022 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.

MXG2PRD


3.5" MX G2 LED Warm Dim Downlight Cylinder

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


Surface Mount

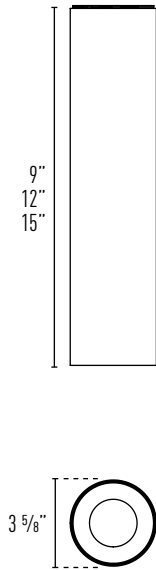


Rigid Pendant Mount

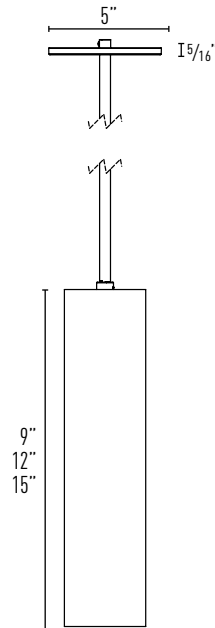

Cable Mount

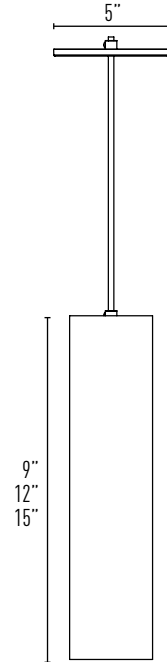

Remote Mounted Driver Options

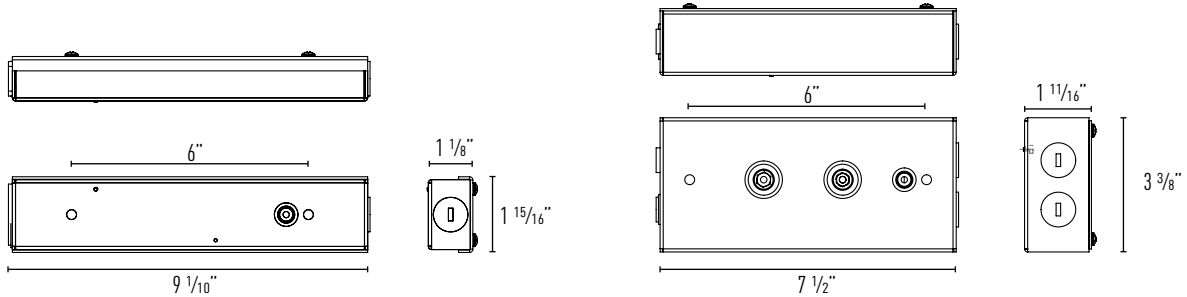

Remote Driver Box For

9-inch Non-Dimming
Phase Dimming
0-10V Dimming 1%

12 & 15-inch 0-10V Dimming 1% (Cable)

Note: Wires for class 2 LED driver require a minimum of 18 AWG wire at a maximum of 50 feet length per local and national electrical regulations.

Remote Driver Box For

9-inch eldoLED 0-10V 1%
eldoLED 0-10V 0.1%
Lutron Hi-Lume® 1%
Lutron EcoSystem® 1%
DMX512 RDM 0.1%

12 & 15-inch Lutron Hi-Lume® 1% (Cable)
Lutron EcoSystem® 1% (Cable)
DMX512 (Cable and Rigid Pendant)


Note: Wires for class 2 LED driver require a minimum of 18 AWG wire at a maximum of 50 feet length per local and national electrical regulations.

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


MXG2PRD (WD1)

REPORT #:
 ILL20180913-10.001 (24)
 ILL20180917-1.001 (30)
 ILL20180919-1.001 (45)


TRIM MULTIPLIERS:
 MXTG2-RTRD300 (x 1.00)
 MXTG2-RTRR300 (x 0.90)

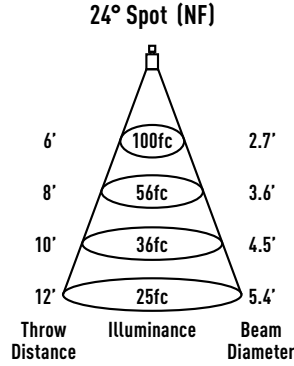

Watts: 13.5
Lumens: 846
LPW: 63
CCT: 3000K

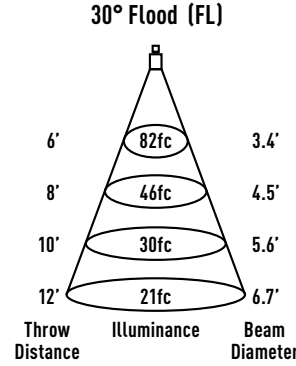

Watts: 13.5
Lumens: 959
LPW: 71
CCT: 3000K

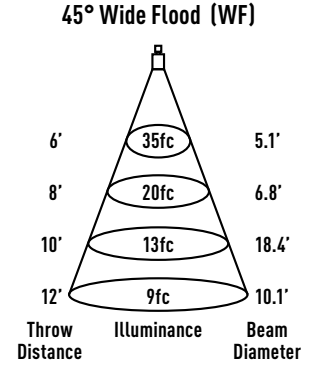

Watts: 13.5
Lumens: 824
LPW: 61
CCT: 3000K

Intensity	
Degree	Candela
0°	3586
5°	3212
15°	1360
25°	316
35°	27
45°	6


Intensity	
Degree	Candela
0°	2964
5°	2826
15°	1582
25°	444
35°	64
45°	9

Intensity	
Degree	Candela
0°	1268
5°	1240
15°	988
25°	540
35°	204
45°	53


MXG2PRD (WD2)

REPORT #:
 ILL20180913-10.002 (24)
 ILL20180917-1.002 (30)
 ILL20180919-1.002 (45)


TRIM MULTIPLIERS:
 MXTG2-RTRD300 (x 1.00)
 MXTG2-RTRR300 (x 0.90)

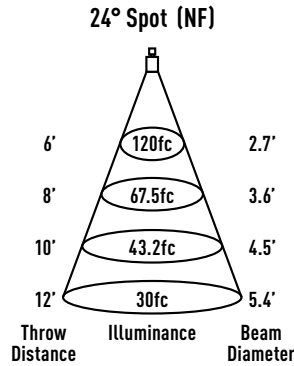

Watts: 16.4
Lumens: 1021
LPW: 62
CCT: 3000K

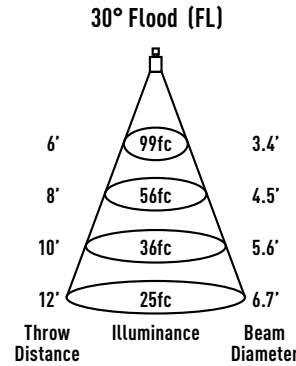

Watts: 16.4
Lumens: 1155
LPW: 70
CCT: 3000K

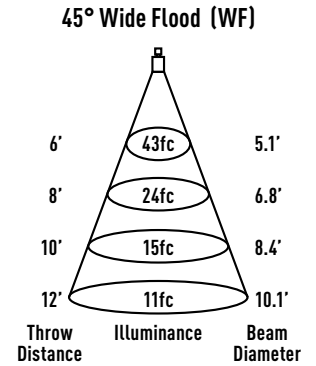

Watts: 16.4
Lumens: 993
LPW: 61
CCT: 3000K

Intensity	
Degree	Candela
0°	4320
5°	3870
15°	1639
25°	380
35°	33
45°	8

Intensity	
Degree	Candela
0°	3571
5°	3405
15°	1906
25°	535
35°	77
45°	11

Intensity	
Degree	Candela
0°	1529
5°	1495
15°	1191
25°	651
35°	246
45°	64