

MXRG2ASTR

3.5" MX G2 LED Square Lensed Pinhole with Remodel Housing - Wet Location

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA

LED Light Engine	System Wattage *	CCT / CRI	Delivered Lumens **	Lumens Per Watt
L0	10W	3000K / 82 CRI	650lm	65
L1	16W	3000K / 82 CRI	950lm	59
L2	20W	3000K / 82 CRI	1100lm	55
L3	26W	3000K / 82 CRI	1350lm	52

*System Wattage include driver and LED Module consumption. **Delivered lumens will vary depending on trim, CCT, CRI, optic and ceiling thickness

FEATURES

- Multiple architectural trim options
- High center beam spot up to 21,000 CBCP
- Dedicated 9° with field changeable 12°, 24°, 36° & 50° optics

LED LIGHT ENGINE

- 92 CRI & 82 CRI in 2700K, 3000K, 3500K or 4100K with 2SDCM binning
- >50,000 hours L70 (rated life at 70% output)

ELECTRICAL SYSTEM

- (Non-IC) Dedicated voltage options of 120V or 277V. Must be specified in catalog code.
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

DIMMING

- 0-10V Dimming 1%
- Forward/reverse dimming 1% (120V only)
- EldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- DMX512 RDM 0.1%

HOUSING

High quality die-casted collar with high strength stainless steel swing out lugs. Driver swivels 90° to accommodate tight spaces.

TRIM SPECIFICATION


Aiming with locking 35° vertical and 90° turns (90, 180, 270 and 360). High quality trims are die-cast using A380 aluminum with durable powder coat available in multiple finishes, black interior standard. Trim is available with solite, clear tempered or frosted lens, must specify.

INSTALLATION


Housing installs from below the ceiling. Swing out lugs allow for installation in ceilings between 5/16" and 3/4". Max. ambient temperature: 95°F (35°C). Housing is Non-IC rated, must be kept at a minimum of 3" away from insulation.

LISTING / WARRANTY

- 5-Year Intense LED Limited Warranty
- ETL listed to US and Canadian standards for wet locations



MXTG2-SFRR308
(1/2" Flat Mount with Lens)



Housing dimensions are on Page 2

Available Trim Finishes



Housing Part Number (Example: MXRG2ASTR-NCL1)

Housing	Installation Type	Ceiling Thickness	Wattage	Dimming	Voltage
MXRG2ASTR	-NC (Non-IC)	blank (5/8")	L0 (10W)	blank (Non-Dimming)	blank (Non-IC: 120V -IC/-CP: 120V/277V) 27 (277V Non-IC Only, for -IC/-CP housing options use blank)
		EC1 ³ (1")	L1 (16W)	DELV ¹ (Phase Dimming)	
		EC2 ³ (2")	L2 (20W)	D101 (0-10V Dimming 1%)	
			L3 (26W)	ED10V1 ² (eldoLED 0-10V 1%) ED10V01 ² (eldoLED 0-10V 0.1%) LUT ³ (Lutron® LDE1 EcoSystem 1%) DMXR ⁴ (DMX512 RDM 0.1%)	

Trim Part Number (Example: MXTG2-SFRR308WL13024-SL)

Trim	Finish	Wattage	CCT / CRI	Optic	Lens
MXTG2-SFRR308 (1/2" Flat Mount)	W (White)	L0 (10W)	27 (2700K / 82 CRI)	09 ⁵ (9° Narrow Spot)	-SL (Solite)
	B (Black)	L1 (16W)	279 (2700K / 92 CRI)	12 (12° Spot)	-CR (Clear Tempered)
		L2 (20W)	30 (3000K / 82 CRI)	24 (24° Narrow Flood)	-FR (Frosted)
	AB (Antique Bronze)	L3 (26W)	309 (3000K / 92 CRI)	36 (36° Flood)	
		35 (3500K / 82 CRI)	35 (3500K / 92 CRI)	50 (50° Wide Flood)	
		359 (3500K / 92 CRI)			
		41 (4100K / 82 CRI)			
		419 (4100K / 92 CRI)			

Notes:

- Available in 120V only
- Not Available in L3
- Not Available in L2 & L3
- DMX512 RDM not available in L0 & L1
- 9° NS available in 279 with L0 or L1 Only

MX ADJUSTABLE REMODEL L/M-109-23 P-43

INTENSE LIGHTING | 725 Landwehr Road, Northbrook, IL 60062 | tel 714 630-9877 | fax 847 559-5505

For Intense Lighting's limited product warranty, go to www.intenselighting.com. For a printed copy of the warranty, you may call 800 961-5321.


© 2023 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.

MXRG2ASTR

3.5" MX G2 LED Square Lensed Pinhole with Remodel Housing - Wet Location

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

DRIVER: Non-Dimming / DELV / D10

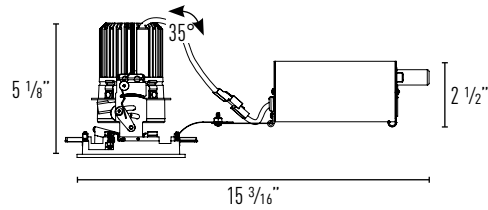


Ceiling Cut Out: 4 1/8"
 Minimum Ceiling Thickness: 5/16"
 Maximum Ceiling Thickness: 3/4"

Fixture Aiming - Horizontal Adjustment

1" Regress Trims	90° turns	90° turns	Full 360°
1/2" Regress Trims	Full 360°	Full 360°	Full 360°

DRIVER: eldoLED / Lutron / DMX

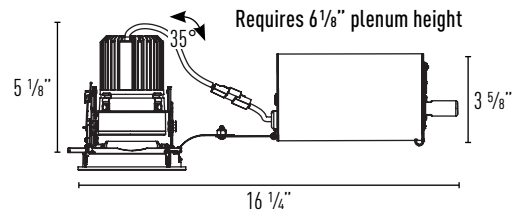

Ceiling Cut Out: 4 1/8"
 Minimum Ceiling Thickness: 5/16"
 Maximum Ceiling Thickness: 3/4"

Fixture Aiming - Horizontal Adjustment


1" Regress Trims	90° turns	90° turns	Full 360°
1/2" Regress Trims	Full 360°	Full 360°	Full 360°

OPTICS REPLACEMENT

1. Rotate release cap by turning counter clockwise.
2. Install accessories into accessory holder and replace accessory holder's retaining clip.
3. Place accessory holder and accessory flush against optic and replace release cap.

Optics

- IP-OP4712 (12° Spot)
- IP-OP4724 (24° Narrow Flood)
- IP-OP4736 (36° Flood)
- IP-OP4750 (50° Wide Flood)

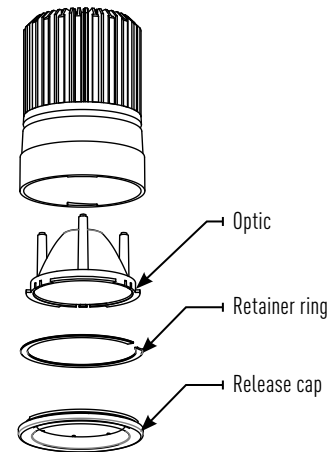

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXTG2-STRR308WLO-CR

Report #:
 ILL-02122016-11.3 (12)
 ILL-02122016-10.3 (24)
 ILL-02162016-02.3 (36)
 ILL-02122016-06.3 (50)

MXTG2-STRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)


MXTG2-SFRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)



Watts: 10
 Lumens: 564
 LPW: 56
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	10568
5°	6143
15°	454
25°	42
35°	9
45°	2



Watts: 10
 Lumens: 694
 LPW: 69
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	5432
5°	4684
15°	971
25°	47
35°	4
45°	1



Watts: 10
 Lumens: 668
 LPW: 67
 CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	1993
5°	1959
15°	1293
25°	369
35°	53
45°	1



Watts: 10
 Lumens: 560
 LPW: 56
 CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	761
5°	761
15°	702
25°	371
35°	99
45°	4

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

W Beam width
L Beam length
C Distance to center of beam
D Distance
FC Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXTG2-STRR308WLO-CR 3000K 12° Spot	6'	294	1.4	1.1	6'	4	167	1.93	1.28	3'	4	307	1.06	2.13
	8'	165	1.8	1.4	8'	5	94.2	1.59	2.61	4'	6	167	1.28	2.94
	10'	106	2.3	1.8	10'	7	58.1	3.37	2.19	5'	7	114	1.48	3.42
	12'	73.4	2.8	2.1	12'	8	41.7	3.87	2.62	6'	8	76.7	1.84	4.19
MXTG2-STRR308WLO-CR 3000K 24° Narrow Flood	6'	151	2.2	1.9	6'	4	85.3	3.07	2.34	3'	4	170	1.49	2.95
	8'	84.9	2.9	2.6	8'	5	48.6	4.01	2.99	4'	5	95.5	2.08	3.88
	10'	54.3	3.7	3.2	10'	6	30.7	5.04	3.76	5'	7	59.7	2.76	4.9
	12'	37.7	4.4	3.9	12'	8	21.3	6.05	4.57	6'	8	42.5	3.17	5.73
MXTG2-STRR308WLO-CR 3000K 36° Flood	6'	55.4	3.9	3.2	6'	3	36.8	4.44	3.13	3'	3	69.6	2.33	4
	8'	31.1	5.2	4.2	8'	4	20.7	5.89	4.27	4'	4	39.1	3.04	5.44
	10'	19.9	6.5	5.3	10'	5	13.3	7.38	5.35	5'	5	25.1	3.77	6.77
	12'	13.8	7.8	6.3	12'	6	9.2	8.81	6.45	6'	7	17.4	4.57	8.09
MXTG2-STRR308WLO-CR 3000K 50° Wide Flood	6'	21.1	5.6	5.1	6'	2	18.1	4.6	4.89	3'	3	29.7	3.6	4.69
	8'	11.9	7.4	6.9	8'	3	10.2	6.13	6.49	4'	4	16.7	4.88	6.2
	10'	7.6	9.3	8.6	10'	4	6.4	7.76	8.11	5'	5	10.7	6.16	7.74
	12'	5.3	11.2	10.3	12'	4	4.5	9.27	9.67	6'	6	7.4	7.35	9.32

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXTG2-STRR308WL1-CR

Report #:
 ILL-02122016-11.2 (12)
 ILL-02122016-10.2 (24)
 ILL-02162016-02.2 (36)
 ILL-02122016-06.2 (50)

MXTG2-STRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)


MXTG2-SFRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)



Watts: 15.4
 Lumens: 790
 LPW: 51
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	14796
5°	8600
15°	636
25°	58
35°	13
45°	2



Watts: 15.4
 Lumens: 971
 LPW: 63
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	7605
5°	6557
15°	1360
25°	65
35°	6
45°	1



Watts: 15.4
 Lumens: 935
 LPW: 61
 CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	2790
5°	2743
15°	1811
25°	516
35°	74
45°	1



Watts: 15.4
 Lumens: 783
 LPW: 51
 CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	1066
5°	1066
15°	983
25°	520
35°	139
45°	5

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

W Beam width
L Beam length
C Distance to center of beam
D Distance
FC Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXTG2-STRR308WL1-CR 3000K 12° Spot	6'	411	1.4	1.1	6'	4	234	1.93	1.28	3'	4	429	1.06	2.13
	8'	231	1.8	1.4	8'	5	132	1.59	2.61	4'	6	234	1.28	2.94
	10'	148	2.3	1.8	10'	7	81.4	3.37	2.19	5'	7	160	1.48	3.42
	12'	103	2.8	2.1	12'	8	58.4	3.87	2.62	6'	8	107	1.84	4.19
MXTG2-STRR308WL1-CR 3000K 24° Narrow Flood	6'	211	2.2	1.9	6'	4	119	3.07	2.34	3'	4	238	1.49	2.95
	8'	119	2.9	2.6	8'	5	68.1	4.01	2.99	4'	5	134	2.08	3.88
	10'	76.1	3.7	3.2	10'	6	42.9	5.04	3.76	5'	7	83.6	2.76	4.9
	12'	52.8	4.4	3.9	12'	8	29.8	6.05	4.57	6'	8	59.5	3.17	5.73
MXTG2-STRR308WL1-CR 3000K 36° Flood	6'	77.5	3.9	3.2	6'	3	51.6	4.44	3.13	3'	3	97.4	2.33	4
	8'	43.6	5.2	4.2	8'	4	29	5.89	4.27	4'	4	54.8	3.04	5.44
	10'	27.9	6.5	5.3	10'	5	18.6	7.38	5.35	5'	5	35.1	3.77	6.77
	12'	19.4	7.8	6.3	12'	6	12.9	8.81	6.45	6'	7	24.4	4.57	8.09
MXTG2-STRR308WL1-CR 3000K 50° Wide Flood	6'	29.6	5.6	5.1	6'	2	25.4	4.6	4.89	3'	3	41.6	3.6	4.69
	8'	16.7	7.4	6.9	8'	3	14.3	6.13	6.49	4'	4	23.4	4.88	6.2
	10'	10.7	9.3	8.6	10'	4	9	7.76	8.11	5'	5	15	6.16	7.74
	12'	7.4	11.2	10.3	12'	4	6.3	9.27	9.67	6'	6	10.4	7.35	9.32

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXTG2-STRR308WL2-CR

Report #: ILL-02122016-11.1 (12)
 ILL-02122016-10.1 (24)
 ILL-02162016-02.1 (36)
 ILL-02122016-06.1 (50)

MXTG2-STRR308

Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)

MXTG2-SFRR308

Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)

CCT MULTIPLIERS:


	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

LENS MULTIPLIERS:

Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)

EMERGENCY MULTIPLIER:


7W Emergency	(x 0.40)
12W Emergency	(x 0.68)



Watts: 20.5
 Lumens: 925
 LPW: 45
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	17332
5°	10074
15°	745
25°	68
35°	15
45°	2



Watts: 20.4
 Lumens: 1138
 LPW: 56
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	8909
5°	7681
15°	1593
25°	76
35°	7
45°	1



Watts: 20.5
 Lumens: 1095
 LPW: 53
 CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	3268
5°	3214
15°	2121
25°	604
35°	87
45°	1



Watts: 20.5
 Lumens: 918
 LPW: 45
 CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	1248
5°	1249
15°	1151
25°	609
35°	163
45°	6

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

W Beam width
L Beam length
C Distance to center of beam
D Distance
FC Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXTG2-STRR308WL2-CR 3000K 12° Spot	6'	481	1.4	1.1	6'	4	274	1.93	1.28	3'	4	503	1.06	2.13
	8'	271	1.8	1.4	8'	5	155	1.59	2.61	4'	6	274	1.28	2.94
	10'	173	2.3	1.8	10'	7	95.3	3.37	2.19	5'	7	188	1.48	3.42
	12'	120	2.8	2.1	12'	8	68.4	3.87	2.62	6'	8	126	1.84	4.19
MXTG2-STRR308WL2-CR 3000K 24° Narrow Flood	6'	247	2.2	1.9	6'	4	140	3.07	2.34	3'	4	279	1.49	2.95
	8'	139	2.9	2.6	8'	5	79.7	4.01	2.99	4'	5	157	2.08	3.88
	10'	89.1	3.7	3.2	10'	6	50.3	5.04	3.76	5'	7	97.9	2.76	4.9
	12'	61.9	4.4	3.9	12'	8	35	6.05	4.57	6'	8	69.7	3.17	5.73
MXTG2-STRR308WL2-CR 3000K 36° Flood	6'	90.8	3.9	3.2	6'	3	60.4	4.44	3.13	3'	3	114	2.33	4
	8'	51.1	5.2	4.2	8'	4	34	5.89	4.27	4'	4	64.2	3.04	5.44
	10'	32.7	6.5	5.3	10'	5	21.7	7.38	5.35	5'	5	41.1	3.77	6.77
	12'	22.7	7.8	6.3	12'	6	15.1	8.81	6.45	6'	7	28.5	4.57	8.09
MXTG2-STRR308WL2-CR 3000K 50° Wide Flood	6'	34.7	5.6	5.1	6'	2	29.7	4.6	4.89	3'	3	48.8	3.6	4.69
	8'	19.5	7.4	6.9	8'	3	16.7	6.13	6.49	4'	4	27.4	4.88	6.2
	10'	12.5	9.3	8.6	10'	4	10.96	7.76	8.11	5'	5	17.6	6.16	7.74
	12'	8.7	11.2	10.3	12'	4	7.4	9.27	9.67	6'	6	12.2	7.35	9.32

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXTG2-STRR308WL3-CR

Report #: ILL-02122016-11 (12)
 ILL-02122016-10 (24)
 ILL-02162016-02 (36)
 ILL-02122016-06 (50)

MXTG2-STRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)


MXTG2-SFRR308
 Ceiling Thickness Multipliers:
 5/8" Thickness (x 1.00)
 1" Thickness (x 0.78)
 2" Thickness (x 0.56)

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)



Watts: 25.7
 Lumens: 1128
 LPW: 43
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	21137
5°	12285
15°	908
25°	83
35°	18
45°	3



Watts: 25.7
 Lumens: 1387
 LPW: 58
 CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	10865
5°	9367
15°	1943
25°	93
35°	8
45°	1



Watts: 26
 Lumens: 1336
 LPW: 53
 CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	3985
5°	3919
15°	2587
25°	737
35°	106
45°	2



Watts: 26.1
 Lumens: 1119
 LPW: 43
 CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	1523
5°	1523
15°	1404
25°	743
35°	199
45°	7

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXTG2-STRR308WL3-CR 3000K 12° Spot	6'	587	1.4	1.1	6'	4	334	1.93	1.28	3'	4	614	1.06	2.13
	8'	330	1.8	1.4	8'	5	188	1.59	2.61	4'	6	334	1.28	2.94
	10'	211	2.3	1.8	10'	7	116	3.37	2.19	5'	7	229	1.48	3.42
	12'	147	2.8	2.1	12'	8	83.4	3.87	2.62	6'	8	153	1.84	4.19
MXTG2-STRR308WL3-CR 3000K 24° Narrow Flood	6'	302	2.2	1.9	6'	4	171	3.07	2.34	3'	4	340	1.49	2.95
	8'	170	2.9	2.6	8'	5	97.2	4.01	2.99	4'	5	191	2.08	3.88
	10'	109	3.7	3.2	10'	6	61.3	5.04	3.76	5'	7	119	2.76	4.9
	12'	75.5	4.4	3.9	12'	8	42.6	6.05	4.57	6'	8	85	3.17	5.73
MXTG2-STRR308WL3-CR 3000K 36° Flood	6'	111	3.9	3.2	6'	3	73.6	4.44	3.13	3'	3	139	2.33	4
	8'	62.3	5.2	4.2	8'	4	41.4	5.89	4.27	4'	4	78.3	3.04	5.44
	10'	39.9	6.5	5.3	10'	5	26.5	7.38	5.35	5'	5	50.1	3.77	6.77
	12'	27.7	7.8	6.3	12'	6	18.4	8.81	6.45	6'	7	34.8	4.57	8.09
MXTG2-STRR308WL3-CR 3000K 50° Wide Flood	6'	42.3	5.6	5.1	6'	2	36.2	4.6	4.89	3'	3	59.5	3.6	4.69
	8'	23.8	7.4	6.9	8'	3	20.4	6.13	6.49	4'	4	33.5	4.88	6.2
	10'	15.2	9.3	8.6	10'	4	12.9	7.76	8.11	5'	5	21.4	6.16	7.74
	12'	10.6	11.2	10.3	12'	4	9.1	9.27	9.67	6'	6	14.9	7.35	9.32