

GC2DR

2" Gravity LED Downlight Cylinder

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA

LED Light Engine	Nominal Delivered Lumens*	System Wattage**
L1	850lm @ 3000K / 82 CRI	10 Watts
L2	1200lm @ 3000K / 82 CRI	16 Watts
L3	1500lm @ 3000K / 82 CRI	20 Watts

*System Wattage include driver and LED Module consumption. / **Delivered lumens will vary depending on CCT, CRI and optic selection

FEATURES

- Field changeable 16° to 60° Optics
- Integral field changeable accessory holder
- High performance cylinder extruded from aluminum in durable powder coat finishes

LED LIGHT ENGINE

- 10W, 16W & 20W
- 16° to 60° Optics: 2 SDCM, 82/92CRI in 2700K, 3000K, 3500K & 4000K
- Rated life of >50,000 hours L70 based on LED testing per LM-80-08 and projected values using IESNA TM21-11

OPTICS

- Field changeable 16° Spot, 24° Narrow Flood, 36° Flood, 48° Wide Flood and 60° Wide Flood
- Accepts (2) field changeable filter media

REFLECTOR

- Specification grade 1.0mm spun aluminum reflector
- Reflector available in White, Black or Haze finishes (consult factory for other finishes)

ELECTRICAL SYSTEM

- Universal 120-277V input; Power factor >.9, 50/60Hz
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

DIMMING

- Forward/reverse phase dimming 1% (120V only)
- 0-10V 1% Dimming 1%
- eldoLED SOL0drive 0-10V 0.1% (Remote)
- eldoLED ECOdrive 0-10V 1% (Remote)
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology (Remote) (Remote)
- DMX512 RDM 0.1% with RJ45 Interface (Remote)

REMOTE BOX

- Remote box included when required by specification
- Galvanized steel construction
- Above ceiling access required for servicing
- Separate line voltage and low voltage wiring compartments
- 50ft remote distance maximum

MOUNTING

- Fixtures mounts to recessed 3" or 4" octagon J-Box
- Cable mount option require remote driver box for 0-10V, eldoLED, Lutron® & DMXR dimming options)
- Cable / Pendant options are supplied with complete canopy assembly and color matched to housing finish
- Cable mount option are field adjustable
- Pendant mount option is not field cuttable.

LISTING / WARRANTY


- 5-Year Intense LED Limited Warranty
- ETL Listed to US and Canadian standards for damp locations
- ENERGY STAR® Qualified⁸
- Can be used to comply with 2016 Title 24, Part 6, JA8 high efficacy LED light source requirements⁹



Available Trim Finishes



Mounting Options



Cylinder Part Number (Example: GC2DR1L1279ED10V01N5SVWHT-HISSV)

Cylinder	Height	Wattage	CCT / CRI	Dimming	Optic	
GC2DR	1 (6in)	L1 (10W)	27 (2700K / 82 CRI)	DIM ¹ (Phase Dimming 1%)	SP (16° SP)	
			279 (2700K / 92 CRI)			
		L2 (16W)	30 (3000K / 82 CRI)	D101 ² (0-10V Dimming 1%)	NF (24° NFL)	
			309 (3000K / 92 CRI)			
		L3 ³ (20W)	35 (3500K / 82 CRI)	ED10V1 ³ (eldoLED 0-10V 1%)	FL (36° FL)	
			359 (3500K / 92 CRI)			
		40 (4000K / 82 CRI)	ED10V01 ³ (eldoLED 0-10V 0.1%)	WF (48° WFL)		
		409 (4000K / 92 CRI)				
					LUT ^{3,4} (Lutron® LDE1 EcoSystem 1%)	VF (60° VFL)
					DMXR ^{3,5} (DMX512 RDM 0.1%)	

Accessories

- PFL2-45 (Hex Louver)
- PFL4-45 (Soft Focus Film)
- PFL-LS-45 (Linear Spread)

Replacement Optics

Field changeable 16° to 60° optics

- IP-OP45SP (16° SP)
- IP-OP45NF (24° NFL)
- IP-OP45FL (36° FL)
- IP-OP45WF (48° WFL)
- IP-OP45VF (60° VFL)

Cylinder Finish	Reflector Finish	Lens	Mounting Type
W (White)	W (White)	blank (No Lens)	C48 ² (48" Cable)
B (Black)	B ⁶ (Black)	-SL (Solite)	C96 ² (96" Cable)
SV ⁶ (Silver)	HZ (Haze)		R12 (12" Rigid Pendant)
			R24 (24" Rigid Pendant)
			R36 ⁸ (36" Rigid Pendant)
			R48 (48" Rigid Pendant)
			SW (Surface, White Canopy)
			SB (Surface, Black Canopy)
			SSV (Surface, Silver Canopy)

Notes:

- Available in 120V only
- 0-10V require remote driver box for cable mount option
- Remote driver box required (L3 lumen package, eldoLED, Lutron® & DMXR options)
- Lutron® not available in L3
- DMXR not available in L1 & L2
- Special order, consult factory for lead times
- Title 24; Excludes: 80 CRI
- Special order. Note: 36" Pendant is made with (1) 12" & 24" w/ coupler

GRAVITY LUM-0202-23 P-7

Intense Lighting


3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

©2023 Intense Lighting, LLC. All rights reserved. Subject to change without notice.

GC2DR


2" Gravity LED Downlight Cylinder

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

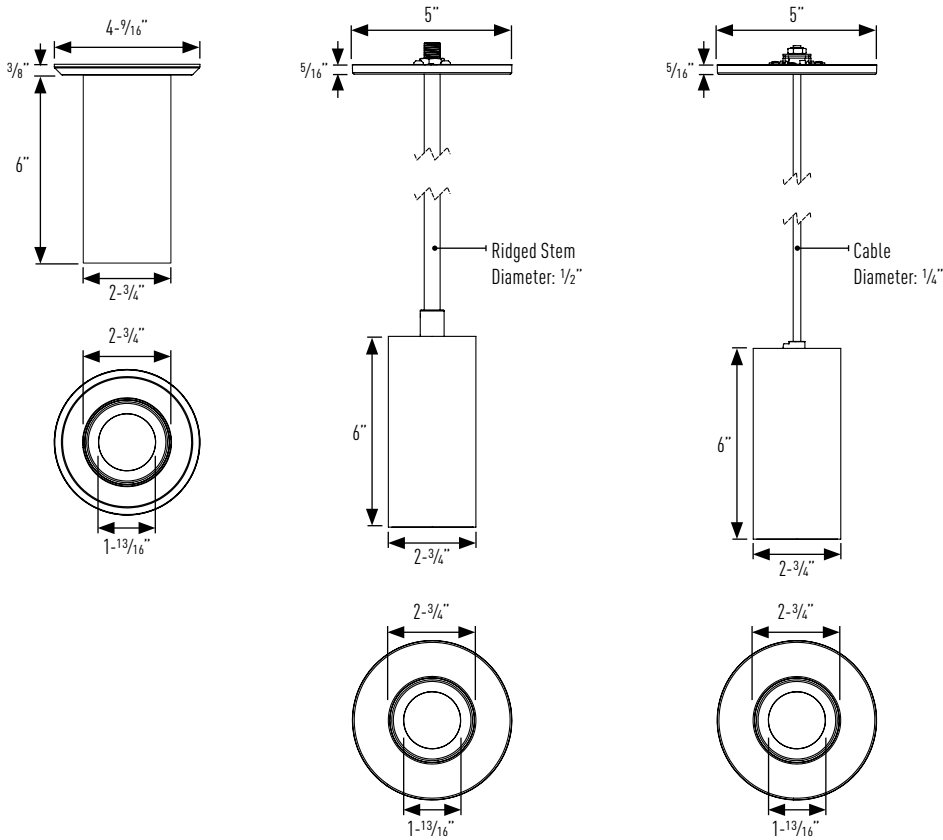

Remote Mounted Driver Options

Remote box included when required by specification

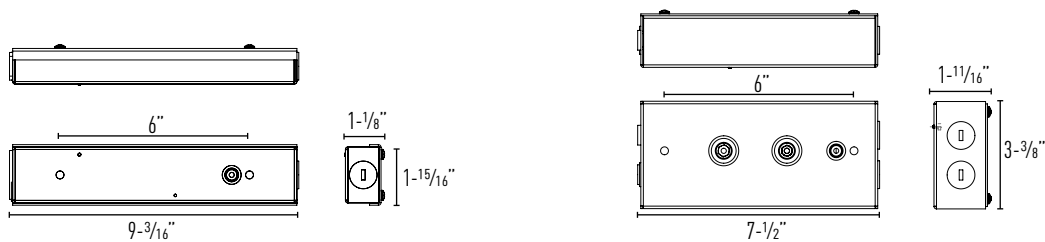

Remote driver box for cable mount option with 0-10V dimming

Note: Wires for class 2 LED driver require a minimum of 18 AWG wire at a maximum of 50 feet length per local and national electrical regulations. Above ceiling access required for servicing

Remote driver box for eldoLED and Lutron® dimming options

Note: Wires for class 2 LED driver require a minimum of 18 AWG wire at a maximum of 50 feet length per local and national electrical regulations. Above ceiling access required for servicing

GC2DR

2" Gravity LED Downlight Cylinder

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

IRDT200WL2


7° Narrow Spot

Report #: ILL-20190114-1 (7)

LED PACKAGE MULTIPLIERS:
IRDT200WL1 (x 0.84)

IRRT200 (%/° REGRESS)
Trim Multiplier (x 0.99)

CCT MULTIPLIERS:
82 CRI
2700K (x 0.93)
3000K (x 1.00)
3500K (x 1.00)



Watts: 16 LPW: 43.2
Lumens: 691 CCT: 3000K

Intensity	
Degree	CBCP
0°	27046
5°	6552
15°	380
25°	69
35°	17
45°	7

IRDT200WL3


16° Spot

Report #: ILL-20190114-1 (16)
ILL-20190114-1 (24)
ILL-20190114-1 (36)
ILL-20190114-1 (48)
ILL-20190114-1 (60)

LED PACKAGE MULTIPLIERS:
IRDT200WL1 (x 0.58)
IRDT200WL2 (x 0.82)

IRRT200 (%/° REGRESS)
Trim Multiplier (x 0.99)


CCT MULTIPLIERS:
82 CRI 92 CRI
2700K (x 0.93) (x 0.76)
3000K (x 1.00) (x 0.87)
3500K (x 1.00) (x 0.87)
4000K (x 1.00) (x 0.87)



Watts: 20 LPW: 79.4
Lumens: 1589 CCT: 3000K

Candelas at Nadir	
Degree	CBCP
0°	15914
5°	13019
15°	1498
25°	276
35°	44
45°	13


24° Narrow Flood



Watts: 20 LPW: 76
Lumens: 1527 CCT: 3000K

Candelas at Nadir	
Degree	CBCP
0°	6324
5°	5589
15°	2374
25°	607
35°	148
45°	25


36° Flood



Watts: 20 LPW: 74
Lumens: 1497 CCT: 3000K

Candelas at Nadir	
Degree	CBCP
0°	4199
5°	3903
15°	2274
25°	789
35°	233
45°	44


48° Wide Flood



Watts: 20 LPW: 69
Lumens: 1390 CCT: 3000K

Candelas at Nadir	
Degree	CBCP
0°	2246
5°	2166
15°	1676
25°	924
35°	385
45°	103

60° Wide Flood



Watts: 20 LPW: 66
Lumens: 1333 CCT: 3000K

Candelas at Nadir	
Degree	CBCP
0°	1435
5°	1393
15°	1242
25°	921
35°	504
45°	170