

GD4AS / ISA400

4" Gravity Warm Dim Square Adjustable

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA

LED Light Engine	Delivered Lumens *	System Wattage **
WD3	1900lm @ 3000K-1800K / 92 CRI	27 Watts
WD4	2400lm @ 3000K-1800K / 92 CRI	34 Watts
WD5	2800lm @ 3000K-1800K / 92 CRI	43 Watts

* Delivered lumens output will vary depending on CCT, CRI, optic and reflector finish.

** System Wattage include driver and LED Module consumption.

FEATURES

- Zero cut off up to 40° vertical adjustment ensures high delivered lumens through precise center beam optics
- Fixed collar accepts up to 1-1/4" ceiling via hanger bar notches

LED LIGHT ENGINE

- 3000K to 1800K dimming at 92 CRI
- Rated life of >50,000 hours L70 based on LED testing per LM-80-08 and projected values using IESNA TM21-11

ELECTRICAL SYSTEM (120V OR 277V)

- Power factor >.9, 50/60Hz
- Multiple dimming drivers available
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

DIMMING

- Forward/reverse phase dimming (120V only)
- 0-10V 1% Dimming
- EldoLED SOLOdrive 0-10V 0.1%
- EldoLED ECOdrive 0-10V 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- Lutron® LTEA2W Hi-Lume 1% 2-Wire LED driver (120V forward phase only)

FRAME CONSTRUCTION

Constructed from 16 and 18 gauge heavy duty powder coated cold rolled steel frame with a large access junction box. ETL listed for through wiring. LED light engine and driver are accessible from above or below ceiling. Horizontal rotation on 90° turns and accommodates ±15° horizontal aiming adjustment off center.

OPTICS

- 20° Spot, 30° Narrow Flood, 40° Flood & 50° Wide Flood
- Optics and filter media are field customizable

REFLECTOR

Specification grade reflector with 1.5mm thickness. Reflector available in clear, haze, white, wheat or black finish. Consult factory for other colors. Architectural, discrete polished self flange standard. Optional painted white flange is available.

INSTALLATION

The luminaire is type Non-IC. Insulation must be kept at a minimum of 3" away from fixture. Accommodates ceiling thickness from 1/2" to 1-1/4". Universal mounting brackets included. Compatible with C-channel, flat bar, wood joist bar hanger and EMT. Bar hangers must be ordered separately. C-channel is recommended for T-bar ceilings. Max. ambient temperature: 131°F (55°C).

EMERGENCY BACKUP



Remote test switch included. External battery operates LED load of up to 7W for 90 minutes (EM7), or 20W for 90 minutes (EM20).

ACCESSORIES


Luminaire will accommodate (2) accessories, accessory holder required.

LISTING / WARRANTY

- ETL Listed to US and Canadian standards for damp locations
- 5-Year Intense LED Limited Warranty

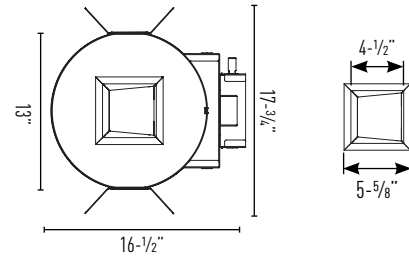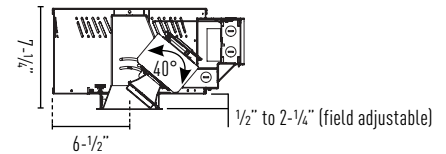

Ceiling Cut Out: 5-1/4" x 5-1/4"
 Maximum Ceiling Thickness: 1-1/4"
 Minimum Ceiling Thickness: 1/2"

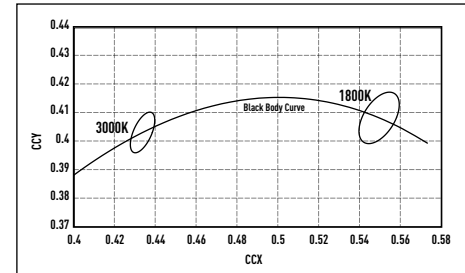

Housing Part Number: (Example: GD4ASWD3-D101-NF)

Housing	Wattage	Dimming	Voltage	Optic	Options
GD4AS	WD3 (27 Watts)	-DIM ¹ (Phase Dimming)	blank (120V)	-SP (20° Spot)	EM7 (7W Emergency Backup)
	WD4 (34 Watts)	-D101 (0-10V Dimming 1%)	27 (277V)	-NF (30° Narrow Flood)	IOTA part #ILB-CP07-A
	WD5 (43 Watts)	-ED10V1 (eldoLED 0-10V 1%)		-FL (40° Flood)	EM20 (20W Emergency Backup w/ Remote Test Switch IOTA ILB-CP20-HE-S)
		-ED10V01 (eldoLED 0-10V 0.1%)		-WF (50° Wide Flood)	I100 (C-Channel Bar Hangers)
		-LUT (Lutron EcoSystem 1%)			I200 (Flat Bar Hangers)
		-LUT2 ¹ (Lutron 2-Wire 1%)			I400 (Wood Joist Bar Hangers)
		-DMXR (DMX512 RDM 0.1%)			

Reflector Part Number: (Example: ISA400HZ-SF)

Reflector	Reflector Finish	Trim
ISA400	B ² (Black)	-SF (Self Flanged)
	C (Clear)	-SFW (Self Flanged White)
	HZ (Haze)	
	W (White)	
	WHT ² (Wheat)	

Accessories

- LH63 (Black Accessory Holder)
- PFL4-63 (Solite Soft Focus Lens)
- PFLMB-63 (Black Hex Louver)

Notes:

- Available in 120V only
- Consult factory for lead times


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

GD4ASWD5 / ISA400HZ

Report #: ILL20190311-13.001 (-20)
 ILL20190312-3.001 (-30)
 ILL20190318-1.001 (-40)
 ILL20190312-9.001 (-50)

LED Package Multipliers:

ISA400WD3 (x 0.67)
 ISA400WD4 (x 0.83)

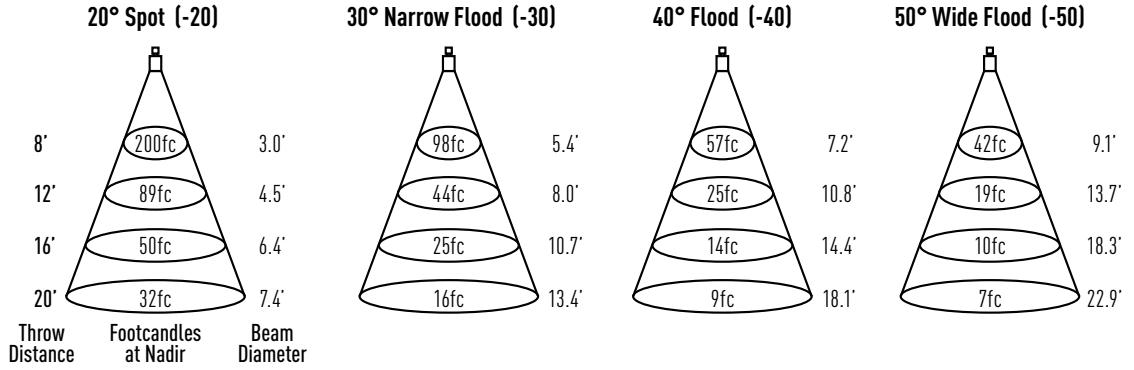

Watts: 43
 Lumens: 3024
 LPW: 70
 CCT: 3000K

Watts: 43
 Lumens: 3068
 LPW: 71
 CCT: 3000K

Watts: 43
 Lumens: 2756
 LPW: 64
 CCT: 3000K

Watts: 43
 Lumens: 2745
 LPW: 63
 CCT: 3000K

Candelas at Nadir

Degree	CBCP
0°	12792
5°	11245
15°	3373
25°	1414
35°	223
45°	111

Candelas at Nadir

Degree	CBCP
0°	6289
5°	5985
15°	3906
25°	1904
35°	355
45°	123

Candelas at Nadir

Degree	CBCP
0°	3648
5°	3561
15°	2808
25°	1750
35°	644
45°	216

Candelas at Nadir




Degree	CBCP
0°	2662
5°	2629
15°	2337
25°	1748
35°	821
45°	311

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Foot candles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				40° HORIZONTAL				40° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
GD4ASWD5-20 20° Spot	12'	89	4.5'	4.5'	12'	10	39.9	7.7"	5.8"	8'	10	53.1	4.6"	7.5"
	20'	32	7.4'	7.4'	20'	17	14.4	12.8"	9.7"	12'	14	23.6"	7"	11.2"
GD4ASWD5-30 30° Narrow Flood	12'	44	8'	8'	12'	10	19.6	14.7"	10.5"	8'	9.5	26.1	8.4"	15.3"
	20'	16	13.4'	13.3'	20'	17	7.1	24.5"	17.5"	12'	14.3	11.6	12.5"	22.9"
GD4ASWD5-40 40° Flood	12'	25	10.8"	10.9"	12'	10.1	11.4	21.6"	14.1"	8'	9.5	15.1	11.2"	24.7"
	20'	9	18.1"	18.1"	20'	16.8	4.1	28.9"	23.6"	12'	14.3	6.7	16.9"	37.1"
GD4ASWD5-50 50° Wide Flood	12'	19	13.7"	13.6"	12'	10	8.3	30"	17.9"	8'	9.5	11	14.2"	40.4"
	20'	7	22.9"	22.7"	20'	16.8	3	49.9"	29.8"	12'	14.3	4.9	21.3"	60.6"