

GD4DS / ISD400

4" Gravity Square LED Downlight

| | | | |
|----------|--|----------------|--|
| JOB NAME | | CATALOG NUMBER | |
| NOTES | | TYPE | |

ELECTRICAL DATA: (Data Based On 3000K/82CRI Configuration)

| LED Light Engine | Nominal Delivered Lumen* | System Wattage** | Efficacy | LED Light Engine | Nominal Delivered Lumen* | System Wattage** | Efficacy |
|------------------|--------------------------|------------------|----------|------------------|--------------------------|------------------|----------|
| L1 | 1000lm | 12W | 83 lm/W | L6 | 3500lm | 37W | 95 lm/W |
| L2 | 1500lm | 15W | 100 lm/W | L7 | 4000lm | 44W | 91 lm/W |
| L3 | 2000lm | 20W | 100 lm/W | L8 | 4500lm | 48W | 94 lm/W |
| L4 | 2500lm | 25W | 100 lm/W | L9 | 5000lm | 55W | 91 lm/W |
| L5 | 3000lm | 31W | 97 lm/W | | | | |

*System Wattage include driver and LED Module consumption. / ** Delivered lumens will vary depending on CCT, CRI and optic selection

FEATURES

- High delivered lumens maintained in ceiling from 1/2" to 2 1/4" using patent pending design
- Future proof luminaire with easy module install via twist-to-lock mounting and driver access through raised junction box

LED LIGHT ENGINE

- 82/92 CRI at 2700K, 3000K, 3500K & 4000K with 2 Step MacAdam (2 SDCM)
- Rated life of >50,000 hours L70 based on LED testing per LM-80-08 and projected values using IESNA TM21-11

DIMMING

- Phase Dimming 120V only, Forward 1% / Reverse 5%
- 0-10V Dimming 1%
- EldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- DMX512 RDM 0.1%

OPTICS

- 14° Narrow Spot, 20° Spot, 30° Narrow Flood, 40° Flood and 50° Wide Flood
- Optics and filter media are field customizable

ELECTRICAL SYSTEM

- Dedicated voltage options of 120V, 277V or 347V. Must be specified in catalog code. Consult factory for 347V
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

FRAME CONSTRUCTION

Constructed from 16 and 18 gauge heavy duty powder coated cold rolled steel frame with a large access junction box. ETL listed for through wiring. LED light engine and driver are accessible from above or below ceiling. Innovative collar is field selectable for ceiling thicknesses from 1/2" to 2 1/4" without reducing delivered lumens.

REFLECTOR

Specification grade reflector with 1.5mm thickness. Reflector available in haze, white, clear or black finish. Consult factory for other colors. Architectural, discrete polished self flange standard. Optional painted white flange is available. Meets RP-1 requirements with controlled light distribution at a 55° cut off.

INSTALLATION

The luminaire is type Non-IC. Insulation must be kept at a minimum of 3" away from fixture. Accommodates ceiling thickness from 1/2" to 2 1/4". Universal mounting brackets included. Compatible with C-channel, flat bar, wood joist bar hanger and EMT. Bar hangers must be ordered separately. C-channel is recommended for T-bar ceilings. Max. ambient temperature: 95°F (35°C).

EMERGENCY BACKUP




Remote test switch included. External battery operates LED load of up to 7W at a minimum of 450 lumens for 90 minutes (EM7), or 20W at a minimum of 1350 lumens for 90 minutes (EM20).

ACCESSORIES

Luminaire will accommodate (2) accessories, accessory holder required.

LISTING / WARRANTY

- ETL Listed to US and Canadian standards for damp locations
- 5-Year Intense LED Limited Warranty
- This product is covered by U.S. Pat. No. 10,274,148.

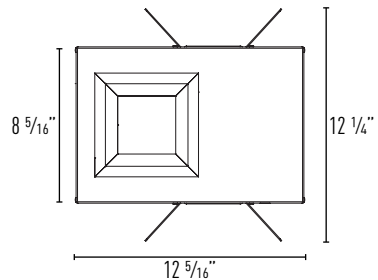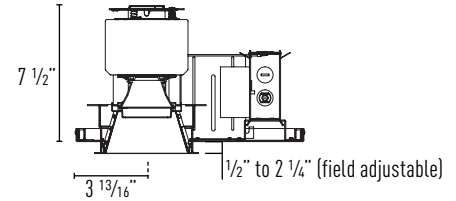

Ceiling Cut Out: 5 1/4" x 5 1/4"
Maximum Ceiling Thickness: 2 1/4"
Minimum Ceiling Thickness: 1/2"

Housing Part Number: (Example: GD4DSL230-D101-NSEM7)

| Housing | Wattage | CCT / CRI | Dimming | Voltage | Optic | Options |
|---------|----------|----------------------|---|------------------------|------------------------------------|--|
| GD4DS | L1 (12W) | 27 (2700K / 82 CRI) | -DIM ¹ (Phase Dimming) | blank (120V) | -NS ⁴ (14° Narrow Spot) | EM7 (7W Emergency Backup) |
| | L2 (15W) | 279 (2700K / 92 CRI) | -D101 (0-10V Dimming 1%) | 27 (277V) | -SP (20° Spot) | IOTA part #ILB-CP07-A |
| | L3 (20W) | 30 (3000K / 82 CRI) | -ED10V1 (eldoLED 0-10V 1%) | 34 ⁶ (347V) | -NF (30° Narrow Flood) | EM20 ⁵ (20W Emergency Backup) |
| | L4 (25W) | 309 (3000K / 92 CRI) | -ED10V01 (eldoLED 0-10V 0.1%) | | -FL (40° Flood) | Bodine part #BSL20LV |
| | L5 (31W) | 35 (3500K / 82 CRI) | -LUT ² (Lutron® LDE1 EcoSystem 1%) | | -WF (50° Wide Flood) | |
| | L6 (37W) | 359 (3500K / 92 CRI) | -DMXR ³ (DMX512 RDM 0.1%) | | | |
| | L7 (44W) | 40 (4000K / 82 CRI) | | | | |
| | L8 (48W) | 409 (4000K / 92 CRI) | | | | |
| | L9 (55W) | | | | | |

Reflector Part Number: (Example: ISD400HZ-SF)

| Reflector | Reflector Finish | Trim |
|-----------|--------------------------|--|
| ISD400 | HZ (Haze) | -SF (Self Flanged) |
| | W (White) | -SFW ⁷ (Self Flanged White) |
| | C (Clear) | |
| | B ^{6,7} (Black) | |

Accessories (Order Separately)

| | |
|----------|--------------------------|
| LH63 | (Black Accessory Holder) |
| LH63W | (White Accessory Holder) |
| PFL2-63 | (Linear Spread Lens) |
| PFL4-63 | (Solite Soft Focus Lens) |
| PFLMB-63 | (Black Hex Louver) |
| I100 | (C-Channel Bar Hangers) |
| I200 | (Flat Bar Hangers) |
| I400 | (Wood Joist Bar Hangers) |

Notes:

- Available in 120V only
- Lutron® dimming not available in L9
- DMX512 RDM not available with L1 & L2
- 14° Optic not available in L8 & L9
- EM20 only available for L4 to L9
- Consult factory for lead times
- Self Flanged White (-SFW) not available with White or Black Reflector Finish

GRAVITY LMB010.24 P-7

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to www.intenselighting.com. For a printed copy of the warranty, you may call 800 961-5321.

© 2024 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.

intense[®] | a LEVITON[®] company

| | | | |
|----------|--|----------------|--|
| JOB NAME | | CATALOG NUMBER | |
| NOTES | | TYPE | |


GD4DSL1 ISD400HZ

Report #: ILL20190102-1.001
ILL20181218-2.001
ILL20181218-5.001
ILL20181218-8.001
ILL20181218-11.001

CCT MULTIPLIERS:

| | | |
|-------|----------|----------|
| | 82 CRI | 92 CRI |
| 2700K | (x 0.95) | (x 0.79) |
| 3000K | (x 1.00) | (x 0.82) |
| 3500K | (x 1.02) | (x 0.85) |
| 4000K | (x 1.03) | (x 0.88) |

-NS (14° Narrow Spot)




Watts: 10 LPW: 87.1
Lumens: 871 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 6243 |
| 5° | 4540 |
| 15° | 690 |
| 25° | 411 |
| 35° | 46 |
| 45° | 27 |

-SP (20° Spot)




Watts: 10 LPW: 89.4
Lumens: 894 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 3203 |
| 5° | 2874 |
| 15° | 1112 |
| 25° | 430 |
| 35° | 64 |
| 45° | 33 |

-NF (30° Narrow Flood)




Watts: 10 LPW: 91.6
Lumens: 916 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 1856 |
| 5° | 1767 |
| 15° | 1179 |
| 25° | 560 |
| 35° | 107 |
| 45° | 39 |

-FL (40° Flood)




Watts: 10 LPW: 80.8
Lumens: 808 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 1196 |
| 5° | 1148 |
| 15° | 860 |
| 25° | 483 |
| 35° | 176 |
| 45° | 70 |

-WF (50° Wide Flood)



Watts: 10 LPW: 80.8
Lumens: 808 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 957 |
| 5° | 940 |
| 15° | 799 |
| 25° | 507 |
| 35° | 203 |
| 45° | 78 |


GD4DSL2 ISD400HZ

Report #: ILL20190102-1.002
ILL20181218-2.002
ILL20181218-5.002
ILL20181218-8.002
ILL20181218-11.002

CCT MULTIPLIERS:

| | | |
|-------|----------|----------|
| | 82 CRI | 92 CRI |
| 2700K | (x 0.95) | (x 0.79) |
| 3000K | (x 1.00) | (x 0.82) |
| 3500K | (x 1.02) | (x 0.85) |
| 4000K | (x 1.03) | (x 0.88) |

-NS (14° Narrow Spot)




Watts: 14 LPW: 99.2
Lumens: 1389 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 9955 |
| 5° | 7240 |
| 15° | 1101 |
| 25° | 655 |
| 35° | 74 |
| 45° | 44 |

-SP (20° Spot)




Watts: 14 LPW: 101.8
Lumens: 1425 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 5107 |
| 5° | 4583 |
| 15° | 1774 |
| 25° | 686 |
| 35° | 103 |
| 45° | 53 |

-NF (30° Narrow Flood)




Watts: 14 LPW: 104.3
Lumens: 1460 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 2960 |
| 5° | 2817 |
| 15° | 1879 |
| 25° | 893 |
| 35° | 170 |
| 45° | 62 |

-FL (40° Flood)




Watts: 14 LPW: 92.1
Lumens: 1289 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 1907 |
| 5° | 1831 |
| 15° | 1372 |
| 25° | 771 |
| 35° | 280 |
| 45° | 111 |

-WF (50° Wide Flood)



Watts: 14 LPW: 92
Lumens: 1288 CCT: 3000K

Luminance

| Degree | CBCP |
|--------|------|
| 0° | 1526 |
| 5° | 1498 |
| 15° | 1275 |
| 25° | 808 |
| 35° | 324 |
| 45° | 124 |

| | | | |
|----------|--|----------------|--|
| JOB NAME | | CATALOG NUMBER | |
| NOTES | | TYPE | |


GD4DSL3 ISD400HZ

Report #: ILL20190102-1.003
ILL20181218-2.003
ILL20181218-5.003
ILL20181218-8.003
ILL20181218-11.003

CCT MULTIPLIERS:

| | | |
|-------|----------|----------|
| | 82 CRI | 92 CRI |
| 2700K | (x 0.95) | (x 0.79) |
| 3000K | (x 1.00) | (x 0.82) |
| 3500K | (x 1.02) | (x 0.85) |
| 4000K | (x 1.03) | (x 0.88) |

-NS (14° Narrow Spot)




Footcandles at Nadir

Watts: 19 LPW: 97.9
Lumens: 1859 CCT: 3000K

| Luminance | |
|-----------|-------|
| Degree | CBCP |
| 0° | 13330 |
| 5° | 9694 |
| 15° | 1474 |
| 25° | 877 |
| 35° | 99 |
| 45° | 59 |

-SP (20° Spot)




Footcandles at Nadir

Watts: 19 LPW: 100.4
Lumens: 1908 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 6839 |
| 5° | 6137 |
| 15° | 2375 |
| 25° | 918 |
| 35° | 137 |
| 45° | 71 |

-NF (30° Narrow Flood)




Footcandles at Nadir

Watts: 19 LPW: 102.9
Lumens: 1955 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 3963 |
| 5° | 3772 |
| 15° | 2516 |
| 25° | 1195 |
| 35° | 228 |
| 45° | 83 |

-FL (40° Flood)




Footcandles at Nadir

Watts: 19 LPW: 90.8
Lumens: 1726 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 2553 |
| 5° | 2452 |
| 15° | 1837 |
| 25° | 1032 |
| 35° | 375 |
| 45° | 148 |

-WF (50° Wide Flood)



Footcandles at Nadir

Watts: 19 LPW: 90.8
Lumens: 1725 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 2043 |
| 5° | 2006 |
| 15° | 1707 |
| 25° | 1082 |
| 35° | 434 |
| 45° | 166 |


GD4DSL4 ISD400HZ

Report #: ILL20190102-1.004
ILL20181218-2.004
ILL20181218-5.004
ILL20181218-8.004
ILL20181218-11.004

CCT MULTIPLIERS:

| | | |
|-------|----------|----------|
| | 82 CRI | 92 CRI |
| 2700K | (x 0.95) | (x 0.79) |
| 3000K | (x 1.00) | (x 0.82) |
| 3500K | (x 1.02) | (x 0.85) |
| 4000K | (x 1.03) | (x 0.88) |

-NS (14° Narrow Spot)




Footcandles at Nadir

Watts: 24 LPW: 96.1
Lumens: 2307 CCT: 3000K

| Luminance | |
|-----------|-------|
| Degree | CBCP |
| 0° | 16536 |
| 5° | 12025 |
| 15° | 1829 |
| 25° | 1088 |
| 35° | 12 |
| 45° | 73 |

-SP (20° Spot)




Footcandles at Nadir

Watts: 24 LPW: 98.6
Lumens: 2367 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 8484 |
| 5° | 7613 |
| 15° | 2946 |
| 25° | 1139 |
| 35° | 170 |
| 45° | 88 |

-NF (30° Narrow Flood)




Footcandles at Nadir

Watts: 24 LPW: 101
Lumens: 2425 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 4917 |
| 5° | 4680 |
| 15° | 3122 |
| 25° | 1483 |
| 35° | 283 |
| 45° | 103 |

-FL (40° Flood)




Footcandles at Nadir

Watts: 24 LPW: 89.2
Lumens: 2141 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 3167 |
| 5° | 3041 |
| 15° | 2279 |
| 25° | 1280 |
| 35° | 466 |
| 45° | 184 |

-WF (50° Wide Flood)



Footcandles at Nadir

Watts: 24 LPW: 89.2
Lumens: 2140 CCT: 3000K

| Luminance | |
|-----------|------|
| Degree | CBCP |
| 0° | 2535 |
| 5° | 2489 |
| 15° | 2117 |
| 25° | 1342 |
| 35° | 539 |
| 45° | 205 |