

ICL-MBW2G2

MBW2G2 Flood Pull Down

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA

LED Light Engine	Wattage Per Head ¹	CCT / CRI	Nominal Delivered Lumens ^{2,3}
L2	20W	3000K / 82 CRI	2350lm
L3	27W	3000K / 82 CRI	3200lm
L4	40W	3000K / 82 CRI	4300lm
L5	59W	3000K / 82 CRI	5700lm

¹ System Wattage include driver and LED Module consumption

² Delivered lumen output will vary depending on CCT and CRI

FEATURES

- Heavy duty die-cast construction
- Retractable pull down with vertical locking
- 312° Horizontal rotation
- 60° Vertical tilt at full pull down position / 30° Vertical tilt at recessed position

LED LIGHT ENGINE

- 92 CRI & 82 CRI in 2700K, 3000K, 3500K and 4100K with 2 SDCM binning
- >50,000 hours average rated life at 70% output

OPTICS

- Two high output LED arrays provide powerful uniform, vertical and horizontal illumination.
- High quality aluminum reflector with diffused anodized finish.

ELECTRICAL SYSTEM

- 120V or 277V 50/60Hz input
- Class 2 power supply
- Over voltage, over current and short circuit protection: Auto recovery
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.
- Multiple dimming drivers available

HOUSING

The luminaire is type Non-IC. Insulation must be kept at a minimum of 3" away from fixture. The inner trim is constructed of 20GA steel painted black, white or silver. The internal wire bundles are locked and covered with a glass sleeve. The housing is supplied with a plate to allow the junction box to be accessible from below the ceiling.

MOUNTING

The luminaires can accommodate a 1/2" to 1 1/4" ceiling thickness. The fixture is supplied with channel brackets that allow up-to 5" vertical adjustment. Compatible with C-channel, flat bar, wood joist bar and EMT. Bar hangers must be ordered separately. C-channel are recommended for T-bar ceilings. Wood joist bar hangers are not for use in T-bar ceilings.

FLANGED TRIM

Extruded trim frame includes torsion springs for convenient installation or removal from the housing.

EMERGENCY




Remote test switch included. External battery operates LED load of up to 7W at a minimum of 700 lumens for 90 minutes. Servicing requires access above ceiling.

ACCESSORIES

Luminaire will accommodate (2) accessories, an accessory holder is required.

LISTING/WARRANTY

- ETL listed to US and Canadian standards for damp locations.
- 5-Year Intense LED Limited Warranty

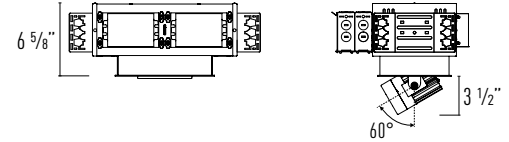

Ceiling Cut Out: 6 3/8" x 8 3/4"

Horizontal Adjustability: 312°

Vertical Adjustability: 60° (full pull down) / 30° (recessed)

Trim Example: ICL-MBW2G2L330-BW

Luminaire	Wattage	CCT / CRI	Driver	Voltage	Finish	Option
ICL-MBW2G2	L2 (20 Watts)	27 (2700K / 82 CRI)	blank (Non-Dimming)	blank (120V)	-BW (Black Interior / White Trim)	1100 (C-Channel Bar Hangers)
	L3 (27 Watts)	279 (2700K / 92 CRI)	-DELV ² (ELV Dimming)	27 (277V)	-WW (White Interior / White Trim)	1200 (Flat Bar Bar Hangers)
L4 (40 Watts)	30 (3000K / 82 CRI)	-D10 (0-10V Dimming 10%)				1400 (Wood Joist Bar Hangers)
	309 (3000K / 92 CRI)	-ED10V1 (eldoLED 0-10V 1%)				EM ⁷ (7W Emergency Backup)
L5 (59 Watts)	35 (3500K / 82 CRI)	-ED10V01 (eldoLED 0-10V 0.1%)				IOTA part #ILB-CP07-A
	359 ¹ (3500K / 92 CRI)	-LUT (Lutron® LDE1 EcoSystem 1%)				
	41 (4100K / 82 CRI)	-LUT2 ² (Lutron® LTEA2W 2-Wire 1%)				
	419 ¹ (4100K / 92 CRI)	-DMXR ³ (DMX512 RDM 0.1%)				

Accessory Holder

- LHW2 (Accessory Holder, White)
- LHW2W (Accessory Holder, Black)

Filters

- PFL-W2-4 (Soft Focus Lens)
- PFL-W2-2-V (Vertical Linear Spread Lens)
- PFL-W2-2-H (Horizontal Linear Spread Lens)

Notes:

1. Consult factory for lead times
2. Dimming available in 120V
3. DMX512 RDM available in L4 & L5 only
4. Access above ceiling required

MB-MULTIPLES LHM-049-20 P-1

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to www.intenselighting.com. For a printed copy of the warranty, you may call 800 961-5321.

© 2020 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.






ICL-MBW2G2L230

Report #: ILL-08162016-02.3
 Luminaire Watts: 20W
 Luminaire Lumens: 2045lm
 Lumens Per Watt: 102
 Color Temperature: 3000K
 Color Rendering Index: 82

Emergency Multiplier:
 7W Emergency (x 0.34)



Candelas at Nadir


Degree	Candela
0°	1953
5°	1934
15°	1724
25°	1392
35°	997
45°	484

APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial footcandles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Footcandles

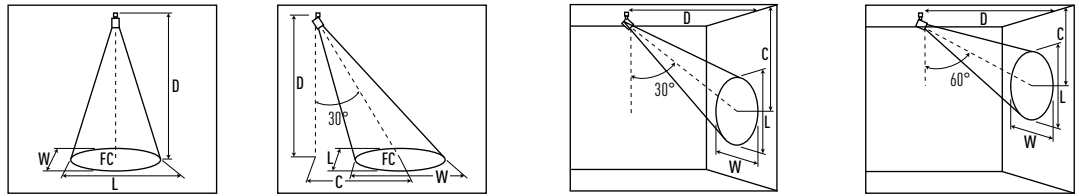

0° HORIZONTAL					30° HORIZONTAL					30° VERTICAL					60° VERTICAL				
D	FC	W	L		D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
6'	54.2	8' 6"	7' 6"		6'	2'	41.4	5' 9"	6' 4"	3'	3'	64.4	4' 8"	5' 2"	3'	2'	82.2	3' 7"	3' 4"
8'	30.5	11' 4"	9' 11"		8'	3'	23.3	7' 9"	8' 6"	4'	4'	36.2	6' 2"	7'	4'	3'	45.1	5'	4' 6"
10'	19.5	14' 1"	12' 5"		10'	3'	14.9	9' 9"	10' 6"	5'	5'	23.2	7' 8"	8' 8"	5'	3'	29.5	6' 1"	5' 6"
12'	13.6	16' 11"	14' 11"		12'	4'	10.4	11' 9"	12' 8"	6'	6'	16.1	9' 3"	10' 6"	6'	4'	20.5	7' 3"	6' 7"

CCT / CRI Multipliers:

- 2700K / 82 CRI (x 0.96)
- 2700K / 92 CRI (x 0.8)
- 3000K / 82 CRI (x 1.00)
- 3000K / 92 CRI (x 0.83)
- 3500K / 82 CRI (x 1.03)
- 3500K / 92 CRI (x 0.86)
- 4100K / 82 CRI (x 1.04)
- 4100K / 92 CRI (x 0.89)

3' From Wall

Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
← 3' From Wall 	1'	128	96	68	96	128	127	94	38	38	94	127	127	93	36	8	36	93	127
	2'	119	99	90	99	119	118	90	55	55	90	118	117	89	47	21	47	89	117
	3'	79	78	72	78	79	78	64	52	52	64	78	77	63	39	33	39	63	77
	4'	50	53	51	53	50	46	43	40	40	43	46	45	39	31	30	31	39	45
	5'	32	35	34	35	32	28	30	28	28	30	28	27	25	24	23	24	25	27
	6'	21	23	23	23	21	18	20	20	20	20	18	16	17	17	17	17	17	16
	7'	14	15	16	15	14	13	14	14	14	14	13	11	12	12	12	12	12	11
	8'	10	11	11	11	10	9	10	10	10	10	9	8	9	9	9	9	9	8
	9'	7	8	8	8	7	7	7	7	7	7	7	6	6	7	7	7	6	6

4' From Wall


Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
← 4' From Wall 	1'	68	64	66	64	68	67	57	41	41	57	67	67	56	35	17	35	56	67
	2'	75	79	77	79	75	73	64	56	56	64	73	73	62	42	36	42	62	73
	3'	68	72	69	72	68	62	59	55	55	59	62	61	54	42	40	42	54	61
	4'	52	55	54	55	52	46	47	44	44	47	46	44	40	36	34	36	40	44
	5'	38	40	40	40	38	33	35	34	34	35	33	30	30	29	28	29	30	30
	6'	27	28	29	28	27	24	25	25	25	25	24	21	22	22	21	22	22	21
	7'	19	20	20	20	19	17	18	18	18	18	17	15	16	16	16	16	16	15
	8'	14	14	15	14	14	12	13	13	13	13	12	11	12	12	12	12	12	11
	9'	10	11	11	11	10	9	10	10	10	10	9	8	9	9	9	9	9	8



JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ICL-MBW2G2L330

Report #: ILL-08162016-02.2
 Luminaire Watts: 27W
 Luminaire Lumens: 2864lm
 Lumens Per Watt: 106
 Color Temperature: 3000K
 Color Rendering Index: 82



Candelas at Nadir

Degree	Candela
0°	2668
5°	2643
15°	2355
25°	1902
35°	1362
45°	662


Emergency Multiplier:
 7W Emergency (x 0.25)

APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial footcandles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Footcandles

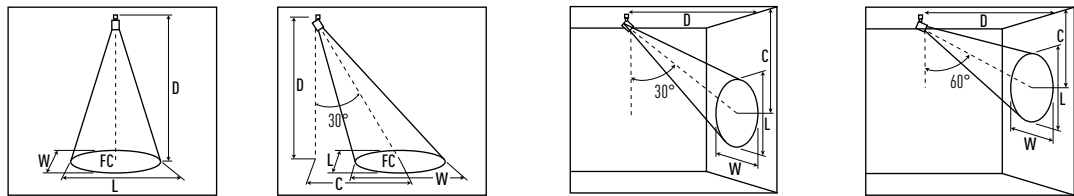

0° HORIZONTAL					30° HORIZONTAL					30° VERTICAL					60° VERTICAL				
D	FC	W	L		D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
6'	74.1	8' 6"	7' 6"		6'	2'	56.6	5' 9"	6' 4"	3'	3'	88	4' 8"	5' 2"	3'	2'	112	3' 7"	3' 4"
8'	41.7	11' 4"	9' 11"		8'	3'	31.8	7' 9"	8' 6"	4'	4'	49.5	6' 2"	7'	4'	3'	61.6	5'	4' 6"
10'	26.7	14' 1"	12' 5"		10'	3'	20.4	9' 9"	10' 6"	5'	5'	31.7	7' 8"	8' 8"	5'	3'	40.3	6' 1"	5' 6"
12'	18.5	16' 11"	14' 11"		12'	4'	14.2	11' 9"	12' 8"	6'	6'	22	9' 3"	10' 6"	6'	4'	28.1	7' 3"	6' 7"

CCT / CRI Multipliers:

- 2700K / 82 CRI (x 0.96)
- 2700K / 92 CRI (x 0.8)
- 3000K / 82 CRI (x 1.00)
- 3000K / 92 CRI (x 0.83)
- 3500K / 82 CRI (x 1.03)
- 3500K / 92 CRI (x 0.86)
- 4100K / 82 CRI (x 1.04)
- 4100K / 92 CRI (x 0.89)

3' From Wall

Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
← 3' From Wall 	1'	175	131	93	131	175	174	128	52	52	128	174	174	127	49	11	49	127	174
	2'	162	136	122	136	162	161	124	76	76	124	161	160	122	64	29	64	122	160
	3'	109	107	98	107	109	106	88	72	72	88	106	105	85	53	45	53	85	105
	4'	69	72	69	72	69	63	59	55	55	59	63	62	54	42	41	42	54	62
	5'	44	47	47	47	44	38	40	39	39	40	38	37	34	32	31	32	34	37
	6'	29	31	32	31	29	25	27	27	27	27	25	22	23	23	23	23	23	22
	7'	20	21	21	21	20	17	19	19	19	19	17	15	16	17	17	17	16	15
	8'	14	15	15	15	14	12	13	14	14	13	12	11	12	12	12	12	12	11
	9'	10	11	11	11	10	9	10	10	10	10	9	8	9	9	9	9	9	8

4' From Wall


Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
← 4' From Wall 	1'	93	87	90	87	93	92	78	57	57	78	92	92	77	48	23	48	77	92
	2'	103	108	105	108	103	100	88	77	77	88	100	100	85	57	49	57	85	100
	3'	93	98	94	98	93	85	81	75	75	81	85	84	73	57	55	57	73	84
	4'	72	75	74	75	72	62	64	60	60	64	62	60	55	50	47	50	55	60
	5'	52	55	54	55	52	45	48	46	46	48	45	41	41	39	38	39	41	41
	6'	36	39	39	39	36	32	34	34	34	34	32	29	30	30	29	30	30	29
	7'	26	27	28	27	26	23	25	25	25	25	23	21	22	22	22	22	22	21
	8'	19	20	20	20	19	17	18	18	18	18	17	15	16	16	16	16	16	15
	9'	14	14	15	14	14	13	13	14	14	13	13	11	12	12	13	12	12	11



ICL-MBW2G2L430

Report #: ILL-08162016-02.1
 Luminaire Watts: 41W
 Luminaire Lumens: 4091lm
 Lumens Per Watt: 100
 Color Temperature: 3000K
 Color Rendering Index: 82

Emergency Multiplier:
 7W Emergency (x 0.17)



Candelas at Nadir


Degree	Candela
0°	3574
5°	3540
15°	3155
25°	2547
35°	1824
45°	886

APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial footcandles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Footcandles

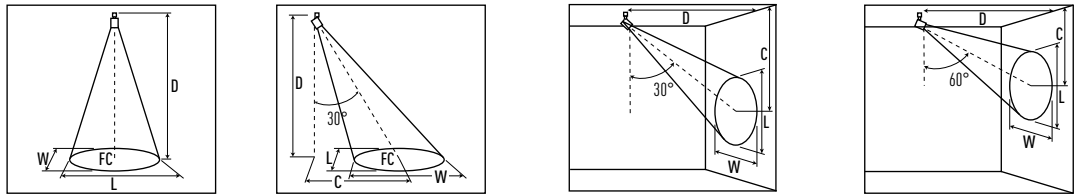

0° HORIZONTAL					30° HORIZONTAL					30° VERTICAL					60° VERTICAL				
D	FC	W	L		D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
6'	99.3	8' 6"	7' 6"		6'	2'	75.8	5' 9"	6' 4"	3'	3'	118	4' 8"	5' 2"	3'	2'	150	3' 7"	3' 4"
8'	55.8	11' 4"	9' 11"		8'	3'	42.6	7' 9"	8' 6"	4'	4'	66.3	6' 2"	7'	4'	3'	82.5	5'	4' 6"
10'	35.7	14' 1"	12' 5"		10'	3'	27.3	9' 9"	10' 6"	5'	5'	42.4	7' 8"	8' 8"	5'	3'	53.9	6' 1"	5' 6"
12'	24.8	16' 11"	14' 11"		12'	4'	19	11' 9"	12' 8"	6'	6'	29.5	9' 3"	10' 6"	6'	4'	37.6	7' 3"	6' 7"

CCT / CRI Multipliers:

- 2700K / 82 CRI (x 0.96)
- 2700K / 92 CRI (x 0.8)
- 3000K / 82 CRI (x 1.00)
- 3000K / 92 CRI (x 0.83)
- 3500K / 82 CRI (x 1.03)
- 3500K / 92 CRI (x 0.86)
- 4100K / 82 CRI (x 1.04)
- 4100K / 92 CRI (x 0.89)

3' From Wall

Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
 ← 3' From Wall	1'	234	176	125	176	234	233	171	70	70	171	233	233	170	65	14	65	170	233
	2'	217	182	164	182	217	215	165	101	101	165	215	214	163	85	39	85	163	214
	3'	145	143	131	143	145	142	118	96	96	118	142	141	114	71	60	71	114	141
	4'	92	97	93	97	92	84	80	74	74	80	84	83	72	56	55	56	72	83
	5'	59	63	63	63	59	51	54	52	52	54	51	49	46	43	41	43	46	49
	6'	39	42	42	42	39	33	37	36	36	37	33	30	31	31	30	31	31	30
	7'	26	28	29	28	26	23	25	25	25	25	23	20	22	22	22	22	22	20
	8'	19	20	20	20	19	17	18	18	18	17	14	16	16	16	16	16	16	14
	9'	13	14	14	14	13	12	13	13	13	12	11	12	12	12	12	12	12	11

4' From Wall


Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
 ← 4' From Wall	1'	125	117	121	117	125	123	105	76	76	105	123	123	103	64	31	64	103	123
	2'	138	145	141	145	138	134	117	103	103	117	134	133	114	76	66	76	114	133
	3'	124	132	126	132	124	114	108	100	100	108	114	112	98	76	74	76	98	112
	4'	96	101	99	101	96	83	86	81	81	86	83	81	74	67	63	67	74	81
	5'	69	73	73	73	69	60	64	62	62	64	60	55	55	53	51	53	55	55
	6'	49	52	53	52	49	43	46	46	46	46	43	38	41	40	39	40	41	38
	7'	34	37	37	37	34	31	33	33	33	33	31	28	30	30	29	30	30	28
	8'	25	26	27	26	25	23	24	25	25	24	23	20	22	22	22	22	22	20
	9'	18	19	20	19	18	17	18	18	18	17	15	16	17	17	17	17	16	15



ICL-MBW2G2L530

Report #: ILL-08162016-02
 Luminaire Watts: 59W
 Luminaire Lumens: 5730lm
 Lumens Per Watt: 97
 Color Temperature: 3000K
 Color Rendering Index: 82

Emergency Multiplier:
 7W Emergency (x 0.12)



Candelas at Nadir





Degree	Candela
0°	4765
5°	4719
15°	4206
25°	3397
35°	2432
45°	1181

APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial footcandles at the center of the beam.

- W** Beam width
- L** Beam length
- C** Distance to center of beam
- D** Distance
- FC** Footcandles



0° HORIZONTAL					30° HORIZONTAL					30° VERTICAL					60° VERTICAL				
D	FC	W	L		D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
6'	132	8' 6"	7' 6"		6'	2'	101	5' 9"	6' 4"	3'	3'	157	4' 8"	5' 2"	3'	2'	201	3' 7"	3' 4"
8'	74.4	11' 4"	9' 11"		8'	3'	56.8	7' 9"	8' 6"	4'	4'	88.4	6' 2"	7'	4'	3'	110	5'	4' 6"
10'	47.6	14' 1"	12' 5"		10'	3'	36.4	9' 9"	10' 6"	5'	5'	56.6	7' 8"	8' 8"	5'	3'	71.9	6' 1"	5' 6"
12'	33.1	16' 11"	14' 11"		12'	4'	25.3	11' 9"	12' 8"	6'	6'	39.3	9' 3"	10' 6"	6'	4'	50.1	7' 3"	6' 7"

CCT / CRI Multipliers:

- 2700K / 82 CRI (x 0.96)
- 2700K / 92 CRI (x 0.8)
- 3000K / 82 CRI (x 1.00)
- 3000K / 92 CRI (x 0.83)
- 3500K / 82 CRI (x 1.03)
- 3500K / 92 CRI (x 0.86)
- 4100K / 82 CRI (x 1.04)
- 4100K / 92 CRI (x 0.89)

3' From Wall

Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
 ← 3' From Wall	1'	312	235	167	235	312	311	228	93	93	228	311	310	227	87	19	87	227	310
	2'	289	242	219	242	289	287	221	135	135	221	287	286	218	114	52	114	218	286
	3'	194	191	175	191	194	189	157	128	128	157	189	188	153	94	81	94	153	188
	4'	123	129	124	129	123	112	106	98	98	106	112	110	96	75	73	75	96	110
	5'	79	84	84	84	79	68	72	69	69	72	68	65	61	57	55	57	61	65
	6'	52	56	57	56	52	44	49	49	49	49	44	40	41	42	41	42	41	40
	7'	35	38	38	38	35	31	34	34	34	34	31	27	29	30	30	30	29	27
	8'	25	26	27	26	25	22	24	24	24	24	22	19	21	22	22	22	21	19
	9'	18	19	19	19	18	16	17	18	18	17	16	14	16	16	16	16	16	14

4' From Wall

Distance From Wall	Distance From Ceiling	4' Centers					5' Centers					6' Centers							
		4'					5'					6'							
 ← 4' From Wall	1'	167	156	161	156	167	164	140	101	101	140	164	164	137	85	41	85	137	164
	2'	184	193	188	193	184	179	157	138	138	157	179	178	152	102	88	102	152	178
	3'	166	176	168	176	166	152	144	133	133	144	152	150	131	102	98	102	131	150
	4'	128	134	132	134	128	111	115	108	108	115	111	107	98	89	83	89	98	107
	5'	92	98	97	98	92	80	86	82	82	86	80	73	74	70	67	70	74	73
	6'	65	69	70	69	65	58	61	61	61	61	58	51	54	53	51	53	54	51
	7'	46	49	50	49	46	42	44	44	44	44	42	37	40	39	39	39	40	37
	8'	33	35	36	35	33	30	32	33	33	32	30	27	29	29	29	29	29	27
	9'	24	26	26	26	24	22	24	24	24	24	22	20	22	22	22	22	22	20

DIMMING COMPATIBILITY


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

0-10V DIMMING

- 120V/277V
- Dims down to 10%, 1% or 0.1% light output
- Consult dimming manufacturer for installation instructions and power packs

COMPATIBLE DIMMERS

Manufacturer	Part Number(s)
HUNT	PS-010-IV-120V, PS-010-WH-120V, PS-010-3W-IV-120, PS-010-3W-WH-120V, PS-010-IV-277V, PS-010-WH-277V, PS-010-3W-IV-277V, PS-010-3W-WH-277V, FD-010: PS-IFC-010-IV, PS-IFC-010-WH-120/277V, FD-010: PS-IFC-010-3W-IV, PS-IFC-010-3W-WH-120/277V, FD-010-120V, FD-010-277V
Leviton	Leviton Centura Fluorescent Control System, IllumaTech™ IP7 Series, DPSPE-212
Lightolier	ZP600FAM120, MP1500FAM120, V2000FAMU
Lithonia	LEQ BC, LEQ LVBC, SLD LVBC, SQ1DC
Lutron	DVTV, NTFTV
Synergy	ISD BC 120/277

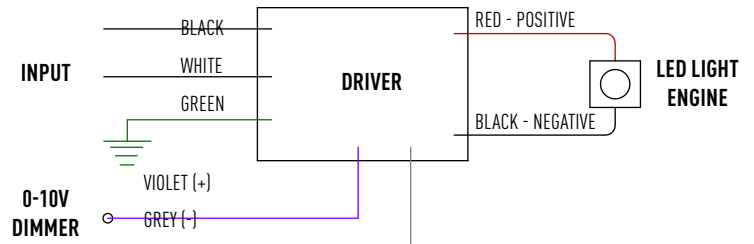

ELV DIMMING

- 120V only
- Dims down to 1%
- Consult dimming manufacturer for installation instructions


COMPATIBLE DIMMERS

Product	Part Number(s)	Type
Leviton	IPED4	Reverse
Leviton	IP106-1LZ	Forward
Leviton	6633-P	Forward
Lutron	DVELV300P	Reverse
Lutron	DVCL-153P	Forward
Lutron	S600P	Forward
Cooper	DLC03P	Forward
Cooper	DAL06P	Forward




DALI DIMMING

- 120V or 277V
- Dims down to 1% or 0.1% light output

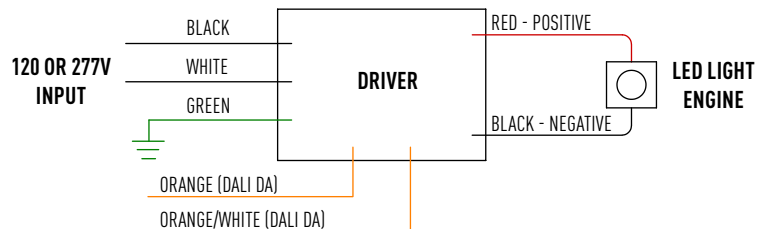

DMX512 RDM DIMMING

- 120V or 277V
- Dims down to 0.1% light output
- RDM channel programmable

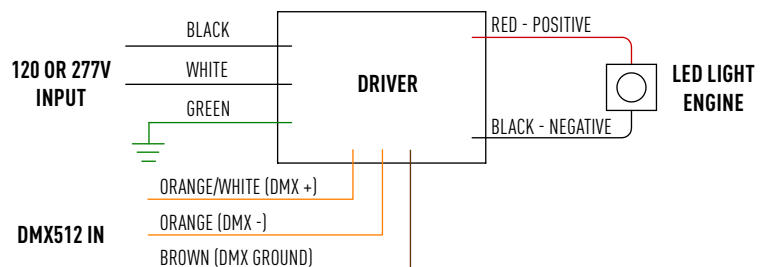

DIMMING COMPATIBILITY


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

LUTRON ECOSYSTEM® DIMMING

- 120V or 277V
- Dims down to 1%
- Consult dimming manufacturer for installation instructions

COMPATIBLE DIMMERS

CS-1L-WM, CS-2L-WM, CS-1L-CM, CS-2L-CM, EcoSystem ESN, Grafik Eye QS with EcoSystem, Quantum

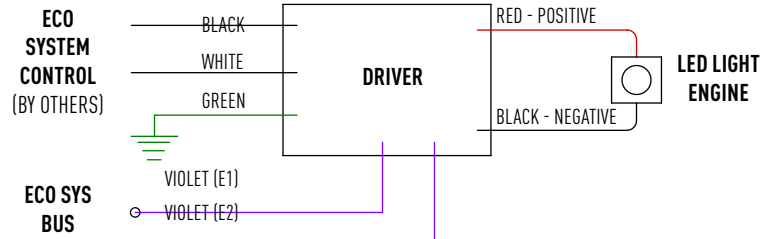

LUTRON HI-LUME® DIMMING

- 120V or 277V
- Dims down to 1%
- Consult dimming manufacturer for installation instructions

COMPATIBLE DIMMERS

AYF-103P, AYF-103P-277, DVF-103, DVF-103P-277, DVSCF-103P, DVSCF-103P-277, HQRD-F6AN-DV, LXF-103PL, LXF-103PL-277, NF-10, NF-103P, NF-103P-277, NF-10-277, NTF-10, NTF-103P, NTF-103P-277, NTF-10-277, RRD-F6AN-DV, SF-12P-277-3, SF-103P, MAF-6AM, MAF-6AM-277, MSCF-6AM, MCSF-6AM-277, MRF2-F6AN-DV, SF-10P, SF-12P-277, SPSF-6A, SPSF-6A-277, SPSF-6AM, SPSF-6AM-277, VF-10, VTF-6AM

