

# MR16-MXWSTL

3.5" MX MR16 Square Trimless Wall Wash

<b>JOB NAME</b>		<b>CATALOG NUMBER</b>	
<b>NOTES</b>		<b>TYPE</b>	

Catalog Number	Lamp Type	Socket Type	Maximum Wattage
<b>MXT-STLW300-GU53</b>	12V MR16	GU5.3	15W LED / 20W Halogen
<b>MXT-STLW300-GU10</b>	120V MR16	GU10	15W LED / 20W Halogen

### LAMP (ORDERED SEPARATELY)

- 12V MR16 GU5.3 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 1.83" (46.4mm)
- 12V MR16 GU5.3 Halogen 20W max. (must use MR16 with front cover glass) - lamp diameter up to 1.97" and MOL of 1.83"
- 120V MR16 GU10 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)
- 120V MR16 GU10 Halogen 20W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)

### ELECTRICAL SYSTEM

- Power factor >.9, 50/60Hz
- Multiple electronic transformers available, dimming on 120V only
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

### TRANSFORMERS (Check LED compatibility with lamp manufacturer):

- NT - GU10 without transformer with 120V input (20W max.)
- T1 - Hatch RS12-15(X)-LED 120V input/12V output 15W max., no minimum load
- T2 - Hatch RS12-60(X) 120V input/12V output 20W max., no minimum load
- T3 - Hatch RS12-80-277(X) 277V input/12V output 20W max., minimum load 10W (not recommended for LED)

### HOUSING

Heavy duty black powder coated 18 gauge steel frame. Standard plaster frame accommodates 5/8" ceiling thickness. Extended collar options available for ceilings up to 1" or 2" thick, must specify.

### TRIM SPECIFICATION

High performance wall wash with asymmetric distribution provides uniform vertical illumination (see spacing criteria on next pages). Durably constructed with die-cast A380 aluminum and powder coat finish. Perforated mesh frame provided, adheres to joint compound for seamless and trimless mounting.

### INSTALLATION


Housing types include IC Air-Tight or Non-IC Rated (must specify). Non-IC rated housings must be kept at a minimum of 3" away from insulation. Butterfly brackets are compatible with adjustable bar hangers (14"-25") and EMT. Bar hangers must be ordered separately. Consult lamp manufacturer for maximum ambient temperature.

### LISTINGS

- ETL Listed to US and Canadian standards for damp locations
- (-AIC Only) Air Tight Certified ASTM E283
- (-AIC Only) ETL listed for direct contact w/insulation



MXT-STLW300



Housing dimensions are on Page 2

### Housing Part Number (Example: MR16-MXWSTL-ICT1)

Housing	Installation Type	Ceiling Thickness	Transformer	Options
<b>MR16-MXWSTL</b>	-NC (Non-IC)	blank (5/8")	<b>NT</b> (GU10 120V No Transformer)	<b>I200</b> (Flat Bar Hangers)
	-IC (Air-Tight IC)	<b>EC1</b> (1")	<b>T1</b> (120V/12V RS12-15X-LED)	<b>I400</b> (Wood Joist Bar Hangers)
		<b>EC2</b> (2")	<b>T2</b> (120V/12V RS12-60X)	
			<b>T3</b> (277V/12V RS12-80X)	

### Trim Part Number (Example: MXT-STLW300W-GU53)


Trim	Finish	Base Type
<b>MXT-STLW300</b> (1" Regress)	<b>B</b> (Black)	<b>-GU53</b> (12V MR16)
	<b>W</b> (White)	<b>-GU10</b> (120V MR16)
	<b>SN</b> (Satin Nickel)	
	<b>AB</b> (Antique Bronze)	
	<b>WH</b> (Wheat)	

# MR16-MXWSTL

3.5" MX MR16 Square Trimless Wall Wash

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## NON-IC & AIR TIGHT IC DIMENSIONS

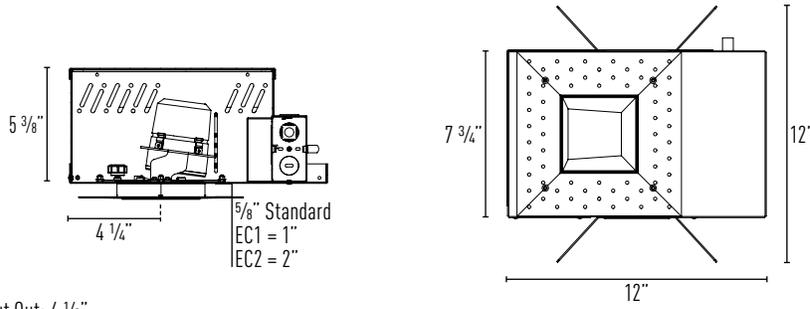

Ceiling Cut Out: 4 1/8"