

# SD6DR / IC630

6" SD LED Downlight

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## ELECTRICAL DATA

LED Light Engine	System Wattage* @ 120V	CCT	Nominal Delivered Lumens**	Efficacy
L0	8W	3500K	750 lm	94 lm/W
L1	10W	3500K	1000 lm	102 lm/W
L2	14W	3500K	1500 lm	110 lm/W
L3	19W	3500K	2000 lm	108 lm/W
L4	23W	3500K	2500 lm	111 lm/W
L5	28W	3500K	3000 lm	110 lm/W
L6	33W	3500K	3500 lm	108 lm/W
L7	38W	3500K	4000 lm	108 lm/W

\*System Wattage includes driver and LED Module consumption. | \*\*Delivered lumen output will vary depending on CCT selection.

### LED MODULE / OPTICS

- 80/90 CRI at 2700K, 3000K, 3500K, 4000K with 2 SDCM
- 70% lumen maintenance at 50,000 hours
- 30° Narrow Flood, 50° Flood or 70° Wide Flood

### ELECTRICAL SYSTEM

- Dedicated voltage options of 120V, 277V or 347V must be specified in catalog code.
- Phase dimming available in 120V only
- 347V available with Osram 0-10V 1% Dimming only

### FRAME CONSTRUCTION

Heavy duty galvanized steel frame with a large access junction box. ETL listed for through wiring. LED light engine and driver are accessible from above or below ceiling.

### INSTALLATION

The luminaire is type Non-IC. Insulation must be kept at a minimum of 3" away from fixture. Universal mounting brackets included. Compatible with C-channel, flat bar, wood joist bar hanger and EMT. Bar hangers must be ordered separately. C-channel is recommended for T-bar ceilings. Maximum ceiling thickness is 1 1/4". Max. ambient temperature: 95°F (35°C).

### REFLECTOR

Specification grade reflector with 1.2mm thickness. Architectural, discrete polished self flange standard. Optional painted white flange is available. Meets RP-1 requirements with controlled light distribution at a 50° cut off.

### DIMMING

- 0-10V Dimming 1%
- Phase Dimming 120V only, Forward 1% / Reverse 5%
- EldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- DMX512 RDM 0.1%

### EMERGENCY BACKUP


External battery operates LED load of up to 7W at a minimum of 850 lumens for 90 minutes (EM7), or 20W at a minimum of 2350 lumens for 90 minutes (EM20). Available with remote or integral test switch, must specify.

### intellect™

- Integrated control system provides occupancy and light level detection, and controls the load directly by the power control module Integrated intelligent fixture controls
- Visit Leviton [intellect™](#) for more info

### LISTING/WARRANTY

- ETL listed to US and Canadian standards for damp locations.
- 5-Year Intense LED Limited Warranty
- ENERGY STAR® Qualified<sup>10</sup>

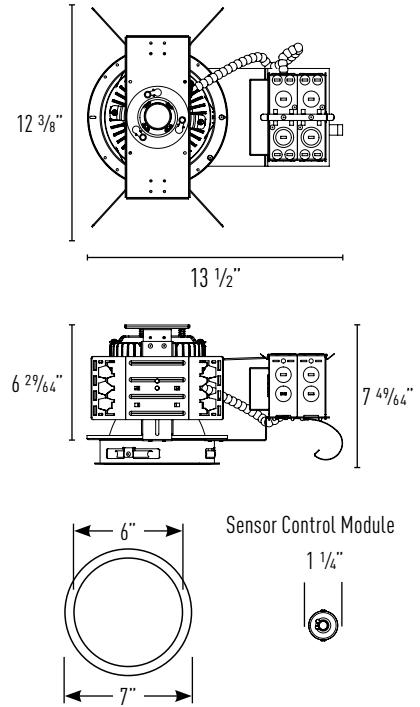

Ceiling Cut Out: 6 1/2"  
Maximum Ceiling Thickness: 1 1/4"

### Housing Part Number (Example: SD6DRL4359-D101-NFEM7)

Housing	LED Module	CCT / CRI	Dimming	Voltage	Optic	Options
SD6DR	L0 <sup>1</sup> (8W)	27 (2700K / 80 CRI)	-D101 (Osram 0-10V 1%)	blank (120V)	-NF (30°)	EM7 (7W Emergency Backup w/ Remote Test Switch <a href="#">IOTA part #ILB-CP07-A</a> )
	L1 (10W)	279 (2700K / 90 CRI)	-IE <sup>2</sup> (Intellect Wireless 1%)	27 (277V)	-FL (50°)	EM7T (7W Emergency Unit w/ Integral Test Switch <a href="#">IOTA part #ILB-CP07-R</a> )
	L2 (14W)	30 (3000K / 80 CRI)	-DIM <sup>4,5</sup> (Phase Dimming)	34 <sup>8</sup> (347V)	-WF (70°)	EM20 <sup>9</sup> (20W Emergency Backup w/ Remote Test Switch <a href="#">IOTA ILB-CP20-HE-S</a> )
	L3 (19W)	309 (3000K / 90 CRI)	-ED10V1 (eldoLED 0-10V 1%)			
	L4 (23W)	35 (3500K / 80 CRI)	-ED10V01 (eldoLED 0-10V 0.1%)			
	L5 (28W)	359 (3500K / 90 CRI)	-LUT <sup>6</sup> (Lutron® LDE1 EcoSystem 1%)			
	L6 (33W)	40 (4000K / 80 CRI)	-DMXR <sup>7</sup> (DMX512 RDM 0.1%)			
	L7 <sup>2</sup> (38W)	409 (4000K / 90 CRI)				

### Reflector Part Number (Example: IC630HZ-SFE,7T)

Reflector	Reflector / Flange Finish	Option
IC630	C-SF (Clear, Self-Flanged)	EM7T (Integral Test Switch)
	C-SFW (Clear, Self-Flanged White)	
	HZ-SF (Haze, Self-Flanged)	
	HZ-SFW (Haze, Self-Flanged White)	

### Accessories

- I100 (C-Channel Bar Hangers)
- I200 (Flat Bar Hangers)
- I400 (Wood Joist Bar Hangers)

### Notes:

- L0 only available with -D101
- 347V Not available with L7 option
- Intellect not available with eldoLED, Lutron, Dali or DMX Dimming (Integrated intellect control system includes sensor and power pack. Keypad Room Controller must be specified separately)
- Not available in L1 & L2
- Not available in 277V
- Lutron not available in L1 & L7
- DMX512 RDM not available in L1 & L2
- 347V only available with Osram 0-10V 1% Dimming
- 20W emergency not available in L1, L2 & L3
- ENERGY STAR® Qualified (0-10V & ELV only. Excludes CCT/CRI options 279, 309 & 359)

SS-DOWNLIGHTING LUM-053124 P.25

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to [www.intenselighting.com](#). For a printed copy of the warranty, you may call 800 961-5321.

© 2024 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.

# SD6DR / IC630

6" SD LED Downlight

<b>JOB NAME</b>		<b>CATALOG NUMBER</b>	
<b>NOTES</b>		<b>TYPE</b>	

Electrical Table					
Lumen Package	Voltage	Wattage	VA	Input Current	Power Factor
L0	120	7.43	7.99	0.07	0.930
	277	8.41	11.87	0.04	0.709
L1	120	9.75	10.37	0.09	0.94
	277	10.82	14.18	0.05	0.76
L2	120	13.71	14.35	0.12	0.96
	277	14.85	18.06	0.07	0.82
L3	120	18.27	18.54	0.15	0.99
	277	19.77	22.92	0.08	0.86
L4	120	22.74	23.04	0.19	0.99
	277	24.09	27.31	0.10	0.88
L5	120	27.18	27.44	0.23	0.99
	277	28.93	32.00	0.12	0.90
L6	120	32.76	32.84	0.27	1.00
	277	34.09	36.72	0.13	0.93
L7	120	37.71	37.79	0.31	1.00
	277	38.86	41.77	0.15	0.93

# SD6DR / IC630

6" SD LED Downlight

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## SD6DRL1358 IC630C


### CCT MULTIPLIERS:

	80 CRI	90 CRI
2700K	(x 0.92)	(x 0.79)
3000K	(x 0.98)	(x 0.79)
3500K	(x 1.00)	(x 0.82)
4000K	(x 1.01)	(x 0.84)

### FINISH MULTIPLIERS

	30°	50°	70°
Clear	(x 1.00)	(x 1.00)	(x 1.00)
Haze	(x 0.96)	(x 0.96)	(x 0.88)
White	(x 0.96)	(x 0.97)	(x 0.90)


### -NF (30° Narrow Flood)



Footcandles at Nadir  
**Watts: 10**    **LPW: 98.2**  
**Lumens: 982**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	3536
5°	3159
15°	1491
25°	449
35°	108
45°	5


### -FL (50° Flood)



Footcandles at Nadir  
**Watts: 10**    **LPW: 107**  
**Lumens: 1070**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	1768
5°	1683
15°	1484
25°	879
35°	131
45°	6

### -WF (70° Wide Flood)



Footcandles at Nadir  
**Watts: 10**    **LPW: 101.8**  
**Lumens: 1018**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	1526
5°	1428
15°	1047
25°	707
35°	349
45°	45

## SD6DRL2358 IC630C


### CCT MULTIPLIERS:

	80 CRI	90 CRI
2700K	(x 0.92)	(x 0.79)
3000K	(x 0.98)	(x 0.79)
3500K	(x 1.00)	(x 0.82)
4000K	(x 1.01)	(x 0.84)

### FINISH MULTIPLIERS

	30°	50°	70°
Clear	(x 1.00)	(x 1.00)	(x 1.00)
Haze	(x 0.96)	(x 0.96)	(x 0.88)
White	(x 0.96)	(x 0.97)	(x 0.90)


### -NF (30° Narrow Flood)



Footcandles at Nadir  
**Watts: 14**    **LPW: 105.1**  
**Lumens: 1472**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	5305
5°	4739
15°	2237
25°	674
35°	162
45°	8


### -FL (50° Flood)



Footcandles at Nadir  
**Watts: 14**    **LPW: 114.6**  
**Lumens: 1604**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	2652
5°	2525
15°	2226
25°	1318
35°	196
45°	10

### -WF (70° Wide Flood)



Footcandles at Nadir  
**Watts: 14**    **LPW: 109.1**  
**Lumens: 1528**    **CCT: 3500K**

Luminance	
Degree	CBCP
0°	2288
5°	2142
15°	1571
25°	1061
35°	524
45°	67

# SD6DR / IC630

6" SD LED Downlight

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## SD6DRL3358 IC630C


### CCT MULTIPLIERS:

	80 CRI	90 CRI
2700K	(x 0.92)	(x 0.79)
3000K	(x 0.98)	(x 0.79)
3500K	(x 1.00)	(x 0.82)
4000K	(x 1.01)	(x 0.84)

### FINISH MULTIPLIERS

	30°	50°	70°
Clear	(x 1.00)	(x 1.00)	(x 1.00)
Haze	(x 0.96)	(x 0.96)	(x 0.88)
White	(x 0.96)	(x 0.97)	(x 0.90)


### -NF (30° Narrow Flood)



Footcandles at Nadir  
 Watts: 19      LPW: 103.2  
 Lumens: 1960      CCT: 3500K

Luminance	
Degree	CBCP
0°	7060
5°	6308
15°	2978
25°	896
35°	215
45°	11


### -FL (50° Flood)



Footcandles at Nadir  
 Watts: 19      LPW: 112.4  
 Lumens: 2136      CCT: 3500K

Luminance	
Degree	CBCP
0°	3530
5°	3360
15°	2963
25°	1754
35°	262
45°	13

### -WF (70° Wide Flood)



Footcandles at Nadir  
 Watts: 19      LPW: 107  
 Lumens: 2033      CCT: 3500K

Luminance	
Degree	CBCP
0°	3046
5°	2850
15°	2090
25°	1412
35°	697
45°	89

## SD6DRL4358 IC630C


### CCT MULTIPLIERS:

	80 CRI	90 CRI
2700K	(x 0.92)	(x 0.79)
3000K	(x 0.98)	(x 0.79)
3500K	(x 1.00)	(x 0.82)
4000K	(x 1.01)	(x 0.84)

### FINISH MULTIPLIERS

	30°	50°	70°
Clear	(x 1.00)	(x 1.00)	(x 1.00)
Haze	(x 0.96)	(x 0.96)	(x 0.88)
White	(x 0.96)	(x 0.97)	(x 0.90)


### -NF (30° Narrow Flood)



Footcandles at Nadir  
 Watts: 23      LPW: 106.5  
 Lumens: 2450      CCT: 3500K

Luminance	
Degree	CBCP
0°	8829
5°	7888
15°	3724
25°	1121
35°	269
45°	13


### -FL (50° Flood)



Footcandles at Nadir  
 Watts: 23      LPW: 116.1  
 Lumens: 2670      CCT: 3500K

Luminance	
Degree	CBCP
0°	4414
5°	4202
15°	3705
25°	2193
35°	327
45°	16

### -WF (70° Wide Flood)



Footcandles at Nadir  
 Watts: 23      LPW: 110.6  
 Lumens: 2543      CCT: 3500K

Luminance	
Degree	CBCP
0°	3808
5°	3564
15°	2614
25°	1766
35°	871
45°	112