

Title 24 Track Current Limiting Feeds


Two Circuit Track System

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

IS225-T24



IS226-T24

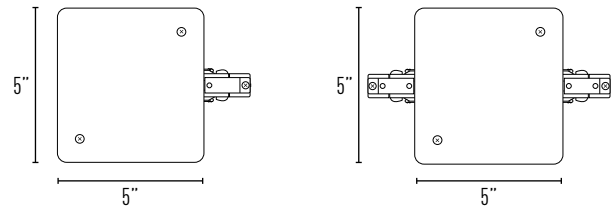

Order Matrix | Example: IS225W-2A-t24

A		B		C	
A	Catalog Number			C	Amperage
IS225	Two Circuit End Feed	-1A-T24	120W/1A		
IS226	Two Circuit In-Line Feed	-2A-T24	240W/2A		
		-3A-T24	360W/3A		
		-5A-T24	600W/5A		
		-7A-T24	840W/7A		
		-8A-T24	960W/8A		
		-10A-T24	1200W/10A		
		-12A-T24	1440W/12A		
B	Finish				
B	Black				
W	White				

DESCRIPTION

Current limiters are intended to be installed at every track feed location in place of a standard non-limiting feed. These feeds incorporate a circuit breaker which are designed to limit available wattage to the track and includes a 12" permanently mounted track that complies California Title 24 energy code. Without a current limiter lighting loads are being calculated by the overall length of the track multiplied by 45W.

FEATURES

- Available in in-line or end feed
- Up to (8) different amperages
- Two different finishes
- Self luminous ON/OFF breaker switch
- Plastic polycarbonate cover

END FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side
- Includes 12" permanently mounted track with end cap, must order track connector separately

IN-LINE FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side
- Includes (2) 12" permanently mounted tracks with end caps, must order (2) track connectors separately

ELECTRICAL

- 120V/60Hz capacity
- All wiring should meet National and local electrical codes
- Use 12 gauge, 90°C minimum supply wire

LISTING

- ETL Listed to US and Canadian standards for dry locations
- Certified to high efficiency requirements of California Title 24. Certified by the California Energy Commission (CEC)

